

Installation plan Vented dryer



PDR 507 EL

It is **essential** to read the operating and installation instructions before installation and commissioning. This prevents both personal injury and damage to the appliance.

United Kingdom

Miele Co. Ltd., Fairacres, Marcham Road Abingdon, Oxon, OX14 1TW Professional Sales, Tel: 0845 365 6608 E-mail: professional@miele.co.uk Internet: www.miele.co.uk/professional

Australia

Miele Australia Pty. Ltd. ACN 005 635 398, ABN 96 005 635 398 Level 4, 141 Camberwell Road, Hawthorn East, VIC 3123 Tel: 1300 731 411 Internet: www.miele.com.au/professional E-mail: professional.sales@miele.com.au

China Mainland

Miele Electrical Appliances Co., Ltd. 1-3 Floor, No. 82 Shi Men Yi Road Jing' an District, 200040 Shanghai, PRC Tel: +86 21 6157 3500, Fax: +86 21 6157 3511 E-mail: info@miele.cn, Internet: www.miele.cn

Hong Kong, China

Miele (Hong Kong) Ltd. 41/F - 4101, Manhattan Place 23 Wang Tai Road, Kowloon Bay, Hong Kong Tel: (852) 2610 1025, Fax: (852) 3579 1404 Email: customerservices@miele.com.hk Website: www.miele.hk

India

Miele India Pvt. Ltd. 1st Floor, Copia Corporate Suites, Commercial Plot 9, Mathura Road, Jasola, New Delhi - 110025 E-mail: customercare@miele.in, Website: www.miele.in

Ireland

Miele Ireland Ltd. 2024 Bianconi Ave., Citywest Business Campus, Dublin 24 Tel: (01) 461 07 10, Fax: (01) 461 07 97 E-Mail: info@miele.ie, Internet: www.miele.ie



Manufacturer: Miele & Cie. KG Carl-Miele-Straße 29, 33332 Gütersloh, Germany Malaysia Miele Sdn Bhd Suite 12-2, Level 12 Menara Sapura Kencana Petroleum Solaris Dutamas No. 1, Jalan Dutamas 1 50480 Kuala Lumpur, Malaysia

Phone: +603-6209-0288

Fax: +603-6205-3768

New Zealand

Miele New Zealand Limited IRD 98 463 631 8 College Hill Freemans Bay, Auckland 1011, NZ Tel: 0800 464 353 Internet: www.miele.com.au/professional E-mail: professional.sales@miele.com.au

Singapore

Miele Pte. Ltd. 29 Media Circle, #11-04 ALICE@Mediapolis Singapore 138565 Tel: +65 6735 1191, Fax: +65 6735 1161 E-Mail: info@miele.com.sg Internet: www.miele.sg

South Africa

Miele (Pty) Ltd 63 Peter Place, Bryanston 2194 P.O. Box 69434, Bryanston 2021 Tel: (011) 875 9000, Fax: (011) 875 9035 E-mail: info@miele.co.za Internet: www.miele.co.za

United Arab Emirates


Miele Appliances Ltd. Showroom 1, Eiffel 1 Building Sheikh Zayed Road, Umm Al Sheif P.O. Box 114782 - Dubai Tel. +971 4 3044 999, Fax. +971 4 3418 852 800-MIELE (64353) E-Mail: info@miele.ae, Website: www.miele.ae


Key:


\bigcirc	Connection required	\bigcirc	Connection optional or required, depending on model
AL	Exhaust air	KLZ	Cooling air intake
ASK	Condensate drain hose	PA	Equipotential bonding
В	Appliance anchoring	SLA	Peak-load connection
EL	Electrical connection	APCL SST	Box plinth
F	Appliance feet, adjustable	APCL OB	Open plinth
KG	Payment system	APCL 001	Washer-dryer stacking kit
KGA	Payment system connection	XKM	Communication module
KLA	Cooling air vent	ZL	Air intake


Appliance dimensions

* The distances between the machine and the wall are recommendations to help make it easier to carry out service work. If installation space is limited, the machine can also be pushed up against the wall.

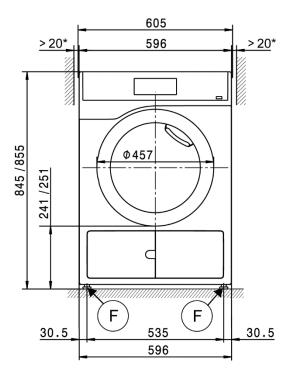

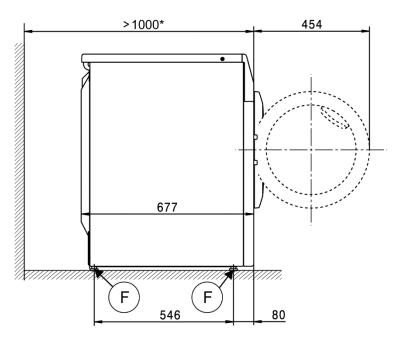


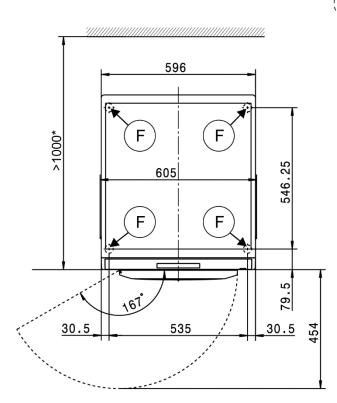


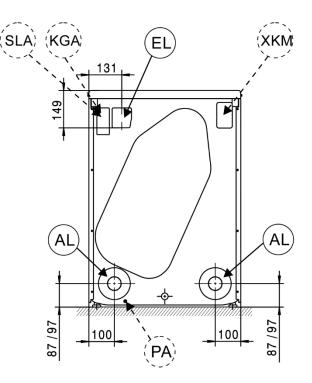



Installation

* The distances between the machine and the wall are recommendations to help make it easier to carry out service work. If installation space is limited, the machine can also be pushed up against the wall.

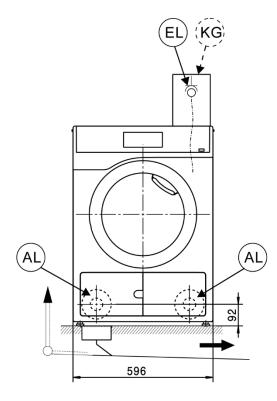

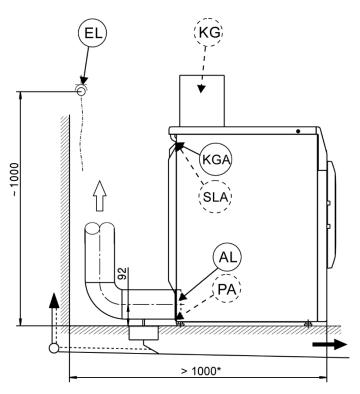

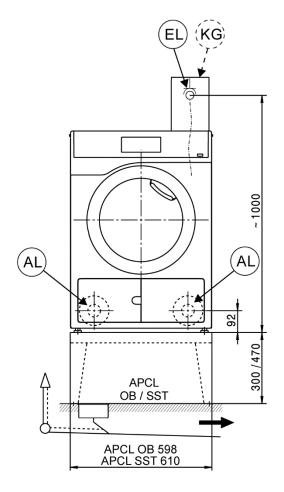

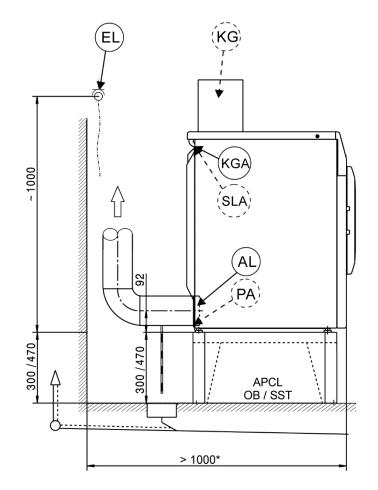

454

32

68.5


32

1702

454


Washer-dryer stack


* The distances between the machine and the wall are recommendations to help make it easier to carry out service work. If installation space is limited, the machine can also be pushed up against the wall.

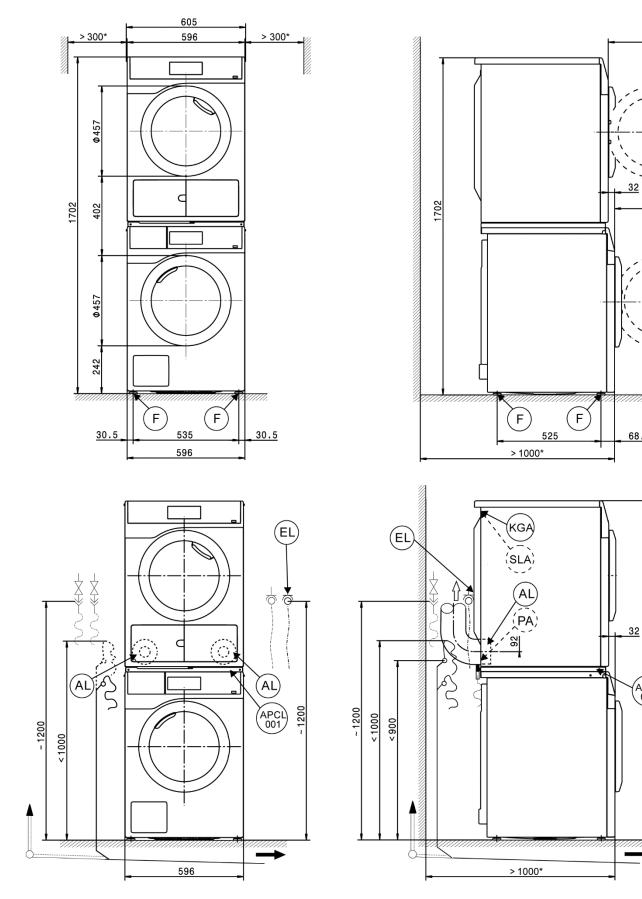



Installation

* The distances between the machine and the wall are recommendations to help make it easier to carry out service work. If installation space is limited, the machine can also be pushed up against the wall.

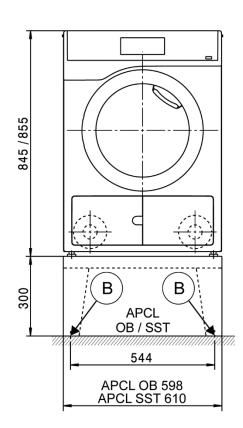

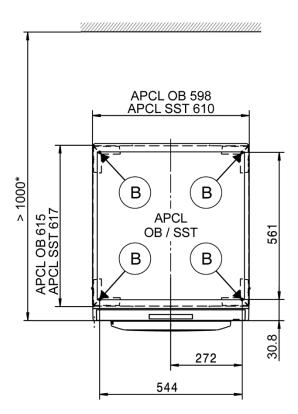

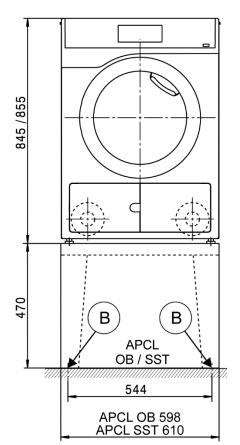

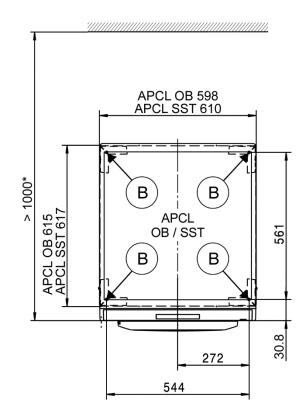

		PDR 507 EL
Drying system		Vented
		130
Load capacity	kg	7.0
Door opening diameter	mm	370
Electrical connection (EL)		
Standard voltage		3N AC 400 V
Frequency	Hz	50/60
Total rated load	kW	6.4
Fuse rating (B trip rating according to EN 60898)	Α	3 x 10
Supply lead min. cross-section	mm²	5 x 1.5
Supply lead without plug		•
ength of supply lead	mm	2000
Alternative voltage (convertible by Miele Customer Service Depart	ment)	1N AC 230 V
Frequency	Hz	50/60
Total rated load	kW	3.24
Fuse rating (B trip rating according to EN 60898)	А	1 x 16
Supply lead min. cross-section	mm²	3 x 1.5
Alternative voltage (convertible by Miele Customer Service Depart	ment)	3 AC 230 V
Frequency	Hz	50/60
Fotal rated load	kW	6.4
Fuse rating (B trip rating according to EN 60898)	A	3 x 16
Supply lead min. cross-section	mm²	4 x 1.5
	11111-	4 × 1.5
Non-standard voltages MAR 400/440/480 (Marine)		3 AC 400/440/480 V
Frequency	Hz	50/60
Fotal rated load	kW	4.5/5.4/6.4
Fuse rating (B trip rating according to EN 60898)	А	3 x 10
Supply lead min. cross-section	mm²	4 x 1.5
Supply lead without plug		
Length of supply lead	mm	2000
Variations in the following countries:		
Standard voltage 13 A (GB only)		3N AC 400 V
Frequency	Hz	50/60
Total rated load	kW	5.47
Fuse rating (B trip rating according to EN 60898)	A	3 x 13
Supply lead min. cross-section	mm²	5 x 1.5
		•
Supply lead without plug		-
Length of supply lead	mm	2000
Standard voltage 13 A (GB only)		1N AC 220–230 V
Frequency	Hz	50/60
Fotal rated load	kW	2.76–2.99
Fuse rating (B trip rating according to EN 60898)	А	1 x 13
Supply lead min. cross-section	mm²	3 x 1.5
Supply lead with plug		•
ength of supply lead	mm	2000
Standard voltage 25 A (GB only)		1N AC 220–230 V
Frequency	Hz	50/60
Fotal rated load	kW	5.03–5.47
Fuse rating (B trip rating according to EN 60898)	A	1 x 25
Supply lead min. cross-section	mm²	3 x 2.5
Supply lead without plug	111117	•
Length of supply lead		
	mm	2000

 \bullet = standard, O = optional, + = only on request, - not available

Technical data

Standard voltage (N only)		3 AC 230 V
requency	Hz	50/60
Total rated load	kW	6.4
Fuse rating (B trip rating according to EN 60898)	A	3 x 16
Supply lead min. cross-section	mm²	4 x 1.5
Supply lead without plug		•
Length of supply lead	mm	2000
		2000
Alternative voltage (convertible)		1N AC 230 V
Fotal rated load	kW	3.24
Fuse rating (B trip rating according to EN 60898)	A	1 x 16
Supply lead min. cross-section	mm²	3 x 1.5
		5 × 1.5
Alternative voltage (convertible)		3N AC 400 V
Frequency	Hz	50/60
Fotal rated load	kW	6.4
Fuse rating (B trip rating according to EN 60898) Supply lead min. cross-section	A	3 x 10
	mm²	5 x 1.5
Vented (EL)		
Connection (ext. diameter)	mm	100
Max. exhaust air temperature	°C	80
Electrical connection with 50 Hz/60 Hz		
Max. permissible pressure loss	Pa	340
Max. flow rate w/o counterpressure (0 Pa) in vented mode	m³/h	285
Equipotential bonding (PA)		
		0
Equipotential bonding (PA) Appliance connection (with installation kit) XCI-Box / XCI-AD interface		•
Appliance connection (with installation kit) XCI-Box / XCI-AD interface		
Appliance connection (with installation kit) XCI-Box / XCI-AD interface Peak load/energy management (SLA)		•
Appliance connection (with installation kit) XCI-Box / XCI-AD interface Peak load/energy management (SLA)		
Appliance connection (with installation kit) XCI-Box / XCI-AD interface Peak load/energy management (SLA) Appliance connection (with XCI-Box)		•
Appliance connection (with installation kit) XCI-Box / XCI-AD interface Peak load/energy management (SLA) Appliance connection (with XCI-Box)		•
Appliance connection (with installation kit) XCI-Box / XCI-AD interface Peak load/energy management (SLA) Appliance connection (with XCI-Box) Payment system connection (KGA)		•
Appliance connection (with installation kit) XCI-Box / XCI-AD interface Peak load/energy management (SLA) Appliance connection (with XCI-Box) Payment system connection (KGA) Connection of payment systems (with XCI-Box / XCI-AD)		•
Appliance connection (with installation kit) XCI-Box / XCI-AD interface Peak load/energy management (SLA) Appliance connection (with XCI-Box) Payment system connection (KGA) Connection of payment systems (with XCI-Box / XCI-AD)		•
Appliance connection (with installation kit) XCI-Box / XCI-AD interface Peak load/energy management (SLA) Appliance connection (with XCI-Box) Payment system connection (KGA) Connection of payment systems (with XCI-Box / XCI-AD) Communication module (XKM)		•
Appliance connection (with installation kit) KCI-Box / XCI-AD interface Peak load/energy management (SLA) Appliance connection (with XCI-Box) Payment system connection (KGA) Connection of payment systems (with XCI-Box / XCI-AD) Communication module (XKM) Communication module XKM 3200 WL PLT		• • •
Appliance connection (with installation kit) KCI-Box / XCI-AD interface Peak load/energy management (SLA) Appliance connection (with XCI-Box) Payment system connection (KGA) Connection of payment systems (with XCI-Box / XCI-AD) Communication module (XKM) Communication module XKM 3200 WL PLT nstallation on appliance feet (F)		• • • •
Appliance connection (with installation kit) KCI-Box / XCI-AD interface Peak load/energy management (SLA) Appliance connection (with XCI-Box) Payment system connection (KGA) Connection of payment systems (with XCI-Box / XCI-AD) Communication module (XKM) Communication module XKM 3200 WL PLT nstallation on appliance feet (F) No. of appliance feet	No.	• • •
Appliance connection (with installation kit) XCI-Box / XCI-AD interface Peak load/energy management (SLA) Appliance connection (with XCI-Box) Payment system connection (KGA) Connection of payment systems (with XCI-Box / XCI-AD) Communication module (XKM) Communication module XKM 3200 WL PLT No. of appliance feet	No. mm	• • • •
Appliance connection (with installation kit) XCI-Box / XCI-AD interface Peak load/energy management (SLA) Appliance connection (with XCI-Box) Payment system connection (KGA) Connection of payment systems (with XCI-Box / XCI-AD) Communication module (XKM) Communication module XKM 3200 WL PLT Installation on appliance feet (F) No. of appliance feet Appliance foot, height-adjustable with thread		• • • • • • • • • • • • • •
Appliance connection (with installation kit) XCI-Box / XCI-AD interface Peak load/energy management (SLA) Appliance connection (with XCI-Box) Payment system connection (KGA) Connection of payment systems (with XCI-Box / XCI-AD) Communication module (XKM) Communication module XKM 3200 WL PLT Installation on appliance feet (F) No. of appliance feet Appliance foot, height-adjustable with thread Appliance foot diameter	mm	• 0 0 0 0 4 ±5
Appliance connection (with installation kit) XCI-Box / XCI-AD interface Peak load/energy management (SLA) Appliance connection (with XCI-Box) Payment system connection (KGA) Connection of payment systems (with XCI-Box / XCI-AD) Communication module (XKM) Communication module XKM 3200 WL PLT Installation on appliance feet (F) No. of appliance feet Appliance foot, height-adjustable with thread Appliance foot diameter	mm	• 0 0 0 0 4 ±5
Appliance connection (with installation kit) XCI-Box / XCI-AD interface Peak load/energy management (SLA) Appliance connection (with XCI-Box) Payment system connection (KGA) Connection of payment systems (with XCI-Box / XCI-AD) Communication module (XKM) Communication module XKM 3200 WL PLT Installation on appliance feet (F) No. of appliance feet Appliance foot, height-adjustable with thread Appliance foot diameter Anchoring (B) Anchoring of Miele plinths	mm	• 0 0 4 ±5 31.7
Appliance connection (with installation kit) KCI-Box / XCI-AD interface Peak load/energy management (SLA) Appliance connection (with XCI-Box) Payment system connection (KGA) Connection of payment systems (with XCI-Box / XCI-AD) Communication module (XKM) Communication module XKM 3200 WL PLT No. of appliance feet Appliance foot, height-adjustable with thread Appliance foot diameter	mm	• 0 0 0 4 ±5 31.7 0
Appliance connection (with installation kit) KCI-Box / XCI-AD interface Peak load/energy management (SLA) Appliance connection (with XCI-Box) Payment system connection (KGA) Connection of payment systems (with XCI-Box / XCI-AD) Communication module (XKM) Communication module XKM 3200 WL PLT nstallation on appliance feet (F) No. of appliance feet Appliance foot, height-adjustable with thread Appliance foot diameter Anchoring (B) Anchoring of Miele plinths Miele plinth installation (fasteners included) Required anchor points	mm	• 0 0 4 ±5 31.7
Appliance connection (with installation kit) KCI-Box / XCI-AD interface Peak load/energy management (SLA) Appliance connection (with XCI-Box) Payment system connection (KGA) Connection of payment systems (with XCI-Box / XCI-AD) Communication module (XKM) Communication module XKM 3200 WL PLT nstallation on appliance feet (F) No. of appliance feet Appliance foot, height-adjustable with thread Appliance foot diameter Anchoring (B) Anchoring of Miele plinths Miele plinth installation (fasteners included) Required anchor points	mm	• 0 0 0 4 ±5 31.7 0
Appliance connection (with installation kit) KCI-Box / XCI-AD interface Peak load/energy management (SLA) Appliance connection (with XCI-Box) Payment system connection (KGA) Connection of payment systems (with XCI-Box / XCI-AD) Communication module (XKM) Communication module XKM 3200 WL PLT nstallation on appliance feet (F) No. of appliance feet Appliance foot, height-adjustable with thread Appliance foot diameter Anchoring (B) Anchoring of Miele plinths Miele plinth installation (fasteners included) Required anchor points Nood screws according to DIN 571	mm mm No.	• 0 0 4 ±5 31.7 0 4 4 ±5 31.7
Appliance connection (with installation kit) KCI-Box / XCI-AD interface Peak load/energy management (SLA) Appliance connection (with XCI-Box) Payment system connection (KGA) Connection of payment systems (with XCI-Box / XCI-AD) Communication module (XKM) Communication module (XKM) Communication on appliance feet (F) No. of appliance feet Appliance foot, height-adjustable with thread Appliance foot diameter Anchoring (B) Anchoring of Miele plinths Miele plinth installation (fasteners included) Required anchor points Nood screws according to DIN 571 Rawl plugs (diameter x length)	mm mm No. mm	• 0 0 4 ±5 31.7 0 0 4 ±5 31.7
Appliance connection (with installation kit) KCI-Box / XCI-AD interface Peak load/energy management (SLA) Appliance connection (with XCI-Box) Payment system connection (KGA) Connection of payment systems (with XCI-Box / XCI-AD) Communication module (XKM) Communication module (XKM) Communication on appliance feet (F) No. of appliance feet Appliance foot, height-adjustable with thread Appliance foot diameter Anchoring (B) Anchoring of Miele plinths Wiele plinth installation (fasteners included) Required anchor points Nood screws according to DIN 571 Rawl plugs (diameter x length)	mm mm No. mm	• • <td< td=""></td<>
Appliance connection (with installation kit) XCI-Box / XCI-AD interface Peak load/energy management (SLA) Appliance connection (with XCI-Box) Payment system connection (KGA) Connection of payment systems (with XCI-Box / XCI-AD) Communication module (XKM) Communication module XKM 3200 WL PLT Installation on appliance feet (F) No. of appliance feet Appliance foot, height-adjustable with thread Appliance foot diameter Anchoring (B) Anchoring of Miele plinths Wiele plinth installation (fasteners included) Required anchor points Nood screws according to DIN 571 Rawl plugs (diameter x length) Plinth floor anchoring (to be provided on site) Appliance installation on on-site plinth (concrete or masonry)	mm mm No. mm	• • <td< td=""></td<>
Appliance connection (with installation kit) XCI-Box / XCI-AD interface Peak load/energy management (SLA) Appliance connection (with XCI-Box) Payment system connection (KGA) Connection of payment systems (with XCI-Box / XCI-AD) Communication module (XKM) Communication module XKM 3200 WL PLT Installation on appliance feet (F) No. of appliance feet Appliance foot, height-adjustable with thread Appliance foot diameter Anchoring (B) Anchoring of Miele plinths Miele plinth installation (fasteners included) Required anchor points Wood screws according to DIN 571 Rawl plugs (diameter x length) Plinth floor anchoring (to be provided on site) Appliance installation on on-site plinth (concrete or masonry) Min. plinth installation footprint (W/D)	mm mm No. mm	• • <td< td=""></td<>
Appliance connection (with installation kit) XCI-Box / XCI-AD interface Peak load/energy management (SLA) Appliance connection (with XCI-Box) Payment system connection (KGA) Connection of payment systems (with XCI-Box / XCI-AD) Communication module (XKM) Communication module XKM 3200 WL PLT Installation on appliance feet (F) No. of appliance feet Appliance foot, height-adjustable with thread Appliance foot diameter Anchoring (B) Anchoring of Miele plinths Miele plinth installation (fasteners included) Required anchor points Wood screws according to DIN 571 Rawl plugs (diameter x length) Plinth floor anchoring (to be provided on site) Appliance installation on on-site plinth (concrete or masonry)	mm mm No. mm mm	• • <td< td=""></td<>

 \bullet = standard, O = optional, + = only on request, - not available

nalianaa data		PDR 507 EL
ppliance data		
verall appliance dimensions (H/W/D)	mm	850/605/717
asing dimensions (H/W/D)	mm	850/596/677
te-access dimensions (H/W)		
in. site-access opening (excl. packaging)	mm	900/605
stallation dimensions		
de gap	mm	20
ecommended side gap – washer-dryer stack	mm	300
ecommended distance to opposite wall from appliance front	mm	1000
eights and floor loads		
ppliance weight (net weight)	kg	50
ax. floor load in operation	N	670
		-70
und pressure level (in accordance with EN ISO 11204/11203) at dissipation rate to installation site	dB(A) W	<70 200
את שושויף המוכיני וואומוומווטון אונכ	vV	200

Installation and planning notes

Installation requirements

The tumble dryer should only be connected to a power supply provided in accordance with all appropriate local and national legislation and regulations.

In addition, all regulations issued by the appropriate utilities as well as standards relating to occupational safety and all applicable valid regulations and technical standards must be observed.

General operating conditions

Ambient temperature in installation room: +2 °C to +35 °C.

Electrical connection

Depending on the model, the tumble dryer is delivered with a supply lead with/without a plug.

The appliance may only be connected to an electrical system that conforms to the national and local codes and regulations (BS 7671 in the UK). The installation must be performed by a qualified electrician.

The data plate indicates the nominal power consumption and the appropriate fuse rating. Compare the specifications on the data plate with those of the electrical power supply.

It is always recommended to connect the appliance via a plug and socket so that electrical safety checks, e.g. during repair or service work, can be carried out easily.

The appliance can either be hard-wired or connected using a plugand-socket connection in accordance with IEC 60309-1. If the appliance is hard-wired, a dual circuit breaker must be provided on site. When switched off there must be an all-pole contact gap of at least 3 mm in the isolator switch (including circuit breakers, fuses and contactors according to IEC/EN 60947).

The plug connector or isolator switch should be easily accessible at all times. If the appliance is disconnected from the electricity supply, the isolator must be lockable or the point of disconnection must be monitored at all times.

The tumble dryer should never be connected by an extension cable, e.g. power strips, to avoid the risk of fire.

New connections, modifications to the system or servicing of the earthing conductor, including determining the correct fuse amperage, must be carried out by a qualified electrician, as they are familiar with the pertinent regulations and the specific requirements of the electric utility company.

If converting the tumble dryer to an alternative voltage, observe the instructions in the wiring diagram. Conversion must be performed by the Miele Customer Service Department or by an authorised Miele dealer. The heater rating must also be adapted.

The appliance must not be connected to devices such as timers which would switch it off automatically.

References to cable cross-sections in the technical data refer only to the required mains cable. Please consult relevant local and national regulations when calculating any other wire gauges.

Vent connection

Hot moist exhaust air should be vented to atmosphere along the shortest possible route or connected to a suitable vent system.

Depending on the duct path, the moist exhaust air can condense on the duct walls to a greater or lesser extent. For this reason it is recommended to lay ducting with a downwards slope to the air exit.

If ducting slopes upwards, a condensate trap either with a drip tray or a connection to a suitable on-site floor drain must be fitted in the system at the lowest point.

Condensate must not flow back into the appliance.

It is permissible to vent exhaust air via an external wall. In this case, measures must be taken to minimise the risk and annoyance to neighbouring buildings.

The end of exhaust air ducting leading into the open should be protected against the elements, e.g. using a suitable hood or with a 90° bend.

The cross-sectional area of the ducting must not be reduced or obstructed by built-in parts. Filters and louvres must not be fitted in the ducting.

Congestion in the line may lead to a drop in appliance performance or to appliances being switched off to guarantee safety.

Proper functioning of the tumble dryer cannot be guaranteed if the max. permissible pressure loss is exceeded in the on-site vent ducting system.

When connecting several tumble dryers to a common duct, the crosssectional area of the duct must be increased accordingly.

Additionally, in such a case every tumble dryer must have its own non-return valve to prevent dryers affecting others in the system. This requires the provision of on-site additional parts.

In the event that exhaust air ducts from several tumble dryers are merged into a common duct, a non-return device should be installed in each separate line to prevent backflow.

With complex ducting with many bends and additional components, or with the connection of several different tumble dryers to a common duct, it is recommended that a detailed calculation is carried out by a suitable specialist.

Air intake

The air supply for the tumble dryer is taken directly from the installation site.

During operation, adequate ventilation of the installation site should be guaranteed. Depending on the appliance version, it is necessary to ensure an intake of fresh air to compensate for the volume of exhaust air extracted in order to avoid the creation of a vacuum.

It should not be possible to close or otherwise obstruct air intake grilles or alternative measures should be implemented to ensure that an adequate supply of fresh air is available at all times during appliance operation.

Equipotential bonding

If necessary, equipotential bonding with good galvanic contact must be guaranteed in compliance with all applicable local and national installation specifications.

Connection material for equipotential bonding must be provided on site or using a kit available from the Miele Customer Service Department.

Peak load/energy management

The appliance can be connected to a peak-load or energy management system using an optional kit.

When the peak-load function is activated, the heating is deactivated. A message appears in the display to inform you of this.

Payment system

The tumble dryer can be fitted with a single-machine payment system as an optional accessory using an optional kit (XCI-Box / XCI-AD).

The programming required for connecting a payment system can be carried out during the initial commissioning process. After initial commissioning, changes may only be carried out by your Miele dealer or the Miele Customer Service Department.

Interface

The appliance can be fitted with an XKM 3200 WL PLT communication module.

This module can be used as a WiFi or LAN interface.

The LAN interface provided via the module complies with SELV (Safety Extra Low Voltage) in accordance with EN 60950. Connected appliances must also comply with SELV. The LAN connection uses a RJ45 connector in accordance with EIA/TIA 568-B.

Installation and anchoring

The appliance must be installed on a perfectly smooth, level and firm surface which is able to withstand the quoted loads.

The floor load created by the appliance is concentrated and transferred to the installation footprint via the appliance feet.

The appliance should be levelled in both directions with the aid of the adjustable feet.

Plinth installation

The tumble dryer can be installed on a plinth (open or box plinth, available as an optional Miele accessory) or on a concrete plinth to be provided on site.

The quality of the concrete and its strength must be assessed according to the appliance load. Ensure that any raised concrete plinth is adequately bonded to the floor below.

Washer-dryer stack

The tumble dryer can be installed as a washer-dryer stack together with a Miele washing machine. A stacking kit (optional accessory) is required for this.

Installation of the stacking kit must be performed by the Miele Customer Service Department or an authorised Miele service technician.

Installing the washer-dryer stack on a Miele plinth is not permitted.