### Míele





## PW 6241 55 lbs.

#### **Features**

- Profitronic M: Freely programmable controls
- Short program cycles
- Patented Honeycomb Drum
- Electronic imbalance monitoring
- G-force of 541
- High durability: tested for 30,000 operating hours
- Safe disinfection
- Low consumption values



#### **Patented Honeycomb Drum**

The sculptured structure of the Miele Honeycomb Drum allows garments to glide gently on a thin film of water.



#### **Short Program Cycles**

Premium commercial technology allows you to benefit from quick and efficient program cycles.



#### **Patented Pre-Spin**

The patented pre-spin removes excess water from cleaning cloths as soon as the program starts and reduces soiling.



#### Safe Disinfection


Ensure reliable levels of hygiene, with special programs for thermal and chemothermal disinfection.\*


\*May not apply for No Heater version.


Model	Heat Type	Electrical Specification Voltage/Hz/Phase (Amp)	Color	Material No.	Article No.
PW 6241	No Heater	240/60/1 (2 x 30 A)	Iron Grey	12092200	51624179NAM
PW 6241	No Heater	240/60/1 (2 x 30 A)	Stainless Steel	12092190	51624159NAM
PW 6241	Steam	240/60/1 (2 x 30 A)	Iron Grey	12092220	51624189NAM
PW 6241	Steam	240/60/1 (2 x 30 A)	Stainless Steel	12092210	51624149NAM
PW 6241	Steam	208, 240/60/3 (3 x 20 A)	Stainless Steel	12088640	51624187NAM
PW 6241	Electric	208, 240/60/3 (3 x 70 A)	Iron Grey	12092180	51624167NAM
PW 6241	Electric	208, 240/60/3 (3 x 70 A)	Stainless Steel	12088670	51624107NAM
PW 6241	Electric	440, 480/60/3 (3 x 35 A)	Stainless Steel	12092170	51624106NAM

# Míele

Specifications			
Capacity	55 lbs. (24.5 kg)		
Cylinder Diameter	16 <sup>15/16</sup> in. (800 mm)		
Cylinder Depth	18 <sup>7/8</sup> in. (479 mm)		
Cylinder Volume	8.5 cu.ft. (240 I)		
Machine Dimensions (WxDxH)	$42^{7/8} \times 51^{9/16} \times 64^{13/16}$ in.		
	(1,089 x 1,309 x 1,646 mm)		
Door Opening	16 <sup>15/16</sup> in. (430 mm)		
Floor to Door	25 <sup>15/16</sup> in. (658 mm)		
Reversible Door	No		
Shipping Dimensions (WxDxH)	$49^{11/16} \times 51^{15/16} \times 67^{5/16}$ in.		
	(1,262 x 1,472 x 1,710 mm)		
Net Weight	1,517 lbs. (688 kg)		
Crated Weight	1,630 lbs. (739 kg)		
Wash Speed	38 rpm		
Extract Speed	1,100 rpm		
G-force	541		
Water Inlets	7-8 x ¾ in. (178-203 x 19 mm)		
Hot Water (No Heater version)	1 x 1 in. (26 x 26 mm)		
Steam Inlets (Steam version)	2 x ½ in. (51 x 13 mm)		
Drain Diameter	2 <sup>3/4</sup> in. (70 mm)		
Recommended Water Pressure	14.5 -145 psi		
Water Flow	52.8 gal/min. (200 l /min.)		
Min. Recommended Distance Between Machines	2 in. (50 mm)		
Agency Approvals	Intertek		



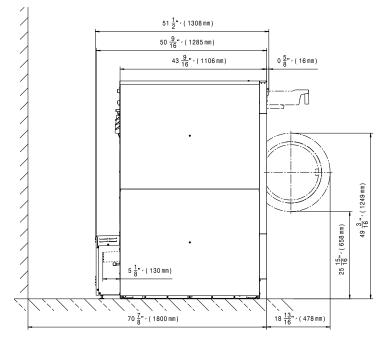

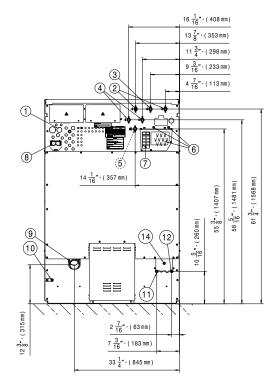

Heating	Voltage (Voltage/Hz/Phase)	Wire	Circuit Breaker Amps	Running Amps	Total Power (kW)
No Heater	240/60/1	2 Wire + Ground	30	27	4.4
Steam	240/60/1	2 Wire + Ground	30	27	4.4
Steam	208, 240/60/3	3 Wire + Ground	20	11	4.4
Electric	208, 240/60/3	3 Wire + Ground	70	63	26.2
Electric	440, 480/60/3	3 Wire + Ground	35	30.4	25.3

Specifications subject to change without notice or obligation. Contact Miele USA at (800) 991-9380 or Miele Canada at (888) 325-3957 for dimensions not shown or for clarification.