

# Operating and Installation Instructions Built-in Coffee System



To prevent accidents and machine damage, you **must** read these instructions before installation or use.

MPORTANT SAFETY INSTRUCTIONS				
Preparing your appliance for an extended vacation	10			
Guide to the appliance	14			
Front view	14 15 16			
Interior view				
The milk flask				
Central spout with cup rim sensor	16			
Controls and indicators	17			
Symbols in the display	18			
Drink button symbols	19			
Operation	20			
Selecting a menu and navigating within a menu	20			
	00			
Before first use	22			
Miele@home	22			
Before using for the first time	23 23			
Turning on for the first time				
Filling the coffee bean container	25			
Filling the water tank	26			
Switching on and off	27			
Switching the coffee machine on	27			
Switching the coffee machine off	27			
Preparing for an extended period of inactivity	27			
Preparing beverages	28			
Coffee	28			
Coffee drinks in detail	28			
The milk	28			
Filling and inserting the milk flask	29			
Making a coffee drink	30			
Canceling a drink	30			
DoubleShot	30			
Making 2 portions ☐	30			
Coffee pot	31			
Tea	31			
Making tea	32			
Starting the TeaTimer manually	32			
Tea pot	32			
Dispensing warm or hot water	33			
Expert Mode	34			
Switching Expert mode on and off	34			

Expert mode: changing the portion size	34
Grinder setting	<b>35</b> 35
Parameters  Amount of coffee  Pre-brewing ground coffee  Brewing temperature for coffee drinks  Dispensing temperature for tea drinks  Portion size  Displaying and changing parameters  Changing the portion size	36 36 36 36 36 37 37
Profiles Profiles Creating a profile Changing drinks within a profile Making drinks stored in a profile Editing profiles Setting when the profile should change Changing the profile name Deleting the profile	38 38 38 38 38 38 39 39
MobileStart	40
Settings Displaying and changing Settings Language Time Date Timer On at Off at Off after	41 41 41 41 41 41 42 42
TeaTimer Volume Display brightness Lighting Info (display information)	42 42 42 42 42
Altitude	43

Performance Mode	43
Eco Mode	43
Barista Mode	43
Latte Mode	43
Party Mode	43
Water hardness	43
System lock 🔂	44
Miele@home	45
Remote control	45
RemoteUpdate	45
Software version	46
Showroom program (Demo mode)	46
Factory default settings	46
Cleaning and care	47
Overview of cleaning intervals	47
Clean by hand or in dishwasher	48
Unsuitable cleaning agents	48
Cleaning the drip tray and grounds container	49
Cleaning the drip tray cover	51
Cleaning the water container	51
Cleaning the central spout	52
Cleaning the cup rim sensor	54
Cleaning the milk flask with lid	55
Cleaning the milk valve (daily)	55
Cleaning the milk valve (once a month)	56
Cleaning the bean containers	59
Cleaning the interior, inside of the appliance door, and drip tray	60
Cleaning the appliance front	60
Maintenance programs	61
Opening the Maintenance menu	61
Rinse appliance	61
Rinse milk pipework	61
Cleaning the milk pipework	61
Degreasing the brew unit and cleaning the interior	62
Descaling the appliance	64
Frequently asked questions	66
Messages in the display	66
Unusual performance of the coffee system	68
Unsatisfactory results	71
Service and warranty  Contact in the event of a fault	<b>73</b>
Appliance warranty and product registration	
Appliance warranty and product registration	73

Accessories	74		
Caring for the environment			
Installation	76		
Electrical connection	76		
Installation dimensions	77		
Building in the coffee machine	79		

This coffee machine complies with all the stipulated safety requirements. Inappropriate use can, however, lead to personal injury and material damage.

Read the operating instructions carefully before using the coffee machine. They contain important information on safety, installation, use, and maintenance. This prevents both personal injury and damage to the coffee machine.

Miele expressly and strongly advises you to read and follow the instructions in the chapter on installing the coffee machine as well as the safety instructions and warnings.

Miele cannot be held liable for injury or damage caused by non-compliance with these instructions.

Keep these operating instructions in a safe place and pass them on to any future owner.

## Appropriate use

- This coffee machine is intended for household use.
- Do not use the coffee machine outdoors.
- ▶ This coffee machine must not be used at altitudes above 6560 ft (2000 m).
- Persons who lack physical, sensory or mental abilities or experience with the machine should not use it without supervision or instruction by a responsible person.

## Safety with children

Danger of burning and scalding at the dispensers.

Children's skin is far more sensitive to high temperatures than that of adults.

Ensure children do not touch hot surfaces of the coffee machine or place parts of their body under the dispensers.

- ► Keep the coffee system out of reach of children.
- ▶ Children must be kept away from the coffee machine unless they are constantly supervised.
- ► Children must be aware of the potential dangers caused by incorrect operation.
- ▶ Children should be supervised when they are near the coffee system. Do not allow them to play with it or to use the controls.
- ▶ Remember that coffee and espresso are not suitable drinks for children.
- ▶ Danger of suffocation. While playing, children may become entangled in packaging material (such as plastic wrapping) or pull the packaging material over their head, presenting the risk of suffocation. Keep packaging material away from children.

## **Technical safety**

- Installation work or repairs should only be carried out by a Miele authorized technician. Unauthorized or incorrect installation work or repairs can pose considerable danger to users.
- A damaged coffee system could be dangerous. Before building in the machine, check it for any externally visible damage. Do not use a damaged machine.
- ▶ Before connecting the coffee system, check the voltage and frequency indicated on the data plate against the voltage and frequency of the household electrical supply.

This data must correspond in order to prevent damage to the coffee system. If in doubt, consult a qualified electrician.

- ▶ Be certain your appliance is properly installed and grounded by a qualified technician. To guarantee the electrical safety of this appliance, continuity must exist between the appliance and an effective grounding system. It is imperative that this basic safety requirement be met. If there is any doubt, have the electrical system of the house checked by a qualified electrician.
- ▶ Reliable and safe operation of the coffee system can only be guaranteed if it is connected to the electrical supply.
- ▶ Do not connect the machine to the electrical supply using an extension cord or power bar.
- ▶ The coffee machine may not be used in mobile installations such as ships.
- For safety reasons, this machine may only be used when it has been built in.
- ▶ Unplug the coffee machine from the power supply immediately if you notice any damage or smell burning.
- ► Ensure that the power cord will not be pinched or damaged by any sharp edges.
- ➤ To reduce the risk of injury, do not drape cord over the counter top or table top where it can be pulled on by children or tripped over unintentionally.
- Do not operate any appliance with a damaged cord or plug or after the appliance malfunctions, or has been damaged in any manner. Return appliance to the nearest authorized service facility for examination, repair or adjustment.

- To protect against fire, electric shock and injury to persons do not immerse cord or plugs in water or other liquid.
- To reduce the risk of fire:
- Do not place any heating or cooking appliance beneath the appliance without a shelf in between.
- Do not mount unit over or near any portion of a heating or cooking appliance without a shelf in between.
- Do not mount over a sink.
- Do not store anything directly on top of the appliance surface when the appliance is in operation.
- ▶ If the coffee machine is to be built in above another appliance, there must be a full-width, closed shelf between them (except when it is combined with a Gourmet warming drawer or a built-in vacuum drawer).
- Do not place on or near a hot gas or electric burner, or in a heated oven.
- ▶ Only use the coffee system in rooms where the ambient temperature is between +60°F (16°C) and +100°F (38°C).
- ► For repairs, the coffee system must be disconnected from the electrical power supply.

The coffee system is only disconnected from the power supply if

- the circuit breaker has been tripped, or
- the fuse is removed, or
- the power cord is disconnected from the power supply.
   Pull the plug, not the cord, to disconnect the appliance from the power supply.
- ► The manufacturer's warranty may be invalidated if the appliance is not repaired by a Miele approved service technician from Technical Service.
- Never open the outer casing of the machine. Tampering with electrical connections or components and mechanical parts is highly dangerous to the user and can cause operational faults or electric shock.

#### Correct use

- ▶ Please note the following regarding water:
- The water quality must conform to the requirements for drinking water in the country in which the coffee machine is being used.
- Only use cold, fresh tap water to fill the water container. Hot or warm water or other liquids can damage the coffee machine.
- Change the water every day to prevent a build-up of bacteria.
- Do not use sparkling water.
- ▶ Only put roasted coffee beans in the bean containers. Do not place coffee beans which have been treated with additives or ground coffee inside the bean containers.
- ▶ Do not fill the bean containers with any type of liquid.
- ▶ Do not use green (unroasted) coffee beans or mixtures of coffee beans which contain green coffee beans. Green coffee beans are very hard and still contain residual moisture. These can damage the coffee machine grinder as soon as grinding begins.
- ▶ Do not use oily beans or beans that have been treated with caramel, sugar, or other substances. Sugar and oil will damage the coffee system.
- ▶ Only use plain milk. Most sugary additives can clog the milk lines and damage the machine.
- If using dairy milk make sure that it has been pasteurized.
- ▶ When making tea, please follow the instructions on the tea packaging.
- ▶ Do not place flaming alcohol mixtures underneath the central spout. The flames could ignite plastic components and cause them to melt.
- ▶ Do not swing from or hang anything on the machine front when it is open as this could damage the hinges of the machine.
- Do not use the coffee system to clean objects.

#### Preparing your appliance for an extended vacation

▶ If you elect to turn off the water to your home for an extended period of time, please note that this may not be enough to reduce the risk of a leak. To be completely safe, you must turn off the water supply to each individual appliance. This means under the sink for a dishwasher, at the laundry bib for your washer, etc.

## **Accessories and parts**

- ▶ Only use genuine Miele accessories. If other parts are used, warranty, performance, and/or product liability claims may be invalidated.
- ▶ The use of accessory attachments not recommended by the appliance manufacturer may result in fire, electric shock or injury to persons.
- ▶ Miele can only guarantee the safety of the appliance when genuine Miele replacement parts are used. Faulty components should only be replaced by genuine Miele replacement parts.

## Cleaning and maintenance

- ▶ Unplug from outlet when not in use and before cleaning. Allow to cool before putting on or taking off parts, and before cleaning the appliance.
- ► Clean the coffee machine and the milk flask daily, particularly before using for the first time.
- ▶ All parts of the milk system need to be cleaned thoroughly and regularly.
- Degrease the brew unit regularly with Miele cleaning tablets. Depending on the natural oil content of the coffee used, the brew unit can become blocked quite quickly.
- ▶ Do not use a steam cleaner to clean this machine. Steam could reach electrical components and cause a short circuit.
- ▶ Rinsing coffee grounds down the drain can cause the sink to clog. Instead, dispose of your coffee grounds appropriately as biodegradable waste (where facilities exist) or by composting.


#### For machines with stainless steel surfaces:

- Do not use sticky notes, transparent adhesive tape, masking tape, or other types of adhesive on the stainless steel surfaces. These will damage the stainless steel surfaces, causing them to lose their dirtrepellent protective coating.
- ► The finish on stainless steel surfaces is susceptible to scratching. Even magnets can cause scratching.

## SAVE THESE INSTRUCTIONS

# Guide to the appliance


#### Front view

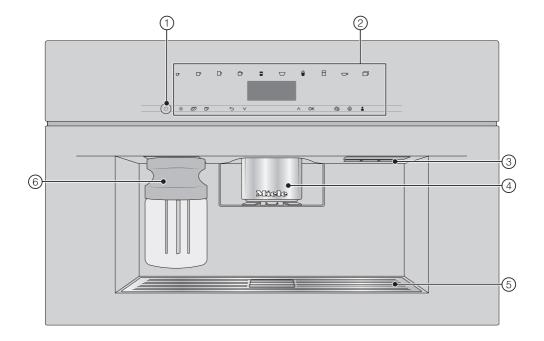

- ① On/Off button ①
- ② Control panel
- 3 Door handle
- 4 Height-adjustable central spout with lighting
- ⑤ Drip-tray cover
- 6 Milk container

# Guide to the appliance


#### Interior view

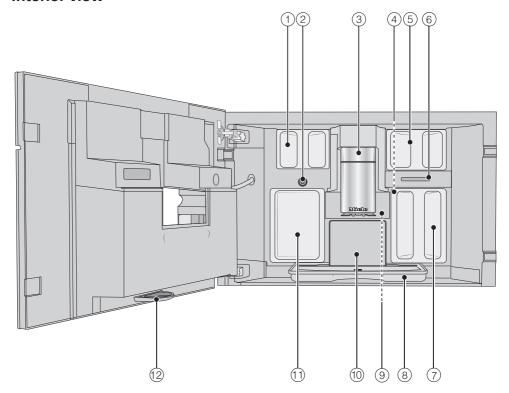

- 1 Bean container
- <sup>2</sup> Milk valve
- 3 Height-adjustable central spout with lighting
- 4 Grinder setting
- § Bean container
- 6 Fan outlet
- Water container
- 8 Drip tray with lid
- 9 Brew unit
- 10 Grounds container
- 11 Maintenance container
- 12 Drip tray

# Guide to the appliance

#### The milk flask



- 1 Lid
- <sup>(2)</sup> Milk intake tube
- (3) Sensor rod
- (4) Glass flask

# Central spout with cup rim sensor

The central spout with cup rim sensor features automatic spout adjustment. Thanks to this spout adjustment function, the central spout moves down automatically at the start of a drink preparation process and the cup rim sensor stops it at the optimum height for the cups or glasses being used.


The central spout and cup rim sensor **cannot** be manually adjusted.

When the coffee machine is switched off, the central spout will be in the middle position.

When a maintenance program is being carried out, the central spout will move to the height of the maintenance container or into a low maintenance position.

Make sure that the main position is in the top or middle position before you open the door.

#### **Controls and indicators**

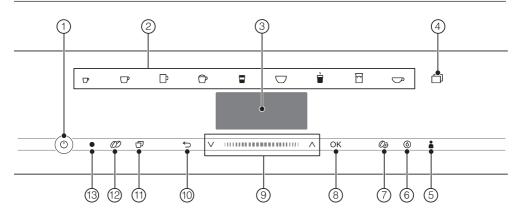

- ① **On/Off button** ①
  For switching coffee machine on and off
- 2 **Drink buttons**For making drinks
- Display
   For showing information about the current action or status
- 4 T sensor button
  - For making other drinks, e.g., Ristretto, Capuccino italiano
  - For making a pot of tea or coffee
  - Settings 🟲 menu
- ⑤ Profiles sensor button
  For creating and managing profiles
- 6 Maintenance  **sensor button**Maintenance programs, e.g., Descale
- Parameters sensor button
   For displaying or changing drink settings

#### (8) OK sensor button

For confirming display messages and saving settings

- Navigation area with arrow buttons AV
   For scrolling through lists, selecting entries, or changing values
- "Back" 

  sensor button

  For returning to the previous menu and canceling unwanted actions

  "Back"

  sensor button

  "Back"

  "Sensor button

  "Back"

  "Bac
- (2) "DoubleShot" (2) sensor buttons For making a particularly strong and aromatic coffee by using twice as much ground coffee but the same amount of water
- (3) Optical interface (for Miele Technical Service only)

# **Controls and indicators**

# Symbols in the display

The following symbols may also appear in the display in addition to the text:

Symbol	Explanation
-	This symbol indicates the Settings menu and the Language menu option.
i	This symbol indicates that there is additional information and advice about using the coffee machine. Select <i>OK</i> to confirm the information.
lacktriangle	This symbol appears if the system lock is activated. Operation is locked.
<b>₩</b>	The symbol and the desired switching-on time appear in the display 23:59 hours before the coffee machine is due to switch on if the Turn on at timer and setting for displaying the time are activated (see "Settings – Timer").
Φ	The TeaTimer kitchen timer has been started (see "TeaTimer" in the "Tea" chapter). The remaining brewing time is shown next to the symbol.
Ş	This symbol appears while the appliance is being descaled. (This symbol can also be found on the water container: fill up to this mark).
্থি	If Miele@home has been activated for the coffee machine, these symbols represent the quality of the Wi-Fi connection. They indicate the strength of the W-iFi connection in increments from strong to not connected.
· *	

# **Controls and indicators**

# **Drink button symbols**

- □ Espresso
- □ Coffee
- □ Long coffee
- Latte macchiato

- Milk froth
- Tea water

# **Operation**

#### Sensor controls

To operate the coffee machine, tap the sensor controls with your finger.

An audible signal is generated each time a sensor control is tapped. You can adjust the volume of the signal tones or switch the tones off (see "Customizing settings — Volume").

#### Drinks menu


When the following appears in the display, you are in the drinks menu: Select drink.



You can find more drinks in the Additional menu ( sensor button).

#### **Navigation area**

To select a menu option, keep pressing the arrow buttons  $\land$  and  $\lor$  until the option you want is highlighted.

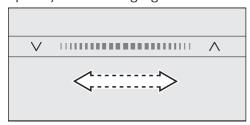

To scroll more quickly through the options, swipe your finger right or left in the area between the arrows.

As soon as you reach a confirmable value, message, or setting, the *OK* sensor button will light up orange.

Tap *OK* to confirm your selection.

# Selecting a menu and navigating within a menu

To select a menu, tap the relevant sensor control, e.g., the  $\Box$  sensor control.



You will then be able to start an action or change settings in the menu. A scroll bar at the right of the display shows that additional options or text are available.

The setting which is currently selected in a list will have a checkmark ✓ beside it.

# Exiting a menu or canceling an action


To exit the current menu, tap the *S* sensor button.

Alternatively, tap the lit orange sensor button again to return to the drinks menu.

#### **Entering a name**

Letters and numbers are entered via the navigation area. You can choose between upper and lower case letters.

Tip: It is best to select short names.

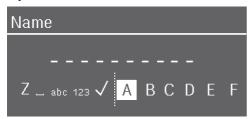

- To enter a character, highlight the one you want and confirm your choice with *OK*.
- To save the name, select the checkmark ✓ and confirm with *OK*.

#### Before first use

#### Miele@home

Your coffee machine is equipped with an integrated Wi-Fi module.

Before installing the coffee machine at its installation site, ensure that the signal from your Wi-Fi network is strong enough.

To use this feature, you will need:

- a Wi-Fi network
- the Miele app
- a Miele user account (this can be created from the Miele app)

The Miele app will guide you through the process of connecting your coffee machine to your home Wi-Fi network.

Once your coffee machine is connected to your Wi-Fi network, you can use the app to carry out activities such as the following:

- calling up information on the operating status of your coffee machine
- changing settings on your coffee machine
- controlling your coffee machine remotely

Connecting your coffee machine to your Wi-Fi network will increase energy consumption, even when the machine is switched off.

#### Availability of the Wi-Fi connection

The Wi-Fi connection shares a frequency range with other appliances (including microwave ovens and remote control toys). This can cause sporadic or even complete connection failures. Therefore, the availability of featured functions cannot be guaranteed.

#### Miele@home availability

The ability to use the Miele app depends on the availability of the Miele@home service in your country.

The Miele@home service is not available in every country.

For information about availability, please visit www.miele.com.

#### Miele App

The Miele App is available to download free of charge from the Apple App Store® or from the Google Play Store™.







#### Before using for the first time

- Connect the coffee machine to the electricity supply.
- Install the coffee machine.
- Remove any notices from the machine.
- Remove the protective foil from the drip-tray cover.
- Clean the water container, bean containers, and the central spout.
- Remove the water container and fill it with fresh, cold tap water. Only fill the water container up to the "max." mark and then reinsert it in the machine (see "Filling the water container").
- Remove the bean containers and fill them with roasted coffee beans.

#### Turning on for the first time

■ Tap the On/Off button ①.

#### Selecting the display language

■ Select the desired display language.

You might also be asked for your location.

The choice of location determines how the time of day is displayed, e.g., in the 12 or 24-hour format, as well as how units are displayed and so on.

#### Setting up the network (Miele@home)

You can connect your coffee machine to your Wi-Fi network.

The following appears in the display during commissioning: Set up "Miele@home"

**Tip:** You can also choose to set up Miele@home for your coffee machine at a later point. In this case, select Skip.

- Make sure that your Wi-Fi network signal is sufficiently strong in the coffee machine's installation site.
- Tap Continue.
- Select the connection method you wish to use.
- Follow the instructions provided in the coffee machine display and in the Miele app.

Connection successfully established appears in the display.

■ Touch *OK* to proceed with commissioning.

#### Setting the date

- Set today's date.
- Confirm with OK.

#### Setting the time of day

- Set the current time of day.
- Confirm with OK.

If the coffee machine has been connected to a Wi-Fi network and signed into the Miele app, the time will be synchronized based on the location setting in the Miele app.

#### Setting the water hardness

Your local water authority will be able to tell you the hardness of the water in your area.

More information can be found under "Settings – Water hardness".

Enter your local water hardness (in °dH) and confirm with OK.

#### Before first use

#### **Selecting the Performance Mode**

You can select the appropriate Performance mode to suit your personal preferences (see "Customizing settings — Performance mode").

- **Eco Mode**: This is an energy-saving mode
- Barista Mode: This mode has been optimized for unadulterated coffee enjoyment.
- Latte Mode: In this mode, milk-based drinks can be prepared within a much shorter space of time.
- Select the Performance mode you want.
- Confirm with OK.

Your machine has been successfully set up and is ready for use.

To ensure that any coffee residues from the factory testing process are removed from the brewing system, please throw away the first 2 cups of coffee when using the coffee machine for the first time.

# Filling the coffee bean container

Risk of damage to the grinder due to incorrect operation.


The coffee machine will be damaged if the bean container is filled with unsuitable substances such as liquids, ground coffee, or coffee beans treated with sugar, caramel, or similar.

In addition, green (unroasted) coffee beans or mixtures of coffee beans which contain green coffee beans can damage the grinder. Green coffee beans are very hard and still contain residual moisture. These can damage the coffee machine grinder as soon as grinding begins.


Only put roasted coffee beans in the bean containers.

Coffee or espresso can be made from whole roasted coffee beans which are freshly ground for each cup. This requires the bean containers to be filled with coffee beans.

The coffee machine has 2 bean container drawers on the top left and right. Coffee beans from all 3 bean containers are mixed together during grinding.



Open the appliance door.

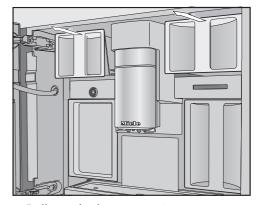

- Pull out the bean containers.
- Take the lids off the bean containers and fill them with coffee beans.
- Put the lids back on the bean containers to seal them.
- Slide the bean container drawers all the way into the coffee machine.
- Close the appliance door.

# Filling the water tank


Risk to health due to contaminated water.

Bacteria can develop in water which has been sitting in the water container for too long and is a risk to your health.


Change the water in the water container **every day**.

Risk of damage due to incorrect operation.

Unsuitable liquids such as hot or warm water or other liquids can damage the coffee machine. Carbonated water leaves too much limescale in the coffee machine. Only use cold, fresh tap water to fill the water container.

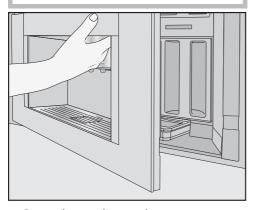

■ Open the appliance door.

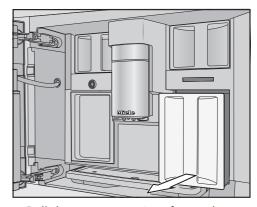

- Pull the water container forward to remove it.
- Fill the water container with fresh, cold drinking water up to the max. mark.
- Push the water container into the appliance.
- Close the appliance door.

# Switching the coffee machine on

■ Tap the On/Off switch ①.

The coffee machine heats up and rinses the pipework. Hot water will run out of the central spout.

You can now make drinks.

If the coffee machine is already at operating temperature, rinsing will not take place when the machine is switched on.

# Switching the coffee machine off

■ Tap the On/Off switch ①.

If coffee has been dispensed, the coffee machine will rinse the pipework automatically before switching off.

While dispensing a drink or during maintenance processes, moisture builds up in the coffee machine. Once a drink has been dispensed or the machine has been switched off, the internal fan will continue to run until the interior is sufficiently dehumidified. You will hear an accompanying noise.

# Preparing for an extended period of inactivity

If the coffee machine is not going to be used for a while, e.g., if you are going on vacation, remember to do the following:

- Empty the drip tray, the grounds container, and the water container.
- Clean all parts thoroughly, including the brew unit and interior of the appliance.
- Switch the coffee machine off.

Danger of burning and scalding at the dispensers.

The liquids and steam dispensed are very hot and can cause scalding.
Keep away from the area underneath the dispensers when hot liquids and steam are being dispensed.

Do not touch hot components.

#### Coffee

#### Coffee drinks in detail

You can use the coffee machine to prepare the following coffee-based drinks:

- Ristretto is a concentrated, stronger espresso. It is prepared with the same amount of coffee as for an espresso but with a lot less water.
- Espresso is a strong aromatic coffee with a thick hazelnut-brown colored froth – known as the crema – on top.
   We recommend using espressoroasted coffee beans to make an espresso.
- Coffee differs from espresso by the increased amount of water and the roast of the beans.
   We recommend using coffee beans of the correct roast to make the coffee.
- **Long Coffee** is a coffee with significantly more water.
- Long black is made with hot water and two shots of espresso.
- Caffè Americano consists of equal proportions of espresso and hot water. The espresso is made first, then the hot water is dispensed.
- Cappuccino consists of approx.
   2 thirds milk froth and 1 third espresso.

- Latte macchiato consists of 1 third each of hot milk, milk froth, and espresso.
- Caffè latte consists of espresso and hot milk.
- Cappuccino Italiano has the same proportions of milk froth and espresso as a cappuccino. The difference is that the espresso is added first and then the milk froth
- Espresso macchiato is an espresso with a small amount of milk froth on top.
- Flat white is a special variety of capuccino that contains significantly more espresso than milk froth for an intensive coffee aroma.
- Café au lait is a French style of coffee consisting of coffee and milk froth.
   Café au lait is usually served in a bowl.

Hot milk and milk froth can also be made.

#### The milk

Cow's milk or alternative plant-based dairy products (e.g., soy milk) containing added sugar can clog up the milk pipe and milk pipework. Residues from unsuitable liquids can interfere with milk preparation. The milk used must not contain any additives.

Dairy milk naturally contains bacteria. If using dairy milk make sure that it has been pasteurized, e.g., pasteurized cow's milk.

Once the appliance has heated up, the milk will be drawn up into the central spout where it is heated by steam and also frothed for drinks requiring milk froth.

You can prepare hot milk and milk froth using cow's milk or alternative plant-based dairy products. However, the consistency of the milk froth will vary greatly depending on the type of milk used. Not all types of milk are suitable for milk froth.

**Tip:** Using cold cow's milk (< 50°F/10°C) with a protein content of at least 3% will produce the perfect milk froth. You can select milk with a fat content according to your personal preference. With whole milk (at least 3.5% fat), the milk froth will be slightly creamier than with low-fat milk.

Alternative plant-based dairy products — hereafter referred to as "alternative dairy products" — contain different ingredients than cow's milk, for example. Due to natural settling, dairy products tend to thicken. When preparing hot milk or milk froth, this thicker consistency can prevent the alternative dairy products from being drawn into the milk pipework.

Stir alternative dairy products well immediately before preparation.

Do not shake alternative dairy products. Shaking causes foam to form in the packaging and impairs the preparation process.

**Tip:** Rinse the milk pipework manually immediately after preparation.

#### Filling and inserting the milk flask

Milk is **not** cooled in the milk flask. Milk may spoil if it is left in the milk flask for an extended period without being cooled (depending on the type of milk).


In particular, do not leave cow's milk in the milk flask for an extended period without cooling it.

Please follow the manufacturer's instructions regarding the shelf life of the milk used.


If you have not made any milk drinks for a while, rinse the milk pipework thoroughly before making the first drink.

**Tip:** For high-quality milk froth, always use cold milk (< 50°F/10°C).

- If you use alternative dairy products, make sure that you stir it well. To ensure the best preparation, alternative dairy products must be stirred and not shaken.
- Fill the milk flask with milk up to a maximum of 3/4" (2 cm) below the rim.
- Seal the milk flask with the lid.

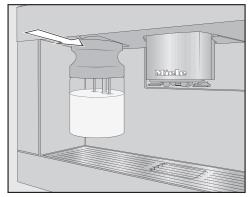

Push the milk flask back into the coffee machine until it clicks into place.

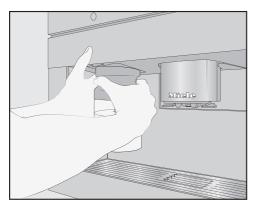

**Tip:** It is easier to remove the milk flask with both hands.

#### Making a coffee drink



- Place a cup under the central spout.
- If you want to make a coffee with hot milk or milk froth, prepare the milk flask and insert it into the appliance.
- Tap the sensor control for the drink you want.

The drink you have selected will be dispensed from the central spout into your cup.

#### Canceling a drink

■ Tap the lit orange symbol on the control panel again.

When preparing drinks with several ingredients (e.g., latte macchiato), you can cancel each of the individual components prematurely.

■ When Stop appears in the display, confirm with *OK*.

#### **DoubleShot**

Select the DoubleShot  $\mathcal{O}$  function if you would like a particularly strong and aromatic coffee. In this case, more coffee beans will be ground and brewed halfway through brewing.

The shorter extraction time means that fewer unwanted aromas and bitter compounds will be released.


#### Making a DoubleShot @ of coffee

■ Tap the ② sensor button immediately before or after you start making a drink.

Dispensing starts and the  $\mathcal{O}$  sensor button lights up. 2 portions of coffee beans will be ground and brewed.

#### Making 2 portions 🗇

You can dispense 2 portions of a drink into 1 large cup or into 2 cups at the same time.

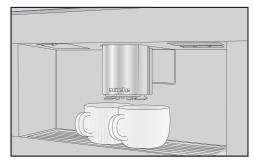

Place a cup under each of the dispensing spouts in the central spout.

■ Tap the sensor control immediately before or after you start making a drink.

The 🗇 sensor control lights up.

Dispensing starts and 2 portions of the desired drink will be dispensed.

#### Coffee pot

You can make several cups of coffee one after the other automatically with the Coffee Pot function (maximum of 1 liter).

The drinks menu is displayed.

**Tip:** Make sure that the bean and water containers have enough beans and water inside them before starting the Coffee Pot function.

- Place a sufficiently large container under the central spout.
- Touch the □ sensor control.
- Select Coffee Pot.
- Confirm with OK.
- Select the number of cups you want (3 to 8).

Each portion of coffee will be ground, brewed, and dispensed individually. You can follow the process on the display.

#### Canceling a drink

■ Touch the □ sensor control.

#### Tea

If the dispensing temperature is too high or too low or if the brewing time is too short or too long, this can affect the flavor of your tea.

Follow the instructions provided by the manufacturer of the tea you are making. The coffee machine is not intended for commercial or scientific purposes. Dispensing temperatures given are approximate and can vary according to ambient conditions.

When making tea, you can select from the following options:

 Japanese Tea is a high-quality green tea which boasts a fine, fresh, "green" taste.

Dispensed temperature: approx. 150°F (65°C), brewing time: approx. 1.5 minutes

- White Tea is a green tea where only the young buds of the tea plant are used and processed very gently.
   White tea has a particularly mild taste.
   Dispensed temperature: approx. 160°F (70°C), brewing time: approx. 2 minutes
- Green Tea gets its green color from the leaves of the tea plant. The tea leaves are either roasted or steamed depending on the region. Green tea can be infused multiple times.
   Dispensed temperature: approx. 175°F (80°C), brewing time: approx. 2.5 minutes
- Black Tea gets its dark color and characteristic taste from the fermentation of tea leaves. Black tea can be enjoyed with a little lemon or milk.

Dispensed temperature: approx. 210°F (97°C), brewing time: approx. 3 minutes

 Chai Latte has its origins in traditional Ayurveda medicine as a black tea with typically Indian spices and milk. The milk mellows the spices and tops off the flavor experience.

Dispensed temperature: approx. 210°F (97°C), brewing time: approx. 3 minutes

- Herbal Tea is an aromatic infusion drink made up of dried leaves or fresh parts of plants.
   Dispensed temperature: approx. 210°F (97°C), brewing time: approx. 8 minutes
- Fruit Tea is made from dried pieces of fruit and/or parts of plants, e.g., rose hip. The taste of the drink varies according to which plants are used and how they are blended. Lots of fruit teas are also flavored.
   Dispensed temperature:

Dispensed temperature: approx. 210°F (97°C), brewing time: approx. 8 minutes

The preset dispensing temperature varies depending on the type of tea. The respective dispensing temperatures are the ones that Miele recommends for making the types of tea concerned.

Whether you use loose tea leaves, blended tea, or tea bags depends on your own personal preference.

The amount of tea required varies from one type of tea to another. Always follow the recommendations of the manufacturer on the packaging or of the retailer. You can adjust the amount of water according to the type of tea and the size of the cup (see "Changing the portion size").

#### Making tea

Tap the  $\bigcirc$  sensor control to access the menu containing the various types of tea.

The drinks menu is displayed.

Pour loose tea into a tea filter or similar or take a tea bag out of the packet.

- Place the tea filter or the tea bag in the tea cup.
- Place the tea cup under the central spout.
- Tap \_\_\_.
- Select the type of tea you would like.
- Confirm with OK.

Hot water will be dispensed into the cup.

If the TeaTimer | Automatic setting has been selected, the kitchen timer for the brewing time will start running once the water has been dispensed.

Alternatively, you can also start the TeaTimer function manually at this point.

Remove the tea filter or tea bag when the desired brewing time has elapsed.

#### Starting the TeaTimer manually

■ Prepare a cup of tea.

TeaTimer appears in the display as soon as the water has been dispensed.

**■** Tap *OK*.

The editor will open with a suggested time.

- Change the brewing time if required.
- Confirm with OK.

After the brewing time has elapsed, an audible signal will sound and the  $\triangle$  symbol will flash.

■ Remove the tea filter or tea bag when the desired brewing time has elapsed.

#### Tea pot

The Tea Pot function allows you to make a large quantity of tea (maximum of 1 liter). The type of tea selected determines the preset temperature.

The drinks menu is displayed.

**Tip:** Make sure that the water container has enough water inside it before starting the Tea Pot function.

- Place a sufficiently large container under the central spout.
- Tap the drinks sensor button.
- Select Tea Pot.
- Select the type of tea and number of cups you want (3 to 8).

#### Canceling a drink

■ Tap the sensor button.

#### Dispensing warm or hot water

You can choose between the following options:

- Hot water at approx. 195°F (90°C)
- Warm water at approx. 150°F (65°C)

The drinks menu is displayed.

- Place a suitable container under the central spout.
- Tap the □ sensor button.
- Choose between warm or hot water.
- Confirm with OK.

Dispensing will start.

# **Expert Mode**

The Expert Mode function allows you to change the portion size while the drink is being made. The setting will **not** be saved and will only apply to the current drink.

# Switching Expert mode on and off

The drinks menu is displayed.

- Touch the ☐ sensor control.
- Select Settings 🟲 | Expert Mode.
- Select the option you want.
- Confirm with OK.

The setting is now saved.

# Expert mode: changing the portion size


The drinks menu is displayed.

The portion size can only be changed during the individual preparation stages.

If you select DoubleShot  $\mathcal{O}$  or 2 portions  $\square$ , Expert mode cannot be used to change the portion size.

Select a drink.

Dispensing will start. You can adjust the portion size while it is being dispensed, e.g., individually change the amount of hot milk, milk froth, and espresso for a latte macchiato.

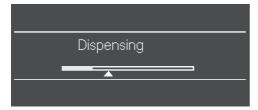

Move the indicator (small triangle) across the navigation area according to the portion size you want. The grinder setting determines the contact time between the ground coffee and the water, known as the extraction time. Only when the ideal grinder setting is selected can the machine dispense a perfect cup of coffee with a fine, hazelnut-brown crema.

# Identifying the ideal grinder setting

There are various ways to tell whether the coffee grinder is set correctly.

The grinder setting is **too coarse** if the coffee or espresso is watery and tastes acidic. The crema is very pale.

The grinder setting is **too fine** if the coffee or espresso tastes too bitter and the crema is dark brown.

# Adjusting the fineness of grind


If the grinder setting is adjusted by more than one level, the grinder may be damaged.

Only adjust the grinder one setting at a time.

Each time you adjust the setting, start making a new drink so that the beans are ground. Adjust the grinder setting one setting at a time again.

The slide control for adjusting the fineness is located on the top left behind the water container.

- Open the appliance door.
- Remove the water container.

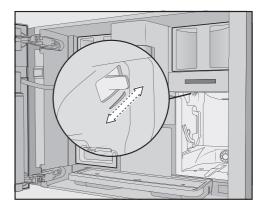

Push the slide control exactly 1 setting forward (for finer grinding) or one setting backward (for coarser grinding).

The grinder setting you select will be used for all types of beans and coffee drinks.

- Put the water container back in place.
- Close the appliance door.
- Make one cup of coffee.

After this, you can adjust the grinder setting again.

The grinder will naturally wear out slightly over time. Set the grinder to a finer setting if necessary.

#### **Parameters**

#### Amount of coffee

The coffee machine can grind and brew 7.5–12.5 g of coffee beans per cup. The greater the amount, the stronger the coffee.

The amount of coffee is **too low** if the espresso or coffee lacks body.

Increase the amount of coffee to brew more ground coffee.

The amount of coffee is **too high** if the espresso or coffee tastes bitter.

Decrease the amount of coffee to brew less ground coffee.

#### Pre-brewing ground coffee

When the pre-brewing function is turned on, the ground coffee is first moistened with a little hot water. The ground coffee swells a little. Then the remaining water is forced through the moistened coffee at high pressure. If your coffee tastes too bland and you want too add some spice and richness, try the "Pre-brewing" function. Depending on the type of coffee used, pre-brewing can intensify the taste.

You can set a short or long duration for pre-brewing or turn the "Pre-brewing" function off completely.

**Tip:** It is particularly recommended to use the "Pre-brewing" function to make coffee.

# Brewing temperature for coffee drinks

The brewing temperature must be adapted to the roast of the beans you are using. This is crucial whether you are making espresso or coffee.

Several types are sensitive to high brewing temperatures, resulting in an impaired taste. If your coffee tastes bitter, the brewing temperature you have selected might be too high.

Espresso is usually brewed at higher temperatures.

# Dispensing temperature for tea drinks

You can adjust the dispensing temperatures used for the individual teas by customizing the brewing temperature.

A temperature increment of approximately 35°F (2°C) makes a noticeable difference.

#### **Portion size**

The flavor of the coffee produced depends not only on the type of coffee, but also on the amount of water used. You can program the amount of water for all drinks (apart from the Coffee Pot function) to suit the size of your cups and/or the type of coffee you are using.

For coffee drinks that use milk, you can also set the amount of milk or milk froth to be dispensed with these drinks, as well as the amount of coffee or espresso.

A maximum portion size can be programmed for each type of drink. Dispensing stops once this has been reached. The maximum possible portion size is then saved by the appliance for this type of drink.

# Displaying and changing parameters

You can change the portion size for all drinks.

In addition, you can set the amount of coffee, brew temperature, and prebrewing parameters for each coffee drink individually.

- Touch the ② sensor control.
- Select a drink.
- Confirm with OK.

The parameters that can be changed for this drink are displayed.

Once you have selected a drink, the current settings for the following appear: Amount of coffee, Brew temperature, and Pre-brewing.

The Portion size menu option is displayed in the first line. If you select Portion size and confirm with *OK*, the drink will be dispensed immediately.

- Select the parameter you want.
- Change the setting as required.
- Confirm with OK.

The setting is now saved.

#### Changing the portion size

You can change the portion size in Expert mode for the current drink or on a permanent basis. If you want to change the portion size of the drink permanently, change the Portion size parameter.

- Place a cup under the central spout.
- Tap □.
- Select Parameters.
- Select a drink.
- Confirm with OK.

The parameters that can be changed for this drink are displayed.

- Select Portion size.
- Confirm with OK.

The required drink will now be made. As soon as the minimum amount has been made, Save will be shown on the display.

■ When the container is filled to the desired level, tap *OK*.

If you want to change the portion size for coffee with milk, the ingredients of the drink are saved one after the other during preparation.

■ When the quantity for each ingredient reaches the desired level, tap *OK*.

The programmed portion size will now be dispensed every time that particular drink is selected.

**Tip:** For the drinks pictured on the control panel, you can change the portion size by pressing and holding the button down. To do this, keep the drinks button pressed until the machine starts dispensing. As soon as the minimum amount has been made, Save will be shown on the display.

If the water container becomes empty while making a drink, the coffee machine will stop programming the portion size. The new portion size will **not** be saved.

#### **Profiles**

#### **Profiles**

In addition to the Miele drinks menu (Miele profile), you can create individual profiles to cater for different tastes and preferences.

Within the profile, you can adjust the portion sizes and parameters individually for all drinks.

The name of the current profile is shown in the top left of the display.

#### Creating a profile

■ Touch the å sensor control.

The Profiles menu opens.

- Select Create profile.
- Confirm with OK.

The editor will open in the display.

- Enter the profile name:
- To enter a character, highlight the one you want and confirm your choice with *OK*.
- To delete a character, tap the ≤ sensor control.
- To save the name, select the checkmark ✓ and confirm with OK.

The profile is created.

### Changing drinks within a profile

When you change the parameters of a drink within a profile, these settings only apply to the active profile. The settings for drinks contained within other profiles remain unaffected.

■ Touch the 🛔 sensor control.

The Profiles menu opens.

■ Select the profile you want.

The name of the selected profile is shown in the top left of the display.

You can now change the drinks individually.

#### Making drinks stored in a profile

- Tap the 🛔 sensor button.
- Select the profile you want.
- Select the drink you want.

The machine starts dispensing the drink.

#### **Editing profiles**

Once you have created at least one profile, you can edit the profiles in the Profiles menu.

■ Touch the 🛔 sensor control.

The Profiles menu opens.

- Select Edit.
- Confirm with OK.

You can now edit the following settings for the selected profile:

- setting when the profile should change
- changing the profile name
- deleting the profile

# Setting when the profile should change

■ Touch the 🛔 sensor control.

The Profiles menu opens.

- Select Edit.
- Confirm with OK.
- Select Change profile.
- Confirm with OK.

You have the following options:

 Manual: The selected profile will remain active until you select another one.

- After each use: The machine will revert to the Miele profile whenever a drink is dispensed.
- When turned on: The Miele profile will be displayed whenever the coffee machine is switched on, regardless of which profile was selected before the machine was last switched off.
- Select the option you want.
- Confirm with OK.

#### Changing the profile name

This option can only be selected if a profile has been allocated in addition to the Miele standard profile.

■ Touch the ♣ sensor control.

The Profiles menu opens.

- Select Edit.
- Confirm with OK.
- Select Change name.
- Confirm with OK.
- Change the name as required:
- To delete a character, tap the ≤ sensor control.
- To enter a new character, highlight the one you want and confirm your choice with *OK*.
- Confirm with OK.

#### **Deleting the profile**

This selection is only possible if a user profile has been allocated in addition to the Miele standard user profile.

■ Touch the ♣ sensor control.

The Profiles menu opens.

- Select Edit.
- Confirm with OK.
- Select Delete profile.
- Confirm with OK.
- Select the profile you wish to delete.
- Select Yes.
- Confirm with OK.

The profile will be deleted.

#### **MobileStart**

With MobileStart you can, for example, start making a drink via the Miele app.

You will only be able to use MobileStart if Miele@home has been set up for your coffee machine.

Danger of burning and scalding at the dispensers.

If liquids or steam are dispensed while the machine is unsupervised, persons may burn themselves if they place body parts under the central spout or touch hot components. Ensure that no one, especially children, can be harmed if the machine is operated without supervision.

The pipework is not pre-warmed when the machine is switched on either, meaning that the cup under the central spout is not filled with rinse water.

Milk is not cooled in the milk flask. If you want to start making a drink with milk using the app, make sure that the milk is sufficiently cold (< 50°F/10°C). If the coffee machine is being operated manually, it cannot be operated via the app. Operation on the machine takes

To start making drinks remotely, Mobile Start must be activated. Make sure that the coffee machine is ready to use, for example check that the water container is sufficiently filled. Place a sufficiently large, empty cup under the central spout.

MobileStart will be deactivated after 24 hours.

If you are making a drink with MobileStart, you will be notified of drink dispensing with acoustic and optical signals. These warning signals cannot be changed or switched off.

# Switching MobileStart on and off

If you want to use Mobile Start, the Remote control option must be switched on.

The drinks menu is displayed.

- Tap the 🗇 sensor button.
- Select Mobile Start.
- Select the option you want and confirm with *OK*.

Once you have switched on Mobile Start, you can now start making a drink via the app. Follow the prompts to do this.

precedence.

You can use the "Settings" menu to customize the coffee system to suit your individual requirements.

# Displaying and changing Settings

The drinks menu is displayed.

- Tap the ☐ sensor control.
- Select Settings .
- Confirm with OK.
- Select the menu option that you want to display or change.
- Confirm with OK.
- Change the setting as required.
- Confirm with OK.

Some settings which can be found in the Settings menu are described in separate sections of the operating instructions.

#### Language

You can select the language and, if applicable, your location for all display text.

**Tip:** If you select the wrong language by mistake, you can find the Language option again via the **\*** symbol.

#### Time

#### Display (time display)

Select how you want the time of day to show in the display when the coffee machine is switched off:

- **On**: The time is always visible in the display.
- **Off**: The time is not visible in the display.

 Night dimming: To save energy, the time is displayed from 5:00 am to 11:00 pm only.

#### **Clock format**

- 24-hour display (24 h)
- **12-hour display (12 h)**

#### **Setting**

Set the hours and the minutes.

If the coffee machine has been connected to a Wi-Fi network and signed into the Miele app, the time will be synchronized based on the location setting in the Miele app.

#### **Date**

Set the date.

#### Timer

The coffee machine has 3 timers:

- Turn on at
- Turn off at
- Off after

You can allocate the individual timer functions to different days of the week.

#### On at

The coffee machine switches on at a particular time, e.g., in the morning for breakfast.

The coffee machine will **not** switch on at the required time if you have activated the system lock.

The timer settings are deactivated.

### **Settings**

Once the coffee machine has come on automatically **three times** at the set time without any drinks being dispensed, it will stop switching on automatically. This prevents the coffee machine from switching itself on unnecessarily, for example, while you are on vacation.

The programmed times will, however, remain in memory and will be reactivated after manually switching the machine on again.

If you have set the time to be displayed while the machine is turned off (Show | On or Night dimming), the symbol and the desired switch-on time will appear in the display 23:59 hours beforehand.

#### Off at

The coffee machine switches off at a particular time.

In the event of a longer absence, the programmed times will remain in the memory and will be reactivated when the machine is next switched back on manually.

#### Off after

The coffee machine switches off after a particular length of time if no sensor buttons have been pressed.

By default, the coffee machine switches off after 20 minutes.

You can change this to another time between 20 minutes and 9 hours.

#### **TeaTimer**

You can use the TeaTimer function to start a kitchen timer when making tea. There is a preset brewing time for the type of tea selected. You can adjust the preset brewing time (up to a maximum of 14:59 minutes).

You can set the TeaTimer as follows:

- Automatically: The TeaTimer starts automatically once the water has been dispensed.
- Manual: You have the option of starting the TeaTimer once the water has been dispensed.

While the brewing time is counting down, you can continue to use the coffee machine as normal. After the brewing time has elapsed, an audible signal will sound and the  $\triangle$  symbol will flash.

#### Volume

You can set the volume of the audible signal and keypad tones (segment bar).

The welcome melody that plays when you tap the On/Off button ① can be switched on or off.

#### Display brightness

You can set the display brightness (segment bar).

#### Lighting

You can change the brightness of the lighting while the coffee machine is switched on or off.

You can also specify how long the lighting should stay on for when the machine is switched off (adjustable between 15 minutes and 9 hours).

#### Info (display information)

You can display the number of drinks dispensed so far and how many more can be dispensed until the maintenance programs have to be run.

#### **Altitude**

If the coffee machine is installed at high altitudes, the lower air pressure will cause the water to boil at a correspondingly lower temperature.

You can set the local altitude to ensure the ideal drink preparation temperatures.

#### **Performance Mode**

You can select the appropriate Performance Mode for how you use your machine. Eco Mode is set by default.

#### **Eco Mode**

Eco Mode is an energy-saving mode. The system does not heat up until someone starts making a drink.

#### **Barista Mode**

This Performance Mode has been optimized for unadulterated coffee enjoyment. Users can enjoy coffee-based drinks without any delay as the coffee machine remains heated to the brewing temperature. This mode consumes more energy than Eco Mode.

#### Latte Mode

This Performance Mode has been optimized for preparing milk. Milk-based drinks can be prepared within a much shorter space of time. This mode consumes more energy than Eco Mode and Barista Mode.

#### **Party Mode**

This Performance Mode has been configured for the **occasional** intensive use of the coffee machine, e.g., for family get-togethers.

Clean the coffee machine thoroughly after intensive use, particularly the milk pipework. It may be necessary to descale the coffee machine and degrease the brew unit.

Please note the following information about Party Mode:

- The general pipework is rinsed much less frequently or not at all. The milk pipework is not rinsed until around 1 hour after milk was last dispensed.
- Cleaning status messages or cleaning prompts are suppressed and delayed until the machine is next switched on.
- The Turn off at and Turn off after timers are deactivated. The coffee machine switches off 6 hours after the last sensor button was pressed.
- The cup light remains permanently switched on at the maximum brightness level for as long as the coffee machine stays switched on.

#### Water hardness

Program the coffee machine to the water hardness level of your area so that it functions correctly and does not get damaged.

Your local water authority will be able to tell you the hardness of the water in your area.

If you are using bottled drinking water, e.g., mineral water, select settings according to the calcium content. The calcium content is given on the label of the bottle in mg/I Ca<sup>2+</sup> or ppm (mg Ca<sup>2+</sup>/ I).

Do not use carbonated water.

The hardness level is set to 21.8 gpg (21°dH) by default.

### **Settings**

Water I	nardness	Calcium	Setting
°dH	gpg	mg/l Ca <sup>2+</sup> or ppm (mg Ca <sup>2+</sup> /l)	
1	1	7	1
2	2	14	2
3	3	21	3
4	4	29	4
5	5	36	5
6	6	43	6
7	7	50	7
8	8	57	8
9	9	64	9
10	10	71	10
11	11	79	11
12	12	86	12
13	14	93	13
14	15	100	14
15	16	107	15
16	17	114	16
17	18	121	17
18	19	129	18
19	20	136	19
20	21	143	20
21	22	150	21
22	23	157	22
23	24	164	23
24	25	171	24
25	26	179	25
26	27	186	26
27	28	193	27
28	29	200	28
29	30	207	29
30	31	214	30
31	32	221	31

Water hardness		Calcium	Setting
°dH	gpg	mg/l Ca <sup>2+</sup> or ppm (mg Ca <sup>2+</sup> /l)	
32	33	229	32
33	34	236	33
34	35	243	34
35	36	250	35
36	37	257	36
37–45	38–47	258–321	37–45
46-60	48–62	322–429	46–60
61–70	63–73	430–500	61–70

**Tip:** If your water hardness is > 21.8 gpg (21°dH), we recommend using bottled drinking water instead (< 150 mg/ I Ca<sup>2+</sup>). This will mean your coffee machine will need to be descaled less often and there will be less impact on the environment because less descaling agent will be used.

## System lock 🔂

You can lock the coffee machine to prevent it from being used by unauthorized persons, such as children.

When the system lock is activated, the settings for the Turn on at timer are deactivated. The coffee machine will **not** switch on at the time set.

# Temporarily deactivating the system lock $\widehat{\Box}$

■ Press and hold OK for 6 seconds.

The system lock is reactivated when the coffee machine is next switched off.

#### Miele@home

The following points may appear under Miele@home:

- Set up: This option only appears if the coffee machine has never been connected to a Wi-Fi network or if the network configuration has been reset.
- Deactivate\*/Activate\*: The settings for the Wi-Fi network are retained, but the network is switched on or off.
- Connection status\*: Information about the Wi-Fi connection is displayed. The symbols indicate the strength of the connection.
- Set up again\*: The settings for the current Wi-Fi network will be reset.
   The Wi-Fi connection will be set up again.
- Reset\*: The Wi-Fi is switched off and the settings for the current Wi-Fi network will be reset.

The network configuration should be reset whenever the coffee machine is being disposed of or sold, or if a used coffee machine is being put into operation. This is the only way to ensure that all personal data has been removed and the previous owner will no longer be able to access the coffee machine.

\* This menu option appears if Miele@home has been set up and the coffee machine has — where applicable — been connected to a Wi-Fi network.

#### Remote control

The Remote control menu option appears if Miele@home has been set up and the coffee machine has been connected to a Wi-Fi network.

You can change the coffee machine settings, for example, in the Miele app when remote control is switched on. To start making a drink via the app, MobileStart also needs to be activated. The remote control function is switched

### RemoteUpdate

on by default.

The RemoteUpdate function allows the software on your coffee machine to be updated. If an update is available for your coffee machine, it will automatically download it. Updates will not be installed automatically. They must be initiated manually.

If you do not install an update, you can continue to use your coffee machine in the usual way. However, Miele recommends installing updates.

The RemoteUpdate menu option is only displayed and can only be selected if the requirements for using Miele@home have been met.

The RemoteUpdate function is activated by default. Available updates will be downloaded automatically but will only be installed if you initiate installation manually.

Deactivate RemoteUpdate if you do not want any updates to be downloaded automatically.

#### Running a RemoteUpdate

Information about the content and scope of an update is provided in the Miele app.

A message will appear in your coffee machine display if an update is ready for installation.

## **Settings**

You can install the update immediately or postpone this until later. You will be reminded about the update the next time you switch the coffee machine on. Deactivate RemoteUpdate if you do not want to install the update.

The update may take several minutes.

Keep in mind the following with respect to RemoteUpdates:

- You will only receive a message when a RemoteUpdate is available.
- Once a RemoteUpdate has been installed, it cannot be undone.
- Do not switch the coffee machine off during the update. Otherwise, the update will be aborted and will not be installed.
- Some software updates can only be carried out by Miele Service.

#### Software version

The "Software version" menu option is intended for Miele Technical Service. You do not need this information for domestic use.

# Showroom program (Demo mode)

Do not activate this setting for domestic use.

The Demo Mode | Demo Mode function enables the coffee machine to be demonstrated in shops or showrooms. In this mode, the machine lights up but no drinks can be prepared and no maintenance programs can be run.

You can activate demo mode without commissioning the appliance for the first time. Switch the coffee machine on and off again. Press the 

/ Back button for 5 seconds straight away. Demo mode is activated.

#### **Factory default settings**

You can reset the coffee machine to its factory default settings.

The following will **not** be reset:

- The number of drinks and the machine status (No. of portions until machine needs descaling, ... degreasing the brew unit)
- Language
- Time and date
- Profiles and the associated drinks
- Miele@home

Risk to health due to inadequate cleaning.

Heat and moisture inside the coffee machine can cause coffee residues to become moldy and/or milk residues to go off and pose a risk to health. Carefully clean the coffee machine regularly.

## Overview of cleaning intervals

Recommended frequency	What do I have to clean/maintain?
Daily	Milk flask and lid
(at the end of the day)	Milk valve
	Water container
	Drip-tray cover
	Drip tray and grounds container
Once a week	Central spout
(more often if heavily soiled)	Cup-rim sensor
	Interior
	Brew unit
	Drip tray
	Front of machine
Once a month	Remove and clean the milk valve
	Bean container
As and when required/after prompt	Milk pipework (using the cleaning agent for milk pipework)
appears in display	Degrease the brew unit (using cleaning tablets)
	Descale the machine

#### Clean by hand or in dishwasher

The brew unit is **not** dishwasher safe. Only clean the brew unit by hand with warm water. **Do not use any cleaning agents**.

The following components must be cleaned **by hand only**:

- Central spout stainless steel cover
- Brew unit
- Bean containers and lids

Risk of damage as a result of excessively high dishwasher temperatures.

Components may be ruined (e.g., may become warped) if washed in a dishwasher at temperatures higher than 130°F (55°C).

For dishwasher-safe components, always select dishwasher programs with a maximum temperature of 130°F (55°C).

Contact with natural dyes, such as those found in carrots, tomatoes, and ketchup, may discolor the plastic parts in the dishwasher. This discoloration does not affect the stability of the parts.

The following parts are **dishwasher-safe**:

- Drip tray, lid, and grounds container
- Drip tray cover
- Central spout (without stainless steel cover)
- Milk flask with lid
- Cup sensor
- Drip tray

- Maintenance container
- Water container

Danger of burning and scalding on hot components or by hot liquids. Components can become very hot during operation. Touching hot components can cause burning. The liquids and steam dispensed are very hot and can cause scalding.

Keep away from the area underneath the dispensers when hot liquids and steam are being dispensed.

Always allow the coffee machine to cool down before cleaning it.

Please be aware that water in the drip tray can also be very hot.

A Risk of damage due to moisture ingress.

The steam from a steam cleaning appliance could reach electrical components and cause a short circuit.

Do not use a steam cleaner to clean the coffee machine.

It is important to clean the appliance regularly. Milk residues can go off and can block the milk pipe.

#### Unsuitable cleaning agents

Contact with unsuitable cleaning agents can alter or discolor all surfaces. All surfaces are susceptible to scratching. Scratches on glass can in some circumstances lead to breakage.

Remove any residual cleaning agent immediately. Make sure you remove any spillages or splashes of descaling agent immediately.

To avoid damaging the surfaces of your appliance, do not use:


- Cleaning agents containing soda, ammonia, acids, or chlorides
- Solvent-based cleaning agents
- Cleaning agents containing descaling agents (unsuitable for cleaning the front of the machine)
- Stainless steel cleaning agents
- Dishwasher cleaners (unsuitable for cleaning the front of the machine)
- Glass cleaners
- Cleaning agents for ceramic cooktops
- Oven cleaners
- Abrasive cleaning agents, such as scouring powder, scouring liquid, or pumice stones
- Hard abrasive brushes or sponges, such as pot scourers or sponges which have been previously used with abrasive cleaning agents
- Eraser sponges
- Sharp metal scrapers
- Steel wool or stainless steel wire scourers

# Cleaning the drip tray and grounds container


Danger of burning and scalding on hot components or by hot liquids. Components can become very hot during operation. Touching hot components can cause burning. The liquids and steam dispensed are very hot and can cause scalding. If the pipework has just been rinsed, wait a while before removing the drip tray from the coffee machine. Please be aware that water in the drip tray can also be very hot. Do not touch hot components.

Clean the drip tray and grounds container **every day** to avoid unpleasant smells and mold fungi.

A prompt will appear in the coffee machine display when the drip tray and/ or the grounds container is full and needs to be emptied. Empty the drip tray **and** the grounds container. It is not necessary to take the lid off the drip tray in order to empty it.

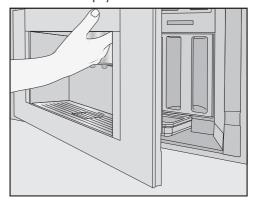


■ Open the appliance door.

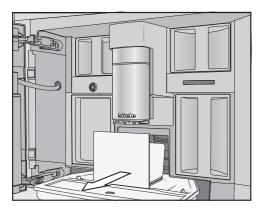

- Remove the drip tray and grounds container from the machine.
- Empty the grounds container after removing it from the drip tray.

The grounds container may contain a small amount of water from rinsing as well as the leftover coffee grounds.

#### Taking the drip tray apart



The orange clips are not removable.


- Take the lid off the drip tray as follows: press the orange clips outward on both sides to release the lid.
- Remove the lid.

- Clean the drip tray, lid, and grounds container by hand using warm water and a little liquid dish soap.
- Dry all parts.

**Tip:** To give the drip tray, lid, and grounds container an extra thorough clean, clean them in the dishwasher from time to time. If the drip tray is heavily soiled, clean it with a brush before placing it in the dishwasher.

■ Clean the drip tray recess inside of the coffee machine.

#### Cleaning the contacts on the drip tray




- Clean the contacts (metal discs) and the space between them carefully, e.g., using a brush.
- Dry all parts thoroughly.


The contacts will not be able to detect that the drip tray is full if they are damp or dirty.

Check the contacts and the area around them once a week.

#### Reassembling the drip tray

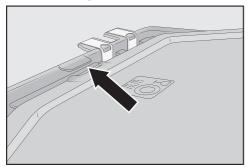


Attach the drip tray lid as follows: slide the lid under the lug next to the contacts and apply pressure to the lid until the catches at the sides audibly click into place.

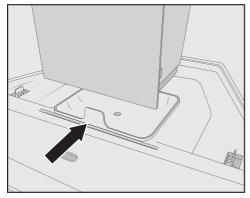

- Place the grounds container on the lid.
- Push the drip tray and grounds container back into the coffee machine.
- Close the appliance door.

#### Cleaning the drip tray cover

Clean the drip tray cover on a daily basis.

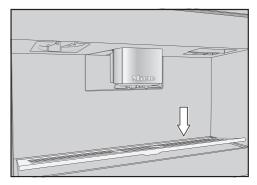


- Remove the drip tray cover as follows: apply pressure to the rear edge so that the cover tips forward and you can remove it easily.
- Clean the drip tray cover by hand using a mild solution of warm water and liquid dish soap.
- Dry the drip tray cover.
- Replace the drip tray cover.

**Tip:** To give the drip tray cover an extra thorough clean, clean it in the dishwasher from time to time

#### Cleaning the water container


Clean the water container every day.

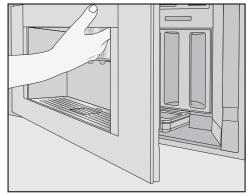

- Open the appliance door.
- Remove the water container.

- Clean the water container every day with a mild solution of warm water and liquid dish soap.
- Rinse the water container with clean water to remove any remaining liquid dish soap.
- Dry the outside of the water container.

**Tip:** To give the water container an extra thorough clean, clean it in the dishwasher from time to time.

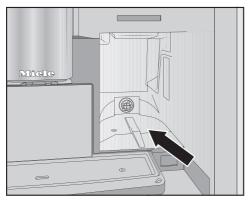


- Clean and dry the surface that the water container sits on.
- Fill the water container with fresh, cold drinking water.
- Push the water container all the way into the coffee machine until you feel a resistance.
- Close the appliance door.

#### Cleaning the central spout


Clean the central spout's stainless steel cover by hand only using a mild solution of warm water and liquid dish soap.

Clean all parts of the central spout at least once a week.


#### Removing the central spout




Open the appliance door.

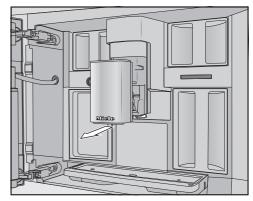

- Pull the central spout's stainless steel cover forward to remove it.
- Clean the central spout's stainless steel cover.

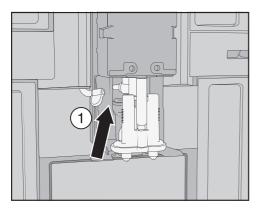


■ Detach the milk pipework from the dispensing unit as follows: pull the pull tab ① to the left.




Do **not** remove the milk pipework connecting piece.

If necessary, clean the connecting piece with the cleaning brush.



■ Grip the dispensing unit by the sides and pull it down to remove it.




■ Take the dispensing unit apart, separating it into 3 components: the Y-piece, the spouts, and the holder.

#### Cleaning the central spout

Clean the central spout's stainless steel cover by hand only using a mild solution of warm water and liquid dish soap.

■ Clean all parts thoroughly by hand.

**Tip:** With the exception of the stainless steel cover, all parts of the central spout should be cleaned in the dishwasher from time to time to give them a thorough clean. This will remove coffee deposits and milk residues effectively.

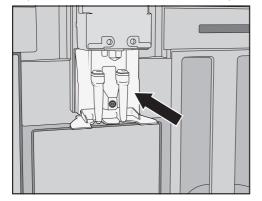


Clean the area around the central spout with a damp cloth.

#### Inserting the central spout

The dispensing unit is easier to reassemble if the individual parts are dampened with water beforehand.

Make sure that all parts are tightly connected to one another.

- Reassemble the dispensing unit.
- Press down firmly so that the spouts become securely connected to the holder.



- Slide the dispensing unit into the coffee machine.
- Connect the milk pipework.
- Reinstall the stainless steel cover.
- Close the appliance door.


Fit cover to main dispenser appears in the display.

■ Confirm with OK.

#### Cleaning the cup rim sensor

Clean the cup rim sensor at least once a week and more often if heavily soiled.

The cup rim sensor is located under the central spout.



Press the two catches together (see arrows).

The cup rim sensor is released.

Clean the cup rim sensor by hand with a mild solution of warm water and liquid dish soap.

**Tip:** To give the cup rim sensor an extra thorough clean, clean it in the dishwasher from time to time.


 To reinstall the cup rim sensor, press it into the holder on the central spout from below.

#### Cleaning the milk flask with lid

The milk flask should be taken apart and cleaned every day after use.


Both the lid and the glass flask can be cleaned in the dishwasher, or by hand using a mild solution of warm water and liquid dish soap.

■ Remove and empty the milk flask.



- Rinse the milk pipework in the lid under running water and then place the milk flask lid in the dishwasher.
- If no water runs out of the connecting piece ①, clean it with the cleaning brush.
- Clean the glass flask.
- Dry all parts and especially the threads on the lid and on the glass with a clean cloth.

■ Reassemble the milk flask.

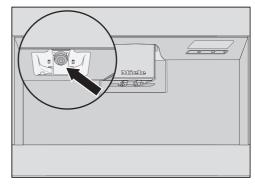


■ Clean the milk flask holder on the coffee machine with a damp cloth.

#### Cleaning the milk valve (daily)


The milk valve seal can be damaged by objects with sharp edges or similar.

Do not use any sharp-edged objects, e.g., knives, to clean the milk valve.

Clean the milk valve every day. If allowed to dry, milk residues can become encrusted on the stainless steel bolt. These crusty deposits are difficult to remove. Therefore, it is important to carry out regular cleaning after preparing milk.

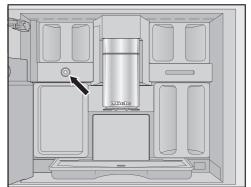

The milk valve is located under the bean container on the left-hand side.

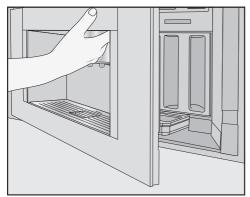

- Open the appliance door.
- Clean the milk valve with a damp cloth/microfiber cloth.
- Close the appliance door.

# Cleaning the milk valve (once a month)


Only remove the milk valve when the coffee machine is switched off. Do **not** switch on the coffee machine while the milk valve is removed.

Remove and clean the milk valve at least once a month. If the following issues occur during milk preparation, the milk valve may be blocked: only hot milk is dispensed instead of milk froth, the milk sprays out. Clean the milk valve more often if necessary.


#### Removing the milk valve

Only remove the milk valve when the coffee machine is switched off. Do **not** switch on the coffee machine while the milk valve is removed.


Switch the coffee machine off.

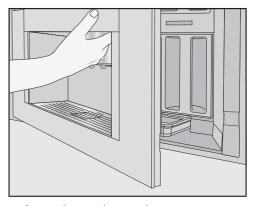

- Open the appliance door.
- Remove the bean container and maintenance container on the lefthand side.
- Remove the central spout's stainless steel cover.




Remove the milk valve cover. Press on the recessed grip to unlock the cover. On the top right-hand side of the cover, you will find a pin for swiveling the cover out.

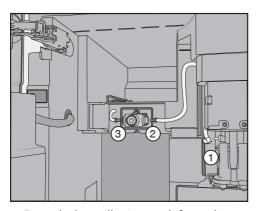


- Detach the milk pipework from the dispensing unit on the central spout ① and from the milk valve silicone seal (② and ③).
- Remove the milk pipework ① connecting the milk valve to the central spout.
- Disconnect the angular molded hose from the round hose.
- Rinse the hoses thoroughly under running water.


Do **not** remove the connecting pieces from the hoses.



Press the catches on the left and right-hand sides of the milk valve holder and pull the holder forward to remove it.



■ Take the holder and silicone seal apart.



Pull the stainless steel bolt upward and out.

#### Cleaning the milk valve

The milk valve cover is not dishwasher-safe.

The milk valve cover may be damaged if cleaned in the dishwasher.

The milk valve cover should only be cleaned **by hand**.

Do **not** switch on the coffee machine while the milk valve is removed.


Clean all parts of the milk valve by hand.

**Tip:** With the exception of the cover, all parts of the milk valve should be cleaned in the dishwasher from time to time to give them a thorough clean. If there are any dry milk residues on the front, soak the stainless steel bolt in a mild solution of warm water and liquid dish soap.


#### Inserting the milk valve

Do **not** switch on the coffee machine while the milk valve is removed.


- Insert the stainless steel bolt from above.
- Insert the silicone seal into the milk valve holder.




■ Insert the holder and silicone seal until they audibly click into place.



- Connect together the angular molded hose and longer milk pipework. Start by attaching the top of the molded hose to the central spout. The black connecting piece should be pointing to the rear.
- Then, connect the bottom end of the molded hose to the dispensing unit.
- Insert the milk pipework into the milk valve on the left and right-hand sides. Push the connecting pieces into the silicone seal as far as they will go.
- Check that the milk pipework is snug against the housing and that the cover can be easily attached.



**Tip:** If necessary, screw the milk pipework backward at the connecting piece on the right-hand side.

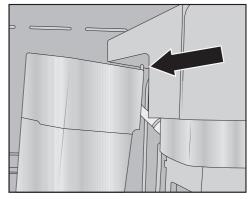

- Attach the milk valve cover as follows: insert the pin in the top right-hand corner and swivel the cover backward until a proper fit is achieved.
- Push the left-hand bean container and maintenance container back into the coffee machine.
- Attach the central spout's stainless steel cover.
- Close the appliance door.

You can now switch the coffee machine back on.

#### Cleaning the bean containers

Risk of damage from incorrect use and cleaning.

Immersing the bean containers in liquids can result in malfunctions. If they are taken apart, bits may break off or the mechanism may no longer work properly once they are reassembled.

Do not disassemble the bean containers.

Do not immerse the bean containers in liquids, e.g., soapy water.

Coffee beans contain oils which can deposit on the walls of the bean containers and hinder the flow of the beans. Therefore, clean the bean containers at least once a month with a soft cloth.


If required, you can clean the lids of the bean containers **by hand** with a mild solution of warm water and liquid dish soap. Dry the lids thoroughly before replacing them on the bean containers.

- Open the appliance door.
- Pull the left and right-hand bean containers out of the coffee machine.

Clean the bean container wells inside the machine.

**Tip:** Use a vacuum cleaner to remove any coffee residues from the interior.

Remove the lids and empty the bean containers.

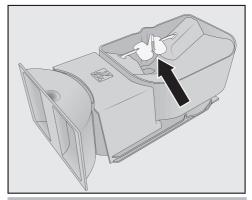


Do not remove the components for improving the flow of the beans (see arrow).

- Clean the bean containers and lids by hand using a slightly damp cloth.
- Dry all parts carefully before filling the bean containers with roasted coffee beans again.
- Replace the lids.
- Push the bean containers back into the coffee machine.
- Close the appliance door.


# Cleaning the interior, inside of the appliance door, and drip tray

Clean the interior and appliance front as part of the normal cleaning process. For instance, if you remove the water container, use this as an opportunity to clean the area under the water container at the same time.

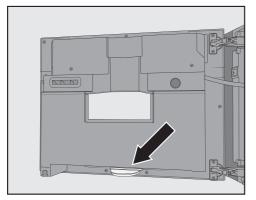

The drip tray is located at the bottom on the inside of the appliance door.

Remove and empty the drip tray on a regular basis. The drip tray is dishwasher-safe.

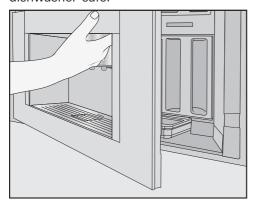

- Open the appliance door.
- Remove and clean the drip tray.
- Remove the following parts from the interior:

- water container
- drip tray
- maintenance container
- brew unit
- bean containers

**Tip:** Use your vacuum cleaner to remove dry ground coffees.

- Clean the interior and the inside of the appliance door by hand with a clean and slightly damp cloth/ microfiber cloth.
- Wipe the interior and appliance door dry using a soft cloth.
- Put all the parts back in place, including the drip tray.
- Close the appliance door.

## Cleaning the appliance front

If soiling is not removed promptly, it could cause the surface to alter or discolor.

Remove any soiling on the appliance front straight away.

Make sure that water cannot get behind the display.

Clean the appliance front after descaling. If possible, wipe up any spillages of descaling agent immediately.

**Tip:** Before cleaning the control panel, open the appliance door. This will prevent accidental operation.

- Clean the appliance front with a clean and slightly damp cloth/microfiber cloth.
- Dry all surfaces with a soft cloth.

**Tip:** You can also use a Miele Microfiber Cloth to clean the front.

#### Maintenance programs

The coffee machine has the following maintenance programs:

- Rinsing the machine
- Rinsing the milk pipework
- Cleaning the milk pipework
- Degreasing the brew unit
- Descaling the machine

Carry out the relevant maintenance program when the prompt to do so appears in the display. You can also start maintenance programs at any time so that the coffee machine does not prompt mandatory cleaning at an inconvenient time.

**Tip:** To save you having to empty the drip tray too often, you can place the maintenance container under the central spout.

#### Opening the Maintenance menu

■ Touch the ③ sensor control.

You can now select a maintenance program.

#### Rinse appliance

If you have made a coffee, the coffee machine will rinse the coffee pipework automatically before switching off. You can also start the Rinse appliance function manually.

#### Rinse milk pipework

If you have made a drink with milk, the coffee machine will rinse the milk pipework automatically after a few minutes. You can also start the Rinse milk pipework function manually.

#### Cleaning the milk pipework

The milk pipework must be cleaned at least once a week.

The Clean milk pipework maintenance program lasts for approx. 15 minutes.

- Touch the ③ sensor control.
- Select Clean milk pipework.
- Confirm with OK.

The process will start and various messages will appear in the display.

■ Follow the instructions on the display.


When Fill the water container with cleaning agent and lukewarm water up to the ///\\
symbol and insert. Close the door. appears in the display, proceed as follows:

For optimum cleaning results, we recommend using the Miele Cleaning Agent for milk pipework.

The powder cleaning agent for milk pipework has been specially developed for use with Miele Coffee Machines and prevents subsequent damage.

You can order the cleaning agent for milk pipework from the Miele online shop, from Miele Customer Service, or from your Miele dealer.

Add 2 sticks of the cleaning agent for milk pipework to the water container.



■ Fill the water container to the ///\\ mark with lukewarm water and stir the solution.

Follow the instructions for the cleaning agent mixing ratio carefully. Fill the water container with the specified amount of water. Otherwise, cleaning will be incomplete.

- Reinsert the water container.
- Close the appliance door.
- Follow the instructions on the display.
- If prompted to do so in the display, rinse the water container thoroughly with clean water. Make sure that no cleaning agent is left in the water container.
- Fill the water container with drinking water.

The cleaning process is complete when the drinks menu appears.

# Degreasing the brew unit and cleaning the interior

Depending on the natural oil content of the coffee used, the brew unit can become blocked quite quickly. The brew unit must be degreased regularly in order to ensure aromatic coffee and trouble-free operation of the coffee machine.

It is recommended to use Miele Cleaning Tablets to clean the brew unit. These have been specially developed for degreasing the brew unit in Miele Coffee Machines and prevent subsequent damage.

The cleaning tablets are available to order from the Miele online shop, from Miele Customer Service, or from your Miele dealer.

After 200 portions have been dispensed, a message prompting you to degrease the brew unit will appear in the display.

■ Confirm the message with OK.

This message will keep being displayed until the brew unit has been degreased.

#### Degreasing the brew unit

- Tap the ③ sensor button.
- Select Degrease the brew unit and tap *OK*.

The maintenance program will then start.

■ Follow the instructions on the display.


Remove the water container and the brew unit. Clean the interior of the machine. Rinse the brew unit by hand and refit it with a cleaning tablet in it. will appear in the display.

#### Cleaning the brew unit and interior


The moving parts of the brew unit are lubricated. Cleaning agents will damage the brew unit.

Only clean the brew unit by hand with warm water. **Do not use any cleaning agents**.


To ensure good tasting coffee and to prevent a build-up of bacteria in the machine, remove and clean the brew unit under running water once a week.

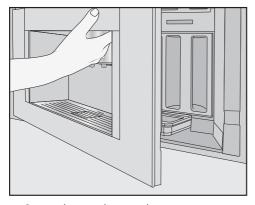

- Open the appliance door.
- Remove the water container.

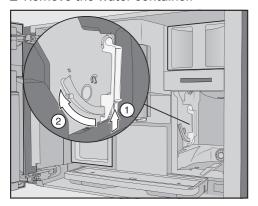

■ Press the button under the handle of the brew unit ① and, while doing so, turn the handle forward ②.

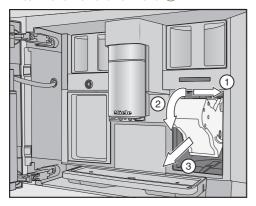


■ Pull the brew unit to the side ① first and then pull out to the front ②. Tilt the brew unit forward ③.

If you cannot remove the brew unit or can only do so with difficulty, the brew unit is not in the correct position (see "Frequently asked questions").

Once you have removed the brew unit, do **not** change the position of the handle on the brew unit.
Otherwise the brew unit cannot be reinserted.

Clean the brew unit by hand under warm running water without using cleaning agent.




■ Wipe any remaining coffee off the two filters. One filter is located in the funnel and the other to the left of the funnel.


The process of removing the brew unit causes ground coffee to drop into the drip tray.

- Remove the drip tray and clean the lid.

# Dropping a cleaning tablet into the brew unit

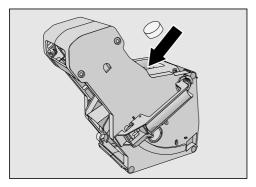

- Drop a cleaning tablet into the top of the brew unit (arrow).
- Push the brew unit containing the cleaning tablet back into the coffee machine.

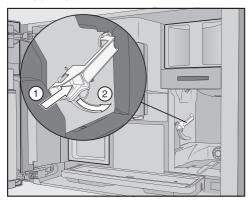

- Press the button under the handle of the brew unit ① and, while doing so, turn the handle backward ②.
- Push the water container and drip tray (plus grounds container) back into the coffee machine.
- Close the machine door.
- Follow the additional instructions given in the display.

The cleaning process is complete when the drinks menu appears.

#### **Descaling the appliance**

Risk of damage from splashes from the descaling solution.

Sensitive surfaces and/or natural floors can suffer damage.

Wipe up any spillages immediately when descaling.

Limescale builds up in the coffee machine through use. How often the machine needs to be descaled will depend on the water hardness level in your area. Limescale must be removed regularly.

The machine will guide you through the descaling process. Various messages will appear in the display, e.g., you will be prompted to empty the drip tray or fill the water container.

Descaling **must be carried out**. The process takes approx. 35 minutes.

The coffee machine prompts you in the display when it needs to be descaled. The remaining number of drinks that can be made before descaling will show in the display after each drink.

■ Confirm the message with *OK*.

When the number of remaining portions reaches 0, the coffee machine will lock.

You can switch the coffee machine off if you do not want to carry out the descaling program at this point. You cannot make any drinks until the machine has been descaled.

# Descaling after prompt appears in the display

Descale the appliance will appear in the display.

■ Confirm the message with *OK*.

The process will start.

Follow the instructions in the display.

When Place 2 descaling tablets in the water container and fill it with lukewarm water up to the descaling symbol  $\Xi$  and insert it. Close the door, appears in the display, proceed as follows.


For optimum descaling results, we recommend using the Miele descaling tablets.

The descaling tablets have been specially developed for Miele coffee machines.

Other descaling agents, which contain other acids besides citric acid and/or other undesirable substances, such as chlorides, may cause damage to the product. Moreover, the descaling result required cannot be guaranteed if the descaling solution was not of the appropriate concentration.

The descaling tablets are available to order from the Miele online shop, from Miele Service, or from your Miele dealer.

You will need 2 descaling tablets.

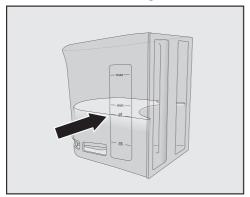

- Fill the water container to the 🕏 mark with lukewarm water.
- Add 2 descaling tablets to the water container.

Follow the instructions for the mixing ratio carefully. Fill the water container with the specified amount of water. Otherwise, descaling will be incomplete.

#### Carrying out descaling

- Reinsert the water container.
- Follow the additional instructions given in the display.

When Fill the water container up to the symbol and insert. Close the door, appears in the display:

■ Remove the water container and rinse it thoroughly with clean water. Ensure that **no** descaling solution residue remains in the water container. Fill the water container with tap water.

The descaling process is complete when the drinks menu appears.

Many malfunctions and faults that can occur in daily operation can be easily remedied. You can save time and money in many cases, as you do not need to contact Miele Customer Service.

Information to help you rectify faults yourself can be found at www.miele.com/service.

The following tables are designed to help you to find the cause of a malfunction or a fault and to resolve it.

#### Messages in the display

Error messages must be confirmed with OK, otherwise the message may reappear in the display even though the problem has been remedied.

To address the fault, follow the instructions on the display.

If the error message appears in the display again, contact Miele Technical Service.

Problem	Possible cause and solution
F1, F2, F80, F82 F353, F354	There is an internal fault.  Switch the coffee machine off. Wait for approximately 1 hour before switching the machine back on again.
F74, F77 F225, F226 F235, F353, F354	There is an internal fault.  Switch the coffee machine off. Wait for approximately 2 minutes before switching the machine back on again.

Problem	Possible cause and solution
F73 or Check the brew unit	The brew unit cannot be positioned correctly or is soiled. It is not possible to press the ground coffee.  Check whether you can remove the brew unit.  If you can remove the brew unit, rinse it under running water.
	<ul> <li>Push the coffee ejector of the brew unit into the correct position (see image).</li> <li>Replace the water container in the coffee machine and close the door. Do not insert the brew unit.</li> <li>Switch the coffee machine on.</li> </ul>
	This will initialize the brew unit motor and put it back into the start position.  When Insert the brew unit appears in the display, put the brew unit back in the coffee machine. Close the machine door.
	<ul> <li>If you cannot remove the brew unit, switch the coffee machine off. Wait for approximately 2 minutes before switching the machine back on again.</li> </ul>

Problem	Possible cause and solution
F233	The cup-rim sensor is not inserted or is incorrectly inserted.
	If the central spout is moving upward and the cup-rim sensor is bumped, e.g., with a cup, the cup-rim sensor loses its reference position.  ■ Confirm the message with <i>OK</i> .  ■ Reinstall the cup-rim sensor.
	Cup-rim detection remains inactive and the central spout stays in the top position until the coffee machine is next switched on. Cup-rim detection is reinitialized during the next switch-on operation.
F 307 or Remove the milk valve and clean it	The milk valve is faulty.  ■ Remove and clean the milk valve (see "Cleaning and care — Removing and cleaning the milk valve").

# Unusual performance of the coffee system

Problem	Possible cause and solution
The display remains dark when the coffee machine is turned on using the On/Off button ①.	The On/Off button ① was not held for long enough.  ■ Tap and hold the On/Off button ① for at least 3 seconds.
	The plug is not properly plugged into the electrical socket.  Insert the plug into the electrical socket.
	The fuse has tripped because the coffee machine, voltage, or another appliance is defective.  Remove the plug from the socket.  Contact a qualified electrician or Technical Service.
The lighting remains off after the coffee machine has been switched on.	The lighting has been switched off.  ■ Switch the lighting on (see "Lighting" in the "Settings" chapter).
	The lighting is faulty. ■ Contact Technical Service.
The coffee machine does not respond to operation via the display.	There is a fault. ■ Tap and hold the On/Off button ① until the display switches off and the machine restarts.

Problem	Possible cause and solution
The coffee machine turns off suddenly.	The factory-set switch-off time (20 minutes) or the switch-off time you have programmed has been reached.  If required, you can select a new switch-off time (see "Settings — Timer").
	The plug is not properly plugged into the electrical socket.  Insert the plug into the electrical socket.
The sensor buttons do not respond. The coffee machine can no longer be operated.	There is an internal fault.  Disconnect the coffee machine from the electricity supply by removing the plug from the socket or switching off the breaker.
A fan can be heard even though no drinks are be- ing prepared and the coffee machine is switched off.	This is not a fault. Once a drink has been dispensed or the machine has been switched off, the internal fan will continue to run until the interior is sufficiently dehumidified.
The brew unit cannot be removed.	<ul> <li>The brew unit is not positioned correctly.</li> <li>■ If necessary, turn the handle on the brew unit back to the start position. Close the machine door.</li> <li>■ Switch the coffee machine off.</li> <li>■ Wait approx. 1 minute before switching the coffee machine back on.</li> <li>This will initialize the brew unit motor and put it back into the start position.</li> <li>■ If necessary, repeat these steps.</li> </ul>
Drink dispensing is pre- maturely aborted even though there is a con- tainer under the central spout.	This is not a fault.  If the container has a very wide opening that prevents the cup-rim sensor from making contact with the edge of the container (e.g., in the case of a very large cup), the drink will be canceled. Use a different container or position the existing one so that the sensor can detect the rim.

Problem	Possible cause and solution
Coffee dispensing is repeatedly interrupted and the message Fill the bean container appears in the display.	This is not a fault.  The brew unit has not detected the ground coffee. Certain types of coffee produce a small amount of coffee when they are ground. Usually the grinder is set too fine and the amount is set to minimum.  ■ Confirm the message with <i>OK</i> .  If the display appears with all types of coffee:  ■ Set the grinder to a coarser setting (see "Grinder setting").  ■ Select a larger amount of coffee.  Don't forget to check any drinks changed in "User profiles".
	If the message only appears when dispensing certain drinks:  Check the amount of coffee set for this drink (see "Amount of coffee"). Select a larger amount of coffee.  You may also need to set a coarser grinder setting.
Steam is dispensed instead of water while preparing hot water or making tea.	It is likely that the wrong altitude has been set.  ■ Change the altitude settings (Settings  I Altitude).  ■ If necessary, you can also change the temperature settings for the drinks (Parameters).
The display is hard to see or not legible.	The display brightness has been set too low. ■ Change this setting (see "Settings").
The display lights up but the coffee machine does not heat up and no drinks are made.	The Demo mode for demonstrating the coffee machine in stores and showrooms has been activated.  ■ Deactivate Demo mode (see "Settings").

# **Unsatisfactory results**

Problem	Possible cause and solution
The coffee is not hot enough.	The cup has not been pre-heated.  The smaller the cup and the thicker its walls, the more important it is to pre-heat it.  Pre-heat the cup with hot water, for example.
	The brewing temperature is set too low. ■ Set a higher brewing temperature.
	The filters in the brew unit are blocked.  Remove the brew unit and clean it by hand.  Degrease the brew unit.
The coffee grinder makes a louder noise than usual.	The coffee bean container has become empty during the grinding process.  Fill the coffee bean container with fresh beans.
	There may be foreign objects such as plastic or stones in amongst the coffee beans.  Switch the coffee machine off immediately. Contact the Technical Service department.
The coffee is dispensed too slowly into the cup.	The brew unit is blocked.  ■ Degrease the brew unit (see "Cleaning and care — Degreasing the brew unit and cleaning the interior").
The crema on the coffee or espresso is not as it should be.	The coffee beans are no longer fresh. If roasted coffee beans are stored open for too long, the carbon dioxide gradually escapes from the coffee beans. The crema is no longer formed during dispensing. Of course, you can still use the coffee beans.

Problem	Possible cause and solution
The coffee tastes weak. The coffee grounds in the grounds container are sludgy and grainy.	Less coffee is being brewed because insufficient coffee beans are getting into the grinder. Have you used a dark roast? This type of coffee bean is often oily. These oils can cling to the walls of the coffee bean containers and hinder the flow of beans. Are you using a type of coffee with very large beans or different sized beans? The beans are possibly getting wedged or jammed and forming "bean bridges".  Clean the coffee bean containers more often if you are using darker, more oily coffee beans.  If you are using a type of coffee with very large beans or different sized beans, pull the bean containers out slightly and give them a shake.  If necessary, try using a different type of coffee.
Coffee is not being dispensed from both dispensers evenly. Milk may be sputtering when being heated up.	Coffee deposits in the central spout prevent the dispensing of the drinks.  Take the central spout apart and wash all the components — with the exception of the stainless steel cover — in the dishwasher.  This cleaning operation should be performed once a week.
The consistency of the milk froth is unsatisfactory.	The milk temperature is too high. Good milk froth can only be achieved when cold milk (below 50°F/10°C) is used.  Check the temperature of the milk in the milk flask.  The milk pipework is blocked and/or the milk valve is soiled.  Remove and clean the milk valve.

## Service and warranty

Information to help you rectify faults yourself and about Miele spare parts can be found at www.miele.com/


#### Contact in the event of a fault

In the event of a fault which you cannot remedy yourself, please contact your Miele dealer or Miele Customer Service.

You can book a Miele Service Call online at www.miele.com/service.

Contact information for Miele Customer Service can be found at the end of this document.

Please quote the model identifier and serial number of your appliance (SN) when contacting Miele Customer Service. Both pieces of information can be found on the data plate.

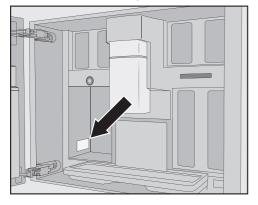

# Appliance warranty and product registration

You can register your product and/or view the manufacturer's warranty terms and conditions for Miele appliances and vacuum cleaners at www.mieleusa.com.

## **Accessories**

These products and other useful accessories can be ordered via the Miele Webstore, from Miele Service or from your Miele dealer.

- Cleaning agent for milk pipework for cleaning the milk system
- CJ Jug 1.0 L Insulated flask for coffee or tea (pot function)
- Miele Black Edition One for all perfect for making espresso, café crema, and speciality coffee with milk
- Miele Black Edition Espresso
   Whole coffee beans perfect for making espresso
- Miele Black Edition Café Crema Whole coffee beans – perfect for making coffee
- Miele Black Edition Decaf
   Whole coffee beans perfect for making decaffeinated coffee specialties

## Caring for the environment

### Disposal of the packing material

The cardboard box and packing materials protect the appliance during shipping. They have been designed to be biodegradable and recyclable.

Ensure that any plastic wrappings, bags, etc. are disposed of safely and kept out of the reach of children. Danger of suffocation!

#### Disposal of your old appliance

Electrical and electronic appliances contain valuable materials. They also contain certain substances, compounds and components which were essential for the proper functioning and safe use of the equipment. Handling these materials improperly by disposing of them in your household waste can be harmful to your health and the environment. Therefore, please do not dispose of your old appliance with regular household waste and follow local regulations on proper disposal.



Consult with local authorities, dealers or Miele in order to dispose of and recycle electrical and electronic appliances. Miele assumes no responsibility for deleting any personal data left on the appliance being disposed. Please ensure that your old appliance is kept away from children until removal. Observe safety requirements for appliances that may tip over or pose an entrapment hazard.

#### Installation

#### **Electrical connection**

Before connecting the coffee machine, make sure that the connection data on the data plate (voltage and frequency) matches the electrical supply. This data must match to avoid the risk of damage to the coffee machine. If in any doubt, consult a qualified electrician.

The necessary connection data is given on the data plate inside your appliance.

The fuse rating must be at least 10 A. If possible, the socket should remain easily accessible. If the socket is no longer accessible after installation, an additional means of disconnection must be provided for all poles. Suitable means of disconnection include switches with an all-pole contact gap of at least 1/8" (3 mm).

Temporary or permanent operation on an autonomous power supply system or a power supply system that is not synchronized with the grid power supply (e.g., island networks, backup systems) is possible. A prerequisite for operation is that the power supply system complies with local regulations and standards.

The function and operation of the protective measures provided in the domestic electrical installation and in this Miele product must also be maintained in isolated operation or in operation that is not synchronized with the grid power supply, or these measures must be replaced by equivalent measures in the installation.

As described, for example, in the current version of VDF-AR-F 2510-2.

The coffee machine must not be used with **energy saving plugs**. These reduce the energy supply to the machine, which could generate excessive heat.

#### Installation dimensions


#### Installation in a tall cabinet

Observe the required minimum installation height of 33 7/16" (850 mm).

Your coffee machine can be installed flush or proud. Discuss your requirements with your architect, kitchen designer, and installer.


More installation drawings are available on the Miele homepage.

Combination with other Miele built-in appliances is possible. If the coffee machine is to be built in above another appliance, there must be a full-width, closed shelf between them. If the appliance is to be combined with a Gourmet warming drawer/built-in vacuum drawer, no shelf is required in between.

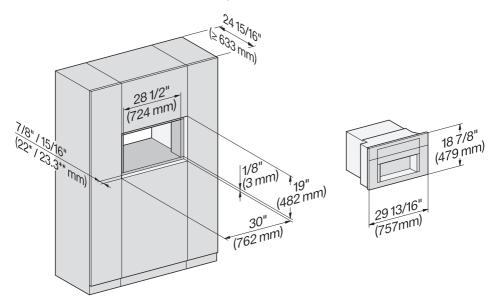

## Installation

#### Installation and connections

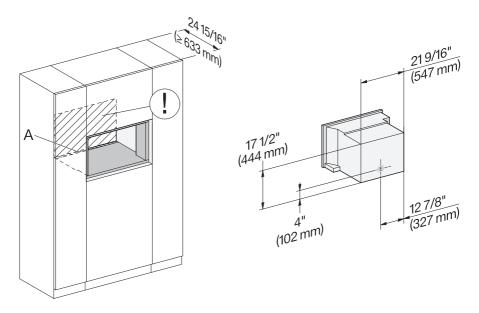

- A Cut-out (at least 20"/508 mm wide) in the base of the tall cabinet for power cord and ventilation
- **E** Electrical connection
- ① No electrical connection in this area

### **Building in the coffee machine**

Danger of injury due to incorrect operation.

A machine that has not been built in is not safe and can cause injuries.

Do not operate the coffee machine unless it has been built in.

Danger of damage due to incorrect operation.

If the ambient temperature range is not observed, the coffee machine can not function properly.

The coffee machine may only be operated within an ambient temperature range of +60°F to +100°F (+16°C to +38°C).

Maintain the required minimum installation height of 33 7/16" (850 mm).

Risk of damage and injury from the coffee machine tipping over. If the coffee machine is not yet screwed to the cabinet, the appliance may tip forward when the appliance door is open.

Make sure that a second person fully secures the coffee machine during installation.

First screw the top-left screw to the cabinet.

Risk of damage due to the use of an electric screwdriver.

If the coffee machine is secured with an electric screwdriver, e.g., cordless screwdriver, the chuck may damage the appliance door and/or the interior.

Only use a manual screwdriver to secure the coffee machine in the cabinet.

To install the machine, you will need a TX 20 screwdriver.


#### Connecting the electricity supply

Observe the information under "Electrical connection".

■ Connect the coffee machine to the electricity supply.

**Tip:** It is useful to have a place to sit the coffee machine which is the same height as the building-in niche. This makes electrical connection easier.

#### Removing transport restraints

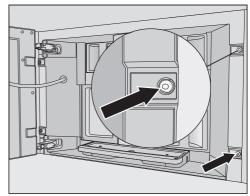

2 screw holes are fitted with red silicone plugs to protect the appliance against transport damage and secure the door during transport.

#### Installation

Remove the plugs **before** screwing the coffee machine to the cabinet unit

■ Pull firmly on the red silicone plugs to remove them from the screw holes.

The plugs are not required for any other purpose. Dispose of them with your household waste.

## Pushing in and aligning the coffee machine

Take care not to trap or damage the electrical connection when pushing the machine into the niche.

- Push the coffee machine all the way into the niche until you feel a resistance.
- Check the height of the coffee machine to make sure that it is sitting centrally in the niche and that it is level. Align the machine.

Never align the coffee machine by adjusting the door hinges. This will prevent the milk flask from attaching correctly and interfere with the milk-preparation process.

## Screwing the coffee machine to the cabinet

Open the appliance door.

Four TX20 (25 mm) screws are supplied with the machine.

- Secure the coffee machine to the side walls of the cabinet using the screws supplied. Start with the top-left screw. Proceed in a clockwise direction to tighten the other screws. Tighten all screws by hand.
- Carry out a functional check on the coffee machine.

## **FCC Declaration of Conformity**

Electricity consumption in standby:	< 0.6 W
Electricity consumption in networked standby:	< 0.9 W
Frequency range	2.412 GHz – 2.462 GHz
Maximum transmitting power	< 100 mW



al3491

#### Wi-Fi module EK037

Contains FCC ID: 2ACUWEK037 Contains IC: 5669C-EK037

This device complies with Part 15 of the FCC Rules and with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 8" (20 cm) between the radiator and your body. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

#### **Industry Canada Statement**

This digital apparatus does not exceed the Class B limits for Radio Noise Emissions from digital apparatus set out in the Radio Interference Regulations of the Canadian Department of Communications.

Complies with Canadian ICES-003 Class B specifications.

Please have the model and serial number of your appliance available when contacting Customer Service.

#### U.S.A.

Miele, Inc.

#### **National Headquarters**

9 Independence Way Princeton, NJ 08540 www.mieleusa.com

#### **Customer Support**

Phone: 888-99-MIELE (64353) info@mieleusa.com

#### **International Headquarters**

Miele & Cie. KG Carl-Miele-Straße 29 33332 Gütersloh Germany

#### Canada

Importer
Miele Limited

#### **Headquarters and Miele Centre**

161 Four Valley Drive Vaughan, ON L4K 4V8 www.miele.ca

#### **Customer Care Centre**

Phone: 1-800-565-6435 905-532-2272 customercare@miele.ca



CVA 7370