

PT 8507 [PTM EL BSS ARP]

Vented dryer, electric heating

With individually programmable controls for the maximum in flexibility.



- Drum volume 17.66 (500.00) ft³ (I) l, load size 20.0-25.0 kg
- Unique, gentle fabric care honeycomb drum
- Greatest energy efficiency thanks to Air Recycling Plus
- Precision drying of all fabrics –
 PerfectDry
- Simple operation easy to clean large fluff filter


EAN: 4002515480960 / Material number: 09906730 / Old Material Number: 52850705USA

Construction type and design	
Construction type and design	Front loodor
Construction type Product line	Front loader Professional
Front	Stainless steel
Load in lbs. (kg)	20.0-25.0
Load ratio	
Drum volume in I	17.66 (500.00) ft ³ (l)
Drying system	Vented system
Door opening [Ø] in in. (mm)	20 1/2 (520)
Door-opening angle in degrees	180
Door hinging	left
Convertible hinging	•
Stainless steel honeycomb drum	Yes
Application	
Suitable for hotels and restaurants	•
Suitable for retirement and care homes	•
Suitable for facility management	•
Suitable for dry cleaners	•
Suitable for commercial laundromats	•
Suitable for fire departments and rescue services	•
Suitable for stud farms and stables	•
Suitable for universities, schools, and kindergartens	•
Suitable for hospitals	•
Suitable for sports clubs	•
Suitable for beauty salons, spas, and fitness centres	•
Performance data	
Maximum evaporation capacity in I/hour	27 (27) gal (US)/min (I)
Program duration in minutes	24
Tested operating hours	20000
Controls	
Control type	Profitronic M
Programmability	Freely programmable
Program controls	Residual moisture controlled
Max. delay start in h	Can be selected freely
Time left display	•
Program sequence indicator	•
Choice of display language	•
Standard / target grp programs	
Basic programs	•
Programs for hotels and restaurants	•
Programs for retirement and care homes	•
Programs for facility management	•
Programs for dry cleaners	•
Programs for fire departments and rescue services	•
Programs for stud farms / riding schools / stables	•
Standard electrical connection	
Heating type	Electric
Electrical connection	3 AC 220-240V 60HZ
Electric heater rating in kW	24.70-29.40



PT 8507 [PTM EL BSS ARP]

Vented dryer, electric heating With individually programmable controls for the maximum in flexibility.

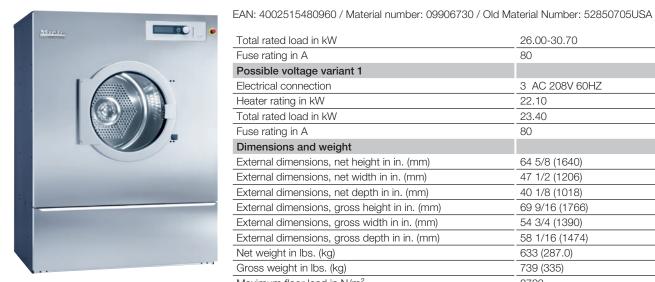

Total rated load in kW	26.00-30.70
Fuse rating in A	80
Possible voltage variant 1	
Electrical connection	3 AC 208V 60HZ
Heater rating in kW	22.10
Total rated load in kW	23.40
Fuse rating in A	
Dimensions and weight	
External dimensions, net height in in. (mm)	64 5/8 (1640)
External dimensions, net width in in. (mm)	47 1/2 (1206)
External dimensions, net depth in in. (mm)	40 1/8 (1018)
External dimensions, gross height in in. (mm)	69 9/16 (1766)
External dimensions, gross width in in. (mm)	54 3/4 (1390)
External dimensions, gross depth in in. (mm)	58 1/16 (1474)
Net weight in lbs. (kg)	633 (287.0)
Gross weight in lbs. (kg)	739 (335)
Maximum floor load in N/m ²	2703
Emission values	2.00
Emission sound pressure level in the workplace	<70 dB(A) re 20 µPa
Heat dissipation into the room in MJ/h	3.25
Features	0.20
Intelligent drum reversal	•
Axial airflow	•
Large-surface lint filter	•
PerfectDry	•
SoftLift drum ribs	•
AirRecyclingPlus	•
Low temperature function	•
Communication slot	•
Emergency shut-off	
Machine-independent accessories	-
Connection options	-
Payment system (optional)	•
RS 232 serial interface (optional)	•
Optical interface for service access	
Peak-load negotiation / energy management	<u>•</u>
Operating data logging	_
Capacities	-
Breathing masks [number]	12
Protective suits [number]	3-4
Protective coats [number]	5
Synthetic duvets [number]	2
Synthetic pillows [number]	5
Down comforters [number]	
Down comforters [number] Down pillows [number]	25
Cleaning cloths, 22 g [number]	460
Cotton mops, 40 cm [number]	105
Cotton mops, 50 cm [number]	91
Microfibre mops, 40 cm [number]	167
Microfibre mops, 50 cm [number]	118
Horse summer blankets [number]	3
Standards / certs / symbols	
	•



PT 8507 [PTM EL BSS ARP]

Vented dryer, electric heating With individually programmable controls for the maximum in flexibility.