

DA 2390

Extractor unit

with energy-efficient LED lighting and light-touch switches for easy use.



- Customised kitchen design – fully integrated in 884 mm width
- Space saving – suitable for narrow wall units over 30 cm deep
- Powerful – 600 m³/h in Booster level
- Efficient filtration- 10-ply stainless-steel grease filter
- Safe and easy to clean – Miele CleanCover

EAN: 4002515778302 / Material number: 10451560 / Old Material Number: 28239055D

Construction type	
Integrated extractor	•
Operating modes	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151
Active charcoal filter (order separately)	DKF 19-P
Design	
Colour	Stainless steel
User convenience	
Electronic controls	•
Power levels (number without Booster level)	3
Easy-to-clean canopy interior – CleanCover	•
Efficiency and sustainability	
Annual energy consumption in kWh/year	55,3
Energy efficiency class (A+++ – D)	A
Annual energy consumption in kWh/year	55,3
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	A
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	2
Lighting	
LED	•
Number x W	4 x 3 W
Light intensity in lx	500 lx
Colour temperature in K	3000 Kelvin
Fan	
Dual-action fan	•
AC motor	•
Exhaust air	
Air throughput in Level 1 (m ³ /h) according to EN 61591	250
Air throughput in Level 2 (m ³ /h) according to EN 61591	300
Air throughput in Level 3 (m ³ /h) according to EN 61591	360
Air throughput in Booster level (m ³ /h) according to EN 61591	600
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	47,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	48,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	52,0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	64,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	31,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	34,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	38,0
Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	50,0

DA 2390

Extractor unit

with energy-efficient LED lighting and light-touch switches for easy use.




EAN: 4002515778302 / Material number: 10451560 / Old Material Number: 28239055D

Recirculation	
Air throughput in Level 1 (m ³ /h) according to EN 61591	190
Air throughput in Level 2 (m ³ /h) according to EN 61591	250
Air throughput in Level 3 (m ³ /h) according to EN 61591	320
Air throughput in Booster level 1 (m ³ /h) according to EN 61591	500
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	54,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	60,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	64,0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	72,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	39,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	45,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	49,0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	57,0
Safety	
Safety switch-off	•
Technical data	
Canopy width in mm	884
Canopy height in mm	63
Canopy depth in mm	297
Minimum height above electric hobs in mm	450
Net weight in kg	13,0
Length of supply lead in m	1,5
Standard plug fitted	•
Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Total rated load in kW	0,23
Voltage in V	230
Fuse rating in A	10
Number of phases	1
Frequency in Hz	50
Installation notes	
Extraction ducting connection at top	•
Extraction connection at top and rear	•
Diameter of exhaust duct in mm	150
Accessories included	
Non-return flap	•
Optional accessories	
Active charcoal filter	Nein

DA 2390

Extractor unit

with energy-efficient LED lighting and light-touch switches for easy use.

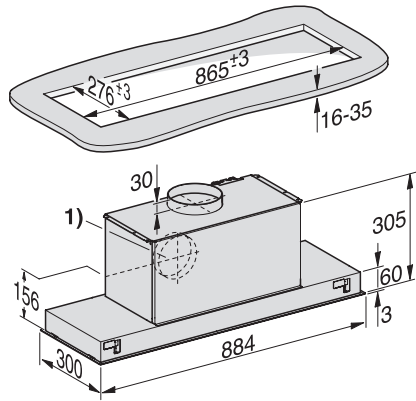

DA2390 (Installation drawing)

The cooker bonnet is fixed in the cut-out with the help of clamps. This requires a solid construction of the installation surface, e.g. made of wood. Make sure that the construction has sufficient load-bearing capacity. In the area of the clamps, components such as struts or pipes must have a distance of at least 25 mm from the cut-out.,
1) Vent connection alternatively to rear