

DA 6698 D Puristic Version 6000

Island cooker hood

with energy-efficient LED lighting and touch controls for simple operation.



- Family design – based on Miele built-in appliances
- Unique user convenience – Con@ctivity
- Powerful – 730 m³/h on the booster setting
- Energy-efficient and quiet – powerful ECO motor
- Pleasantly quiet – Miele Silence package

EAN: 4002515937006 / Material number: 10750490 / Old Material Number: 28669855D

Construction type	
Island cooker hood	•
Operating modes	
Type of air guide	Convertible
Recirculation conversion kit (order separately)	DUI 32
Active charcoal filter (order separately)	DKF12-1
Design	
Colour	Stainless steel
Variable height available as customisation on request	•
User convenience	
Miele@home	•
Automatic function Con@ctivity 3.0 (WiFi)	•
Electronic controls	•
Power levels (number without Booster level)	3
Touch controls	•
Miele@mobile app	•
Programmable Booster level switch-off	•
Run-on time 5/15 min.	•
Grease filter saturation indicator	•
Grease filter saturation indicator programmable	•
Active charcoal filter saturation indicator programmable	•
Silence package	•
Efficiency and sustainability	
Energy efficiency class (A+++ to D)	A++
Annual energy consumption in kWh/year	32,1
PowerManagement system	•
Annual energy consumption in kWh/year	32,1
ECO motor	•
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	A
Cleaning convenience	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	3
Lighting	
LED	•
Number x W	4 x 3 W
Light intensity in Lx	820 lx
Colour temperature in K	3500 Kelvin
Dimmer function	•
Blower	
Dual-action fan	•
DC motor	•
Extraction	
Air throughput in Level 1 (m ³ /h) according to EN 61591	200
Air throughput in Level 2 (m ³ /h) according to EN 61591	320
Air throughput in Level 3 (m ³ /h) according to EN 61591	450

DA 6698 D Puristic Version 6000

Island cooker hood

with energy-efficient LED lighting and touch controls for simple operation.



EAN: 4002515937006 / Material number: 10750490 / Old Material Number: 28669855D

Air throughput in Booster level (m ³ /h) according to EN 61591	730
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	35,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	44,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	53,0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	65,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	20,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	29,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	38,0
Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	50,0
Recirculation	
Air throughput in Level 1 (m ³ /h) according to EN 61591	115
Air throughput in Level 2 (m ³ /h) according to EN 61591	210
Air throughput in Level 3 (m ³ /h) according to EN 61591	330
Air throughput in Booster level (m ³ /h) according to EN 61591	480
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	45,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	55,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	64,0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	73,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	30,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	40,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	49,0
Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	58,0
Safety	
Safety switch-off	•
Single-ply safety glass (ESG)	•
Technical data	
Canopy width in mm	898
Overall height for vented and external in in. (mm)	705
Overall height for extraction mode and external mode cooker hoods in mm	1005
Canopy height in mm	85
Overall height for recirculation in in. (mm)	765
Canopy depth in mm	598
Overall height for recirculation mode cooker hoods in mm	1075
Minimum height above electric hobs in mm	450

DA 6698 D Puristic Version 6000

Island cooker hood

with energy-efficient LED lighting and touch controls for simple operation.




EAN: 4002515937006 / Material number: 10750490 / Old Material Number: 28669855D

Minimum height above gas hobs (max. 12.6 kW total power, burner \leq 4.5 kW) in mm	650
Net weight in kg	35,0
Length of supply lead in m	0,0
Hard-wired connection	•
Total rated load in kW	0,11
Voltage in V	230
Fuse rating in A	10
Number of phases	1
Frequency in Hz	50
Installation notes	
Extraction ducting connection at top	•
Diameter of exhaust duct in mm	150
Telescopic chimney	•
Combination with WiFi-enabled Miele hob	recommended
Accessories supplied	
Non-return flap	•
Optional accessories	
Active charcoal filter	Nein
Active charcoal filter, can be reactivated	DKF 12-R

DA 6698 D Puristic Version 6000

Island cooker hood

with energy-efficient LED lighting and touch controls for simple operation.

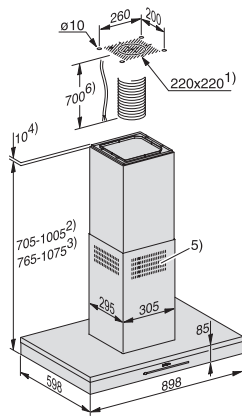

DA 6698 D, CLST (Installation drawing)

1) Extraction cut-out, 2) Extraction, 3) Recirculation, 4) Installation option with spacer frame, 5) Ventilation grille at the top for recirculation, 6) A mains cable and, for extraction mode, flexible exhaust ducting is required from the ceiling connection to the connection on the cooker hood., ,