

DA 4208 V D Puristic Varia

Island cooker hood

with energy-efficient LED lighting and light-touch switches for easy use.



- Timeless design – stainless steel canopy 898 mm wide
- Unique user convenience – Con@ctivity
- Always at the right height – motorised height adjustment
- Powerful – 675 m³/h in Booster level
- Pleasantly quiet – Miele Silence package

EAN: 4002515947104 / Material number: 10767330 / Old Material Number: 28420855D

Construction type	
Island cooker hood	•
Operating modes	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUI 32
Active charcoal filter (order separately)	DKF 12-P
Design	
Colour	Stainless steel
User convenience	
Miele@home	•
Automatic function Con@ctivity	•
Electronic controls	•
Power levels (number without Booster level)	3
Miele@mobile app	•
Programmable Booster level switch-off	•
Run-on time 5/15 min.	•
Grease filter saturation indicator	•
Grease filter saturation indicator programmable	•
Active charcoal filter saturation indicator programmable	•
Silence package	•
Motor-operated cooker hoods	•
Easy-to-clean canopy interior – CleanCover	•
Efficiency and sustainability	
Annual energy consumption in kWh/year	30,8
Energy efficiency class (A+++ – D)	A+
Fluid dynamic efficiency class	A
Lighting efficiency class	A
ECO motor	•
Grease filtering efficiency class	A
PowerManagement system	•
Annual energy consumption in kWh/year	30,8
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	A
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	3
Lighting	
LED	•
Number x W	4 x 3 W
Light intensity in lx	820 lx
Colour temperature in K	3500 Kelvin
Dimmer function	•
Fan	
Dual-action fan	•
DC motor	•
Exhaust air	
Air throughput in Level 1 (m ³ /h) according to EN 61591	180
Air throughput in Level 2 (m ³ /h) according to EN 61591	290
Air throughput in Level 3 (m ³ /h) according to EN 61591	420

DA 4208 V D Puristic Varia

Island cooker hood

with energy-efficient LED lighting and light-touch switches for easy use.



EAN: 4002515947104 / Material number: 10767330 / Old Material Number: 28420855D

Air throughput in Booster level (m³/h) according to EN 61591	675
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	39,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	49,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	58,0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	70,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	24,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	34,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	43,0
Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	55,0
Recirculation	
Air throughput in Level 1 (m³/h) according to EN 61591	100
Air throughput in Level 2 (m³/h) according to EN 61591	180
Air throughput in Level 3 (m³/h) according to EN 61591	290
Air throughput in Booster level 1 (m³/h) according to EN 61591	400
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	45,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	55,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	64,0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	73,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	30,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	40,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	49,0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	58,0
Safety	
Safety switch-off	•
Technical data	
Overall height for vented and external in in. (mm)	755
Canopy width in mm	898
Overall height for extraction mode and external mode cooker hoods in mm	1045
Canopy height in mm	70
Overall height for recirculation in in. (mm)	755
Canopy depth in mm	598
Overall height for recirculation mode cooker hoods in mm	1045
Minimum height above electric hobs in mm	450
Net weight in kg	37,0
Hard-wired connection	•

DA 4208 V D Puristic Varia

Island cooker hood

with energy-efficient LED lighting and light-touch switches for easy use.




EAN: 4002515947104 / Material number: 10767330 / Old Material Number: 28420855D

Minimum safety distance above gas hobs (max. 12.6 kW total power, burner \leq 4.5 kW) in mm	650
Total rated load in kW	0,29
Voltage in V	230
Fuse rating in A	10
Number of phases	1
Frequency in Hz	50
Installation notes	
Extraction ducting connection at top	•
Diameter of exhaust duct in mm	150
Telescopic chimney	•
Combination with WiFi-enabled Miele hob	recommended
Accessories included	
Non-return flap	•
Optional accessories	
Active charcoal filter	Nein
Active charcoal filter, can be reactivated	DKF 12-R

DA 4208 V D Puristic Varia


Island cooker hood

with energy-efficient LED lighting and light-touch switches for easy use.

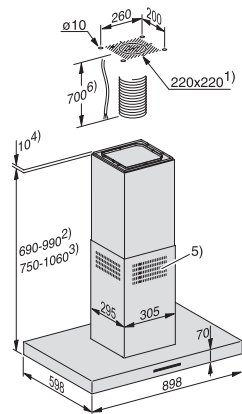

DA 410-6, DA 4208 D, DA 4208 D EXTA, DA 6396 D, DA 6596 D, PUR 98 D (Installation drawing)

1) Installation area/site, 2) Vented, 3) Recirculation, 4) Installation alternatively with spacer frame, 5) Ventilation grille positioned at the top for recirculation, 6) A supply lead, and for vented mode flexible vent ducting, must be pre-fitted for the connection in the ceiling to the connection of the cooker hood.

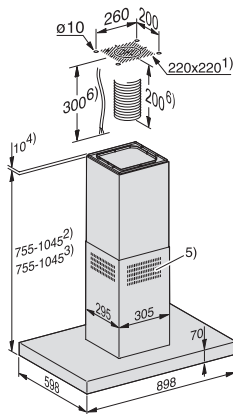

DA 420 V-6, DA 4208 VD (Installation drawing)

1) Installation area/site, 2) Vented, 3) Recirculation, 4) Installation alternatively with spacer frame, 5) Ventilation grille positioned at the top for recirculation, 6) A supply lead, and for vented mode flexible vent ducting, must be pre-fitted for the connection in the ceiling to the connection of the cooker hood.