

CS 7152 FL SmartLine element with two burners




- Simple controls -single-handed operation via rotary dial control
- Elegant design for flush or raised installation
- Seamlessly integrates with any SmartLine element
- Particularly versatile 1 medium burner and 1 large burner
- Easy cleaning dishwasher-safe ComfortClean pot rests

EAN: 4002516612193 / Material number: 12106160 / Old Material Number: 27715250HK

Heating type	
Heating type	Gas
Construction type	
SmartLine	•
Design	
Elegant glass ceramic surface	<u>•</u>
Flush	•
Ceramic surface colour	Black
Surface-mounted installation	•
Cooking zone details	
Number of cooking zones	2
1st cooking zone/cooking area	
Position	front centre
Type	Standard burner
Size in mm	Ø 120-240
Max. rating in W	1900
2nd cooking zone/cooking area	
Position	rear centre
Type	High-speed burner
Size in mm	Ø 140-260
Max. rating in W	3200
User convenience	
Operation via sensor controls	Knob
Operation via knobs	•
Electronic ignition with single-hand operation	•
Cleaning and care	
Easy to clean ceramic glass	•
Dishwasher-proof pot rests	•
Safety	
GasStop	•
Technical data	
Technical data Dimensions (H x W x D) in mm	92 x 288 x 520
Dimensions (H x W x D) in mm	92 x 288 x 520 288
Dimensions (H x W x D) in mm Dimensions in mm (width)	288
Dimensions (H x W x D) in mm Dimensions in mm (width) Dimensions in mm (height)	288 92
Dimensions (H x W x D) in mm Dimensions in mm (width) Dimensions in mm (height) Dimensions in mm (depth)	288 92 520
Dimensions (H x W x D) in mm Dimensions in mm (width) Dimensions in mm (height) Dimensions in mm (depth) Cut-out dimensions (W x D) with flush-fit installation in mm	288 92 520 268/292 x 500/524
Dimensions (H x W x D) in mm Dimensions in mm (width) Dimensions in mm (height) Dimensions in mm (depth) Cut-out dimensions (W x D) with flush-fit installation in mm Cutout dimensions in mm (width) with surface-mounted installation	288 92 520
Dimensions (H x W x D) in mm Dimensions in mm (width) Dimensions in mm (height) Dimensions in mm (depth) Cut-out dimensions (W x D) with flush-fit installation in mm Cutout dimensions in mm (width) with surface-mounted	288 92 520 268/292 x 500/524
Dimensions (H x W x D) in mm Dimensions in mm (width) Dimensions in mm (height) Dimensions in mm (depth) Cut-out dimensions (W x D) with flush-fit installation in mm Cutout dimensions in mm (width) with surface-mounted installation Cutout dimensions in mm (depth) with surface-mounted	288 92 520 268/292 x 500/524 268
Dimensions (H x W x D) in mm Dimensions in mm (width) Dimensions in mm (height) Dimensions in mm (depth) Cut-out dimensions (W x D) with flush-fit installation in mm Cutout dimensions in mm (width) with surface-mounted installation Cutout dimensions in mm (depth) with surface-mounted installation Casing height incl. connection box in mm Internal cutout dimensions in mm (width) with flush	288 92 520 268/292 x 500/524 268
Dimensions (H x W x D) in mm Dimensions in mm (width) Dimensions in mm (height) Dimensions in mm (depth) Cut-out dimensions (W x D) with flush-fit installation in mm Cutout dimensions in mm (width) with surface-mounted installation Cutout dimensions in mm (depth) with surface-mounted installation Casing height incl. connection box in mm Internal cutout dimensions in mm (width) with flush installation Internal cutout dimensions in mm (depth) with flush	288 92 520 268/292 × 500/524 268 500
Dimensions (H x W x D) in mm Dimensions in mm (width) Dimensions in mm (height) Dimensions in mm (depth) Cut-out dimensions (W x D) with flush-fit installation in mm Cutout dimensions in mm (width) with surface-mounted installation Cutout dimensions in mm (depth) with surface-mounted installation Casing height incl. connection box in mm Internal cutout dimensions in mm (width) with flush installation Internal cutout dimensions in mm (depth) with flush installation	288 92 520 268/292 × 500/524 268 500 92 268
Dimensions (H x W x D) in mm Dimensions in mm (width) Dimensions in mm (height) Dimensions in mm (depth) Cut-out dimensions (W x D) with flush-fit installation in mm Cutout dimensions in mm (width) with surface-mounted installation Cutout dimensions in mm (depth) with surface-mounted installation Casing height incl. connection box in mm Internal cutout dimensions in mm (width) with flush installation Internal cutout dimensions in mm (depth) with flush installation Weight in kg External cutout dimensions in mm (width) with flush	288 92 520 268/292 × 500/524 268 500 92 268
Dimensions (H x W x D) in mm Dimensions in mm (width) Dimensions in mm (height) Dimensions in mm (height) Cut-out dimensions (W x D) with flush-fit installation in mm Cutout dimensions in mm (width) with surface-mounted installation Cutout dimensions in mm (depth) with surface-mounted installation Casing height incl. connection box in mm Internal cutout dimensions in mm (width) with flush installation Internal cutout dimensions in mm (depth) with flush installation Weight in kg External cutout dimensions in mm (width) with flush installation External cutout dimensions in mm (depth) with flush installation	288 92 520 268/292 x 500/524 268 500 92 268 500 7
Dimensions (H x W x D) in mm Dimensions in mm (width) Dimensions in mm (height) Dimensions in mm (depth) Cut-out dimensions (W x D) with flush-fit installation in mm Cutout dimensions in mm (width) with surface-mounted installation Cutout dimensions in mm (depth) with surface-mounted installation Casing height incl. connection box in mm Internal cutout dimensions in mm (width) with flush installation Internal cutout dimensions in mm (depth) with flush installation Weight in kg External cutout dimensions in mm (width) with flush installation	288 92 520 268/292 x 500/524 268 500 92 268 500 7 292

Miele

CS 7152 FL SmartLine element with two burners

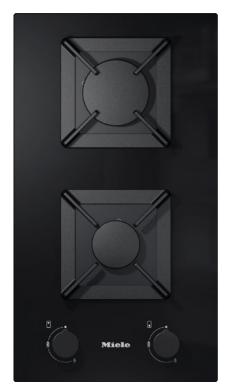

EAN: 4002516612193 / Material number: 12106160 / Old Material Number: 27715250HK

Length of supply lead in m	1,4
Voltage in V	230
Frequency in Hz	50-60
Accessories included	
CSFG 7000 FlameGuard	•
Mains cable	Yes
Jets for natural gas	•
Jets for liquid gas	•