

DAS 4631 125 Edition  
Slimline cooker hood  
with intuitive SmartControl controls



- Elegant design – obsidian black control panel, 60 cm wide
- Networking with Con@ctivity and Miele@home
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless-steel grease filter
- Recirculation mode – Active AirClean or Longlife AirClean filter

EAN: 4002516771616 / Material number: 12459980 / Old Material Number: 28S4631BD

<b>Anniversary promotion</b>	
Anniversary models 125	•
<b>Construction type</b>	
Slimline cooker hood	•
Appliance Colour	Obsidian black
<b>Operating modes</b>	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151,DUU 150
Active charcoal filter (order separately)	DKFS 31-P, DKFS 31-R
<b>User convenience</b>	
Miele@home	•
Automatic function Con@ctivity	•
Electronic controls	•
Power levels (number without Booster level)	3
Touch-on-glass controls	•
Booster levels	2
Programmable Booster level switch-off	•
Run-on time 5/15 min.	•
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
<b>Efficiency and sustainability</b>	
Energy efficiency class (A+++ – D)	A+++
ECO motor	•
PowerManagement system	•
Annual energy consumption in kWh/year	23,5
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	A
<b>Cleaning and care</b>	
Easy-to-clean canopy interior – CleanCover	•
<b>Filter system</b>	
Number of dishwasher-safe stainless steel grease filters (10-ply)	1
<b>Lighting</b>	
LED	•
Number x W	1 x 3 W
Light intensity in lx	330 lx
Colour temperature in K	3500 Kelvin
Dimmer function	•
<b>Fan</b>	
Dual-action fan	•
DC motor	•
<b>Exhaust air</b>	
Air throughput in Level 1 (m <sup>3</sup> /h) according to EN 61591	180
Air throughput in Level 2 (m <sup>3</sup> /h) according to EN 61591	280
Air throughput in Level 3 (m <sup>3</sup> /h) according to EN 61591	400
Air throughput in Booster level (m <sup>3</sup> /h) according to EN 61591	600

DAS 4631 125 Edition  
Slimline cooker hood  
with intuitive SmartControl controls



EAN: 4002516771616 / Material number: 12459980 / Old Material Number: 28S4631BD

Air throughput in booster level 2 (m <sup>3</sup> /h)	720
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	38,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	48,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	56,0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	66,0
Sound power in Booster level 2 (dB(A) re 1 pW) acc. to EN 60704-3	70,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	25,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	34,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	42,0
Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	53,0
Sound pressure in Booster level 2 (dB(A) re 20 µPa) acc. to EN 60704-2-13	57,0
<b>Recirculation</b>	
Air throughput in Level 1 (m <sup>3</sup> /h) according to EN 61591	165
Air throughput in Level 2 (m <sup>3</sup> /h) according to EN 61591	265
Air throughput in Level 3 (m <sup>3</sup> /h) according to EN 61591	380
Air throughput in Booster level (m <sup>3</sup> /h) according to EN 61591	585
Air throughput in Booster level 2 (m <sup>3</sup> /h) according to EN 61591	695
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	43,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	53,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	62,0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	72,0
Sound power in Booster level 2 (dB(A) re 1 pW) acc. to EN 60704-3	77,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	29,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	40,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	48,0
Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	59,0
Sound pressure in Booster level 2 (dB(A) re 20 µPa) acc. to EN 60704-2-13	63,0
<b>Safety</b>	
Safety switch-off	•
Single-ply safety glass (ESG)	•


DAS 4631 125 Edition  
Slimline cooker hood  
with intuitive SmartControl controls



EAN: 4002516771616 / Material number: 12459980 / Old Material Number: 28S4631BD

Technical data	
Canopy width in mm	596
Canopy height in mm	36
Canopy depth in mm	273
Minimum height above electric hobs in mm	450
Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Net weight in kg	12,0
Length of supply lead in m	1,5
Standard plug fitted	•
Total rated load in kW	0,16
Voltage in V	230
Fuse rating in A	10
Number of phases	1
Frequency in Hz	50
Installation notes	
Extraction ducting connection at top	•
Diameter of exhaust duct in mm	150
Accessories included	
Non-return flap	•
Voucher for a DKF 31-S Sensitive AirClean filter	•

DAS 4631 125 Edition  
Slimline cooker hood  
with intuitive SmartControl controls

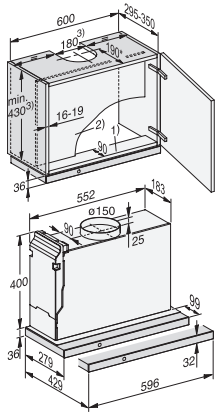

DAS4630, DAS4631, Installation drawings

1) The front section of the wall unit must be fitted with a base panel to secure the cooker hood. If the appliance is fitted further back, e.g. to accommodate a front panel, then the shelf depth should be deeper accordingly. 2) If a partition wall is to be provided in the unit, it must be removable. 3) Extraction, recirculation with conversion kit DUU 150. \* In this installation situation, the deflector plate is flush with the front edge of the housing unit carcass. If you wish to position the cooker hood further forward or further back, dimensions have to be adapted accordingly. Extraction: the height of the wall unit and the cut-out dimensions must take into account any accessories fitted, e.g. silencer, recirculation hood conversion kit).