

DAS 4931 125 Edition
Slimline cooker hood
with intuitive SmartControl controls



- Elegant design – obsidian black control panel, 90 cm wide
- Networking with Con@ctivity and Miele@home
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless-steel grease filter
- Recirculation mode – Active AirClean or Longlife AirClean filter

EAN: 4002516771531 / Material number: 12459990 / Old Material Number: 28S4931BD

| | |
|---|----------------------|
| Anniversary promotion | |
| Anniversary models 125 | • |
| Construction type | |
| Slimline cooker hood | • |
| Construction type and design | |
| Colour | Obsidian black |
| Operating modes | |
| Type of air guide | Can be retrofitted |
| Recirculation conversion kit (order separately) | DUU 151,DUU 150 |
| Active charcoal filter (order separately) | DKFS 31-P, DKFS 31-R |
| User convenience | |
| Miele@home | • |
| Automatic function Con@ctivity | • |
| Electronic controls | • |
| Power levels (number without Booster level) | 3 |
| Touch-on-glass controls | • |
| Run-on time 5/15 min. | • |
| Booster levels | 2 |
| Programmable Booster level switch-off | • |
| Grease filter saturation indicator | • |
| Active charcoal filter saturation indicator | • |
| Easy-to-clean canopy interior – CleanCover | • |
| Efficiency and sustainability | |
| Energy efficiency class (A+++ – D) | A+++ |
| ECO motor | • |
| PowerManagement system | • |
| Annual energy consumption in kWh/year | 23,4 |
| Fluid dynamic efficiency class | A |
| Lighting efficiency class | A |
| Grease filtering efficiency class | A |
| Filter system | |
| Number of dishwasher-safe stainless steel grease filters (10-ply) | 1 |
| Lighting | |
| LED | • |
| Number x W | 1 x 3 W |
| Light intensity in lx | 300 lx |
| Colour temperature in K | 3500 Kelvin |
| Dimmer function | • |
| Fan | |
| Dual-action blower | • |
| DC motor | • |
| Exhaust air | |
| Air throughput in Level 1 (m ³ /h) according to EN 61591 | 180 |
| Air throughput in Level 2 (m ³ /h) according to EN 61591 | 280 |
| Air throughput in Level 3 (m ³ /h) according to EN 61591 | 400 |
| Air throughput in Booster level (m ³ /h) according to EN 61591 | 600 |
| Air throughput in booster level 2 (m ³ /h) | 720 |
| Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3 | 37,0 |

DAS 4931 125 Edition
Slimline cooker hood
with intuitive SmartControl controls



EAN: 4002516771531 / Material number: 12459990 / Old Material Number: 28S4931BD

| | |
|--|------|
| Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3 | 47,0 |
| Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3 | 55,0 |
| Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3 | 66,0 |
| Sound power in Booster level 2 (dB(A) re 1 pW) acc. to EN 60704-3 | 70,0 |
| Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13 | 24,0 |
| Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13 | 33,0 |
| Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13 | 41,0 |
| Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13 | 52,0 |
| Sound pressure in Booster level 2 (dB(A) re 20 µPa) acc. to EN 60704-2-13 | 56,0 |
| Recirculation | |
| Air throughput in Level 1 (m³/h) according to EN 61591 | 165 |
| Air throughput in Level 2 (m³/h) according to EN 61591 | 265 |
| Air throughput in Intensive level (m³/h) according to EN 61591 | 585 |
| Air throughput in Level 3 (m³/h) according to EN 61591 | 380 |
| Air throughput in Booster level 2 (m³/h) according to EN 61591 | 695 |
| Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3 | 43,0 |
| Noise power level in Intensive level (dB(A) re 1 pW) according to EN 60704-3 | 73,0 |
| Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3 | 53,0 |
| Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3 | 61,0 |
| Sound power in Booster level 2 (dB(A) re 1 pW) acc. to EN 60704-3 | 77,0 |
| Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13 | 29,0 |
| Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13 | 39,0 |
| Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13 | 48,0 |
| Noise pressure level in Intensive level (dB(A) re 20 µPa) according to EN 60704-2-13 | 59,0 |
| Sound pressure in Booster level 2 (dB(A) re 20 µPa) acc. to EN 60704-2-13 | 63,0 |
| Safety | |
| Safety switch-off | • |
| Single-ply safety glass (ESG) | • |
| Technical data | |
| Canopy width in mm | 896 |
| Canopy height in mm | 36 |
| Canopy depth in mm | 273 |
| Minimum height above electric hobs in mm | 450 |


DAS 4931 125 Edition
Slimline cooker hood
with intuitive SmartControl controls



EAN: 4002516771531 / Material number: 12459990 / Old Material Number: 28S4931BD

| | |
|---|------|
| Net weight in kg | 14,0 |
| Length of supply lead in m | 1,5 |
| Standard plug fitted | • |
| Minimum safety distance above gas hobs (max. 12.6 kW total power, burner \leq 4.5 kW) in mm | 650 |
| Total rated load in kW | 0,16 |
| Voltage in V | 230 |
| Fuse rating in A | 10 |
| Number of phases | 1 |
| Frequency in Hz | 50 |
| Installation notes | |
| Extraction ducting connection at top | • |
| Diameter of exhaust duct in mm | 150 |
| Accessories included | |
| Non-return flap | • |
| Voucher for a DKF 31-S Sensitive AirClean filter | • |

DAS 4931 125 Edition Slimline cooker hood with intuitive SmartControl controls

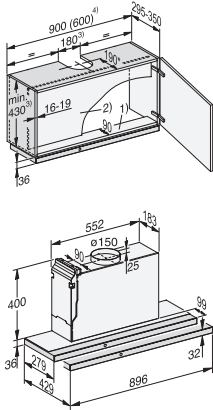

DAS4930, DAS4931, Installation drawings

1) The front section of the wall unit must be fitted with a base panel to secure the cooker hood. If the appliance is fitted further back, e.g. to accommodate a front panel, then the shelf depth should be deeper accordingly. . 2) If a partition wall is to be provided in the unit, it must be removable. . 3) Extraction, recirculation with conversion kit DUU 150. . 4) Installation is also possible in a 600 mm wide unit. . * In this installation situation, the deflector plate is flush with the front edge of the housing unit carcass. . If you wish to position the cooker hood further forward or further back, dimensions have to be adapted accordingly. . , Extraction: the height of the wall unit and the cut-out dimensions must take into account any accessories fitted, e.g. silencer, recirculation hood conversion kit).