


## PRI 421 [EL SOM LAM IB RF]

Rotary ironer, electrically heated

with leaf-spring padding, feed-in belts and return feed for marine applications.

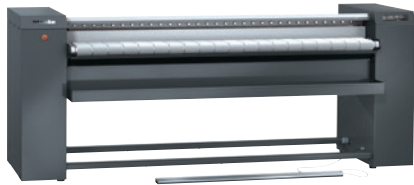

- Performance 67.0 kg/h\*, roller diameter 365 mm, working width 2040 mm
- Fast cooling of textiles – EasyFold feed table
- State-of-the-art controls – Touch display
- Selection of the most important settings – favourite programmes
- Perfect rotary ironing performance – flexibly positioned heater plate


EAN: 4002516367611 / Material number: 11606170 / Old Material Number: 53421109SOM

<b>Construction type and version</b>	
Construction type	Laundry infeed at the front, laundry outfeed at the back
Can be set up against a wall	•
Range	Professional
Outer casing	Iron grey
Roller diameter in mm	365
Working width in mm	2040
Heater plate material	Aluminium
Padding	Leaf-spring padding
Ironer cover	ARAMID needle-felt cloth
<b>Application</b>	
Suitable for offshore use	•
Suitable for marine use	•
<b>Performance data</b>	
Max. ironing performance at 25 % residual moisture in kg/h	113.0
Max. ironing performance at 50 % residual moisture in kg/h	67.0
Tested operating hours	20000
<b>Control system</b>	
Control system	Touch display
Touch display (optional)	Touch-Display PRI
Programme setting	Setting of defined programme parameters
Minimum ironing speed, controlled in m/min	1.5
Maximum ironing speed, controlled in m/min	5.4
Adjustable temperature	Infinitely variable
<b>Standard electrical connection</b>	
Heating type	Electric
Electrical connection	3N AC 400V 50-60HZ
Electric heater rating in kW	22.90
Total connected load in kW	23.50
Fuse rating in A	50
<b>Dimensions and weight</b>	
External dimensions, height in mm	1110
External dimensions, width in mm	2759
External dimensions, depth in mm	1441
External dimensions, gross height in mm	1388
External dimensions, gross width in mm	2866
External dimensions, gross depth in mm	1096
Net weight in kg	458
Gross weight in kg	537
Maximum floor load in N/m <sup>2</sup>	4493
<b>Emissions data</b>	
Emission sound pressure level in the workplace	56 dB(A) re 20 µPa
Heat dissipation into the room in MJ/h	13.70
<b>Features</b>	
Patented EasyFold out-feed table	•
Outfeed table extension (optional)	•
HPC heater plate	•
Automatic finger guard	•

## PRI 421 [EL SOM LAM IB RF]

Rotary ironer, electrically heated

with leaf-spring padding, feed-in belts and return feed for marine applications.

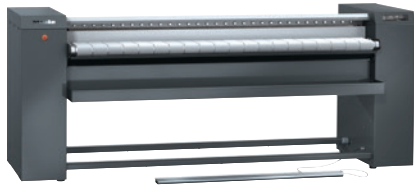

EAN: 4002516367611 / Material number: 11606170 / Old Material Number: 53421109SOM

FlexControl footswitch	•
In-feed table with feed-in bands	•
Pick-off bands	•
Laundry box	•
Laundry return feed	•
Cover (optional)	•
Favourite programme	•
Incorrect feed recognition	•
Air suspension	•
Pause function	•
High contact pressure	•
Clean and wax heater plate indicator (op	•
Emergency switch-off	•
APRI 319 care set for the heater plate included in the scope of delivery	•
Machine-independent accessories	•
<b>Connection options</b>	
Peak load cut-out/energy management (optional)	•
<b>Standards, test certificates and symbols</b>	
VDE	•
CE	•
WEEE	•
VDE-EMC	•
Splash-proof IPX0	•
UKCA	•
Complies with Machinery Directive 2006/42/EC	•