


## PRI 214 [EL SOM STW]

Rotary ironer, electrically heated

with the latest controls and flexible working height for marine applications.

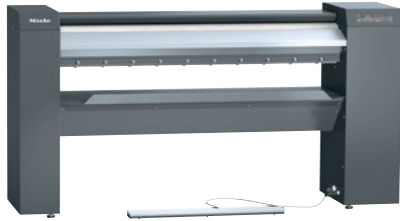

- Performance 33.0 kg/h\*, roller diameter 210 mm, working width 1400 mm
- Ideal ergonomics – height-adjustable and optional plinth
- State-of-the-art controls – Touch display
- Selection of the most important settings – favourite programmes
- Perfect rotary ironing performance – flexibly positioned heater plate

\* With 25 % residual moisture – performance data according to DIN 11902: the achievable ironing performance depends on overall conditions such as, for example, the type of laundry and the experience of the operator.


EAN: 4002516422914 / Material number: 11744590 / Old Material Number: 53214008SOM

| Construction type and version                              |                                         |
|------------------------------------------------------------|-----------------------------------------|
| Construction type                                          | Laundry infeed and outfeed at the front |
| Can be set up against a wall                               | •                                       |
| Range                                                      | Professional                            |
| Outer casing                                               | Iron grey                               |
| Roller diameter in mm                                      | 210                                     |
| Working width in mm                                        | 1400                                    |
| Heater plate material                                      | Aluminium                               |
| Padding                                                    | Supple steel wool                       |
| Ironer cover                                               | ARAMID needle-felt cloth                |
| Application                                                |                                         |
| Suitable for offshore use                                  | •                                       |
| Suitable for marine use                                    | •                                       |
| Performance data                                           |                                         |
| Max. ironing performance at 25 % residual moisture in kg/h | 33.0                                    |
| Tested operating hours                                     | 20000                                   |
| Control system                                             |                                         |
| Control system                                             | Touch display                           |
| Touch display (optional)                                   | Touch-Display PRI                       |
| Programme setting                                          | Setting of defined programme parameters |
| Minimum ironing speed, controlled in m/min                 | 1.5                                     |
| Maximum ironing speed, controlled in m/min                 | 4.0                                     |
| Adjustable temperature                                     | Infinitely variable                     |
| Standard electrical connection                             |                                         |
| Heating type                                               | Electric                                |
| Electrical connection                                      | 3N AC 400V 50-60HZ                      |
| Electric heater rating in kW                               | 6.50                                    |
| Total connected load in kW                                 | 7.00                                    |
| Fuse rating in A                                           | 16                                      |
| Dimensions and weight                                      |                                         |
| External dimensions, height in mm                          | 1032                                    |
| External dimensions, width in mm                           | 1979                                    |
| External dimensions, depth in mm                           | 650                                     |
| External dimensions, gross height in mm                    | 1374                                    |
| External dimensions, gross width in mm                     | 2163                                    |
| External dimensions, gross depth in mm                     | 660                                     |
| Net weight in kg                                           | 140                                     |
| Gross weight in kg                                         | 155                                     |
| Maximum floor load in N/m <sup>2</sup>                     | 1400                                    |
| Emissions data                                             |                                         |
| Emission sound pressure level in the workplace             | <70 dB(A) re 20 µPa                     |
| Heat dissipation into the room in MJ/h                     | 11.00                                   |
| Features                                                   |                                         |
| Automatic finger guard                                     | •                                       |
| FlexControl footswitch                                     | •                                       |
| Feed-in board                                              | •                                       |
| Pick-off bands                                             | •                                       |
| Laundry box                                                | •                                       |

## PRI 214 [EL SOM STW]

Rotary ironer, electrically heated

with the latest controls and flexible working height for marine applications.

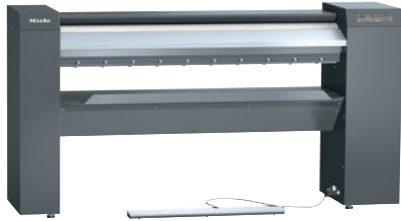

EAN: 4002516422914 / Material number: 11744590 / Old Material Number: 53214008SOM

|                                                                          |   |
|--------------------------------------------------------------------------|---|
| Laundry return feed                                                      | • |
| Favourite programme                                                      | • |
| Incorrect feed recognition                                               | • |
| Air suspension                                                           | • |
| Pause function                                                           | • |
| High contact pressure                                                    | • |
| Clean and wax heater plate indicator (op                                 | • |
| Plinth (optional)                                                        | • |
| Option of ironing when seated                                            | • |
| APRI 319 care set for the heater plate included in the scope of delivery | • |
| Machine-independent accessories                                          | • |
| <b>Connection options</b>                                                |   |
| Payment system (optional)                                                | • |
| Peak load cut-out/energy management                                      | • |
| <b>Standards, test certificates and symbols</b>                          |   |
| VDE                                                                      | • |
| CE                                                                       | • |
| EAC                                                                      | • |
| WEEE                                                                     | • |
| VDE-EMC                                                                  | • |
| RCM                                                                      | • |
| Splash-proof IPX0                                                        | • |
| UKCA                                                                     | • |
| Complies with Machinery Directive 2006/42/EC                             | • |