

DAS 2620  
Slimline cooker hood  
with EasySwitch controls for convenient operation



- Classic design – stainless steel panel, 60 cm wide
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless-steel grease filter
- Safe and easy to clean – Miele CleanCover
- Recirculation mode – Active AirClean or Longlife AirClean filter

A

EAN: 4002516467021 / Material number: 11878170 / Old Material Number: 28S2620SGB

<b>Construction type</b>	
Slimline cooker hood	•
<b>Operating modes</b>	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151
Active charcoal filter (order separately)	DKFS 31-P, DKFS 31-R
<b>Design</b>	
Colour	Stainless steel
<b>User convenience</b>	
Electronic controls	•
Easy-to-clean canopy interior – CleanCover	•
<b>Efficiency and sustainability</b>	
Energy efficiency class (A+++ – D)	A
Annual energy consumption in kWh/year	41.7
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	A
<b>Filter system</b>	
Number of dishwasher-safe stainless steel grease filters (10-ply)	1
<b>Lighting</b>	
LED	•
Number x W	1 x 3,2 W
Light intensity in lx	310 lx
Colour temperature in K	3500 Kelvin
<b>Fan</b>	
Dual-action fan	•
AC motor	•
<b>Exhaust air</b>	
Air throughput in Level 1 (m <sup>3</sup> /h) according to EN 61591	195
Air throughput in Level 2 (m <sup>3</sup> /h) according to EN 61591	295
Air throughput in Level 3 (m <sup>3</sup> /h) according to EN 61591	410
Air throughput in Booster level (m <sup>3</sup> /h) according to EN 61591	555
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	47.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	55.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	61.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	68.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	34.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	41.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	47.0
Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	54.0
<b>Recirculation</b>	
Air throughput in Level 1 (m <sup>3</sup> /h) according to EN 61591	190


DAS 2620  
Slimline cooker hood  
with EasySwitch controls for convenient operation



EAN: 4002516467021 / Material number: 11878170 / Old Material Number: 28S2620SGB

Air throughput in Level 2 (m <sup>3</sup> /h) according to EN 61591	290
Air throughput in Level 3 (m <sup>3</sup> /h) according to EN 61591	415
Air throughput in Booster level 1 (m <sup>3</sup> /h) according to EN 61591	550
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	53.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	60.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	68.0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	74.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	39.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	46.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	54.0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	61.0
<b>Safety</b>	
Safety switch-off	•
<b>Technical data</b>	
Canopy width in mm	596
Canopy height in mm	36
Canopy depth in mm	273
Minimum height above electric hobs in mm	450
Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Net weight in kg	12.0
Length of supply lead in m	1.5
Standard plug fitted	•
Total rated load in kW	0.20
Voltage in V	230
Fuse rating in A	10
Number of phases	1
Frequency in Hz	50
<b>Installation notes</b>	
Extraction ducting connection at top	•
Diameter of exhaust duct in mm	150
<b>Accessories included</b>	
Non-return flap	•
<b>Optional accessories</b>	
Active charcoal filter	Nein

DAS 2620  
Slimline cooker hood  
with EasySwitch controls for convenient operation

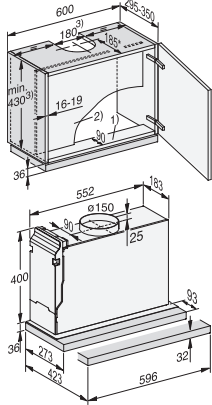

DAS2620, DAS2622 Living, DAS2620 EXTA, DAS4620,  
Installation drawings

1) The front section of the wall unit must be fitted with a base panel to secure the cooker hood. If the appliance is fitted further back, e.g. to accommodate a front panel, then the shelf depth should be deeper accordingly. , 2) If a partition wall is to be provided in the unit, it must be removable., 3) Extraction, recirculation with conversion kit DUU 150., , \* In this installation situation, the deflector plate is flush with the front edge of the housing unit carcass. , If you wish to position the cooker hood further forward or further back (e.g. because it has a front panel), dimensions have to be adapted accordingly., , Extraction: the height of the wall unit and the cut-out dimensions must take into account any accessories fitted, e.g. silencer, recirculation hood conversion kit).