

DAW 1920 Active
Wall mounted cooker hood
with EasySwitch pushbuttons for convenient operation



- Timeless design – stainless steel canopy 898 mm wide
- Powerful – 645 m³/h in Booster level
- LED strip for uniform lighting
- Effective filtration – 10-ply aluminium metal grease filter
- Suitable for every home – for extraction or recirculation



EAN: 4002516657057 / Material number: 12178510 /
Old Material Number: 28W1920EGB

Construction type	
Wall mounted cooker hood	•
Appliance Colour	Stainless steel
Operating modes	
Type of air guide	Can be retrofitted
Active charcoal filter (order separately)	DKFS 36-P
User convenience	
Electronic controls	•
Booster levels	1
Efficiency and sustainability	
Annual energy consumption in kWh/year	49.8
Energy efficiency class (A+++ – D)	A
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	B
Filter system	
Number of dishwasher-safe metal grease filters	3
Lighting	
Number x W	1 x 3,2 W
Light intensity in lx	350 lx
Colour temperature in K	3500 Kelvin
Fan	
Dual-action fan	•
AC motor	•
Exhaust air	
Air throughput in Level 1 (m ³ /h) according to EN 61591	255
Air throughput in Level 2 (m ³ /h) according to EN 61591	400
Air throughput in booster level 1 (m ³ /h)	645
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	53.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	62.0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	71.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	39.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	48.0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	57.0
Recirculation	
Air throughput in Level 1 (m ³ /h) according to EN 61591	235
Air throughput in Level 2 (m ³ /h) according to EN 61591	390
Air throughput in Booster level 1 (m ³ /h) according to EN 61591	620
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	54.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	64.0

DAW 1920 Active
Wall mounted cooker hood
with EasySwitch pushbuttons for convenient operation



EAN: 4002516657057 / Material number: 12178510 /
Old Material Number: 28W1920EGB

Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3 74.0

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13 40.0

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13 50.0

Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13 60.0

Technical data

Overall hood height for extraction mode and external in mm 673–993

Overall hood height for recirculation and external in mm 803–1123

Overall height for vented and external in in. (mm) 673

Canopy width in mm 898

Overall height for extraction mode and external mode cooker hoods in mm 993

Canopy height in mm 50

Overall height for recirculation in in. (mm) 803

Canopy depth in mm 500

Overall height for recirculation mode cooker hoods in mm 1123

Net weight in kg 15.0

Length of supply lead in m 1.4

Standard plug fitted •

Minimum height above electric hobs in mm 450

Voltage in V 230

Fuse rating in A 10

Number of phases 1

Total rated load in kW 0.24

Frequency in Hz 50

Installation notes

Extraction ducting connection at top •

Extraction connection at top and rear •


Diameter of exhaust duct in mm 150

Telescopic chimney •

Accessories included

Non-return flap •

DAW 1920 Active
Wall mounted cooker hood
with EasySwitch pushbuttons for convenient operation

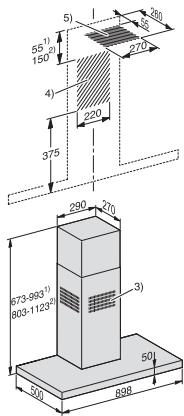

DAW1920, DAW1922W Living, Installation drawings

1) Extraction, 2) Recirculation, 3) Ventilation grille positioned at the top for recirculation, 4+5) Installation area (only 4 required for recirculation mode)