

## DA 9092 W Screen

Wall mounted cooker hood

With vertical glass front and extremely flat design for more headroom.



- Linear design with 880 mm width and minimum depth of 260 mm
- Modern touch controls on glass front
- LED strip for uniform lighting
- Wide rack – can be used as a shelf for herbs, for example
- Efficient filtration- 10-ply stainless-steel grease filter

**B**

EAN: 4002516798620 / Material number: 12526670 / Old Material Number: 28909240GB

| <b>Construction type</b>  |                        |
|---|------------------------|
| Wall mounted cooker hood  | •                      |
| <b>Operating modes</b>  |                        |
| Type of air guide   | Can be retrofitted     |
| Active charcoal filter (order separately)                                 | DKF 29 charcoal filter |
| <b>Design</b>   |                        |
| Colour  | Obsidian black         |
| <b>User convenience</b>   |                        |
| Electronic controls   | •                      |
| Power levels (number without Booster level)                               | 3                      |
| Touch controls  | •                      |
| Programmable Booster level switch-off                                     | •                      |
| Silence package   | •                      |
| Easy-to-clean canopy interior – CleanCover                                | •                      |
| <b>Efficiency and sustainability</b>                                      |                        |
| Energy efficiency class (A+++ – D)  | B                      |
| Annual energy consumption in kWh/year                                     | 67.7                   |
| Fluid dynamic efficiency class  | B                      |
| Lighting efficiency class   | A                      |
| Grease filtering efficiency class   | B                      |
| <b>Filter system</b>  |                        |
| Number of dishwasher-safe stainless steel grease filters (10-ply)         | 2                      |
| <b>Lighting</b>   |                        |
| LED   | •                      |
| Number x W  | 1 x 3,2 W              |
| Light intensity in lx   | 300 lx                 |
| Colour temperature in K   | 3500 Kelvin            |
| <b>Fan</b>  |                        |
| Dual-action fan   | •                      |
| AC motor  | •                      |
| <b>Exhaust air</b>  |                        |
| Air throughput in Level 1 (m <sup>3</sup> /h) according to EN 61591       | 205                    |
| Air throughput in Level 2 (m <sup>3</sup> /h) according to EN 61591       | 310                    |
| Air throughput in Level 3 (m <sup>3</sup> /h) according to EN 61591       | 415                    |
| Air throughput in Booster level (m <sup>3</sup> /h) according to EN 61591 | 670                    |
| Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3            | 39.0                   |
| Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3            | 45.0                   |
| Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3            | 50.0                   |
| Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3           | 62.0                   |
| Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13    | 25.0                   |
| Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13    | 31.0                   |
| Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13    | 36.0                   |

DA 9092 W Screen

Wall mounted cooker hood

With vertical glass front and extremely flat design for more headroom.



EAN: 4002516798620 / Material number: 12526670 / Old Material Number: 28909240GB

Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13 48.0

#### Recirculation

Air throughput in Level 1 (m<sup>3</sup>/h) according to EN 61591 190

Air throughput in Level 2 (m<sup>3</sup>/h) according to EN 61591 290

Air throughput in Level 3 (m<sup>3</sup>/h) according to EN 61591 385

Air throughput in Booster level 1 (m<sup>3</sup>/h) according to EN 61591 605

Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3 44.0

Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3 51.0

Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3 58.0

Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3 69.0

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13 30.0

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13 37.0

Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13 44.0

Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13 55.0

#### Safety

Safety switch-off •

Single-ply safety glass (ESG) •

#### Technical data

Overall hood height for extraction mode and external in mm 500

Overall hood height for recirculation and external in mm 500

Overall height for vented and external in in. (mm) 500

Canopy width in mm 880

Overall height for extraction mode and external mode cooker hoods in mm 500

Canopy height in mm 500

Overall height for recirculation in in. (mm) 500

Canopy depth in mm 260

Overall height for recirculation mode cooker hoods in mm 500

Minimum height above electric hobs in mm 450

Net weight in kg 21.5

Length of supply lead in m 1.5

Standard plug fitted •

Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm 650

Total rated load in kW 0.20

Voltage in V 230

Fuse rating in A 10

Number of phases 1

Frequency in Hz 50

#### Installation notes

Extraction ducting connection at top •

Extraction connection at top and rear •

Diameter of exhaust duct in mm 150

DA 9092 W Screen

Wall mounted cooker hood

With vertical glass front and extremely flat design for more headroom.




EAN: 4002516798620 / Material number: 12526670 / Old Material Number: 28909240GB

| Accessories included   |      |
|------------------------|------|
| Non-return flap        | •    |
| Optional accessories   |      |
| Active charcoal filter | Nein |

## DA 9092 W Screen

Wall mounted cooker hood

With vertical glass front and extremely flat design for more headroom.

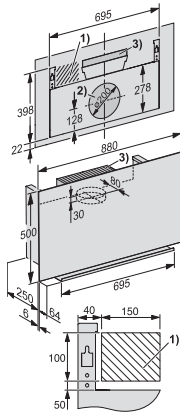

DA9091W, DA9092W (Installation drawings)

1) Installation area for the mains connection., 2) Cut-out when ducting to the rear. Alternative vent connection at the back., 3) Air outlet for recirculation. A distance of at least 200 mm must be maintained between the top of the appliance and the ceiling or any furniture units installed above the appliance.,