

Professional washing machine, electrically heated, with drain valve and detergent drawer, M Touch Pro Plus freely programmable, for marine use.




- Drum volume 140 l 140 l, maximum load size 16.0 kg 16.0 kg
- Top cleaning & consumption values innovative Miele technology
- Simple and safe operation thanks to automatic door lock
- Ideal operation thanks to colour touch display – M Touch Pro Plus
- Connected for the future using LAN and WiFi

EAN: 4002516391593 / Material number: 11682940 / Old Material Number: 51916007SOM

Occurrent in the conduction	
Construction type and version	Fuent les deu
Construction type	Front loader
Range	Performance Plus
Front Control manual colours	Stainless steel
Control panel colour	Stainless steel
Maximum load with a load ratio of 1:9 in kg	16.0
Load ratio	1:9
Load in kg	16.0
Drum volume in I	140
Door opening [Ø] in mm	415
Door opening angle in degrees	180
Door hinge	right
Automatic door lock	•
Innovative suds container	•
Maintenance-free motor with frequency converter	•
Patented honeycomb drum 2.0	•
Application	
Suitable for offshore use	•
Suitable for marine use	•
Performance data	
Tested virucidal efficacy	•
Proven hygiene	•
Specific water consumption for cold water connection in I/ kg	6.20
Specific energy consumption for cold water connection in kWh/kg	0.14
Specific water consumption for hot water connection in I/kg	5.90
Specific energy consumption for hot water connection in kWh/kg	0.06
Water consumption with cold water connection in I	99.2
Water consumption for cold water connection in Mops standard 60 °C programme in I	182.2
Energy consumption with cold water connection in kW	2.24
Energy consumption for cold water connection in Mops standard 60 °C programme in kWh	3.21
Programme duration in minutes with cold water connection	49
Water consumption with hot water connection in I	94.4
Water consumption for hot water connection in Mops standard 60 °C programme in I	178.1
Energy consumption with hot water connection in kW	0.96
Energy consumption for hot water connection in Mops standard 60 °C programme in kWh	1.33
Programme duration in minutes with cold water and hot water connection	43
Water consumption in ECO programme with cold water connection in I	92.8
Energy consumption in ECO programme with cold water	1.60
Programme duration in minutes with cold water connection	34
in ECO programme	
Water consumption in ECO programme with hot water connection in I	91.2
Energy consumption in ECO programme with hot water	0.48



Professional washing machine, electrically heated, with drain valve and detergent drawer, M Touch Pro Plus freely programmable, for marine use.

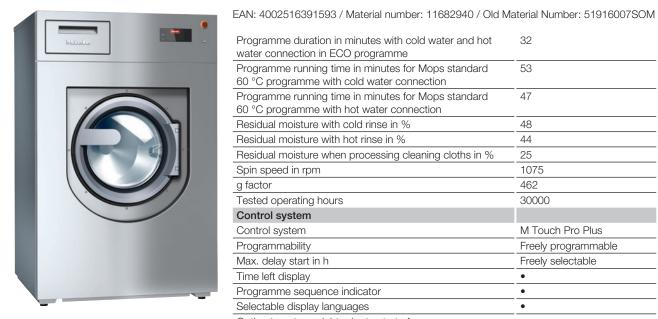

Programme duration in minutes with cold water and hot	32
water connection in ECO programme	
Programme running time in minutes for Mops standard 60 °C programme with cold water connection	53
Programme running time in minutes for Mops standard	47
60 °C programme with hot water connection	
Residual moisture with cold rinse in %	48
Residual moisture with hot rinse in %	44
Residual moisture when processing cleaning cloths in %	25
Spin speed in rpm	1075
g factor	462
Tested operating hours	30000
Control system	
Control system	M Touch Pro Plus
Programmability	Freely programmable
Max. delay start in h	Freely selectable
Time left display	•
Programme sequence indicator	•
Selectable display languages	•
Option to enter weight prior to start of programme	•
Standard/target grp programmes	
Basic programmes	•
Dispensing	
Detergent drawer	3 compartments
Maximum number of connections for liquid dispenser	12
pumps [number]	
Empty sensor	•
Empty sensor Standard electrical connection	•
	• Electric
Standard electrical connection	
Standard electrical connection Heating type Electrical connection Heater rating in kW	Electric
Standard electrical connection Heating type Electrical connection	Electric 3 AC 480V 60HZ
Standard electrical connection Heating type Electrical connection Heater rating in kW	Electric 3 AC 480V 60HZ 15.10
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW	Electric 3 AC 480V 60HZ 15.10 15.70
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A	Electric 3 AC 480V 60HZ 15.10 15.70
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1	Electric 3 AC 480V 60HZ 15.10 15.70 25
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection	Electric 3 AC 480V 60HZ 15.10 15.70 25 3 AC 440V 60HZ
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW	Electric 3 AC 480V 60HZ 15.10 15.70 25 3 AC 440V 60HZ 12.80
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW	Electric 3 AC 480V 60HZ 15.10 15.70 25 3 AC 440V 60HZ 12.80 13.40
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Water rating in A Water connection/drainage	Electric 3 AC 480V 60HZ 15.10 15.70 25 3 AC 440V 60HZ 12.80 13.40 25
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connection Heater rating in kW Total connected load in kW Fuse rating in kW Total connected load in kW Fuse rating in A	Electric 3 AC 480V 60HZ 15.10 15.70 25 3 AC 440V 60HZ 12.80 13.40 25 3 x 1/2" hose w/ 3/4" union 1x 1/2" hose w/ 3/4" th.
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in kW Total connected load in kW Fuse rating in A Water connection/drainage Cold water [number] Hot water [number]	Electric 3 AC 480V 60HZ 15.10 15.70 25 3 AC 440V 60HZ 12.80 13.40 25 3 x 1/2" hose w/ 3/4" union 1x 1/2" hose w/ 3/4" th. union
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Water connected load in kW Fuse rating in A Water connection/drainage Cold water [number] Hot water (optional) [number]	Electric 3 AC 480V 60HZ 15.10 15.70 25 3 AC 440V 60HZ 12.80 13.40 25 3 x 1/2" hose w/ 3/4" union 1x 1/2" hose w/ 3/4" th. union 2 x 1/2" w/ 3/4" union
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Water rating in A Water connection/drainage Cold water [number] Hot water (optional) [number] Dump valve	Electric 3 AC 480V 60HZ 15.10 15.70 25 3 AC 440V 60HZ 12.80 13.40 25 3 x 1/2" hose w/ 3/4" union 1x 1/2" hose w/ 3/4" th. union
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in kW Total connected load in kW Fuse rating in A Water connection/drainage Cold water [number] Hot water [number] Hard water (optional) [number] Dump valve Dimensions and weight	Electric 3 AC 480V 60HZ 15.10 15.70 25 3 AC 440V 60HZ 12.80 13.40 25 3 x 1/2" hose w/ 3/4" union 1x 1/2" hose w/ 3/4" th. union 2 x 1/2" w/ 3/4" union DN 70
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in kW Total connected load in kW Fuse rating in A Water connection/drainage Cold water [number] Hot water [number] Hard water (optional) [number] Dump valve Dimensions and weight External dimensions, height in mm	Electric 3 AC 480V 60HZ 15.10 15.70 25 3 AC 440V 60HZ 12.80 13.40 25 3 x 1/2" hose w/ 3/4" union 1x 1/2" hose w/ 3/4" th. union 2 x 1/2" w/ 3/4" union DN 70 1450
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in kW Total connected load in kW Fuse rating in A Water connection/drainage Cold water [number] Hot water (number] Hard water (optional) [number] Dump valve Dimensions and weight External dimensions, height in mm External dimensions, width in mm	Electric 3 AC 480V 60HZ 15.10 15.70 25 3 AC 440V 60HZ 12.80 13.40 25 3 x 1/2" hose w/ 3/4" union 1x 1/2" hose w/ 3/4" th. union 2 x 1/2" w/ 3/4" union DN 70 1450 924
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in kW Total connected load in kW Fuse rating in A Water connection/drainage Cold water [number] Hot water [number] Hard water (optional) [number] Dump valve Dimensions and weight External dimensions, height in mm External dimensions, depth in mm	Electric 3 AC 480V 60HZ 15.10 15.70 25 3 AC 440V 60HZ 12.80 13.40 25 3 x 1/2" hose w/ 3/4" union 1x 1/2" hose w/ 3/4" th. union 2 x 1/2" w/ 3/4" union DN 70 1450 924 835
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in kW Total connected load in kW Fuse rating in A Water connection/drainage Cold water [number] Hot water [number] Hard water (optional) [number] Dump valve Dimensions and weight External dimensions, height in mm External dimensions, gross height in mm External dimensions, gross height in mm	Electric 3 AC 480V 60HZ 15.10 15.70 25 3 AC 440V 60HZ 12.80 13.40 25 3 x 1/2" hose w/ 3/4" union 1x 1/2" hose w/ 3/4" th. union 2 x 1/2" w/ 3/4" union DN 70 1450 924 835 1585
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in kW Total connected load in kW Fuse rating in A Water connection/drainage Cold water [number] Hot water [number] Hard water (optional) [number] Dump valve Dimensions and weight External dimensions, height in mm External dimensions, depth in mm External dimensions, gross height in mm External dimensions, gross width in mm	Electric A C 480V 60HZ I5.10 I5.70 25 A C 440V 60HZ I2.80 I3.40 25 A X 1/2" hose w/ 3/4" union I X 1/2" hose w/ 3/4" th. union 2 X 1/2" w/ 3/4" union DN 70 I450 924 835 I585 I090
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in kW Total connected load in kW Fuse rating in A Water connection/drainage Cold water [number] Hot water [number] Hard water (optional) [number] Dump valve Dimensions and weight External dimensions, height in mm External dimensions, gross height in mm External dimensions, gross width in mm External dimensions, gross width in mm External dimensions, gross width in mm	Electric A C 480V 60HZ I5.10 I5.70 25 A C 440V 60HZ I2.80 I3.40 25 A X 1/2" hose w/ 3/4" union I X 1/2" hose w/ 3/4" th. union 2 X 1/2" w/ 3/4" union DN 70 I450 924 835 I585 1090 I130
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in kW Total connected load in kW Fuse rating in A Water connection/drainage Cold water [number] Hot water [number] Hard water (optional) [number] Dump valve Dimensions and weight External dimensions, height in mm External dimensions, depth in mm External dimensions, gross height in mm External dimensions, gross width in mm	Electric A C 480V 60HZ I5.10 I5.70 25 A C 440V 60HZ I2.80 I3.40 25 A X 1/2" hose w/ 3/4" union I X 1/2" hose w/ 3/4" th. union 2 X 1/2" w/ 3/4" union DN 70 I450 924 835 I585 I090



Professional washing machine, electrically heated, with drain valve and detergent drawer, M Touch Pro Plus freely programmable, for marine use.

EAN: 4002516391593 / Material number: 11682940 / Old Material Number: 51916007SOM

Gross weight in kg	376
Maximum floor load in N/m ²	5277
Emissions data	
Emission sound pressure level in the workplace	65 dB(A) re 20 μPa
Heat dissipation into the room in MJ/h	6.48
Features	
Patented pre-spin	•
Cloth reprocessing	•
3-dimensional imbalance monitoring	•
Disinfection rinse	•
Efficient scoop-and-ladle ribs	<u> </u>
EcoSpeed	•
Spring-in-spring system	•
Temperature monitoring	•
Special heater element	•
Automatic load control+	•
Volumetric flow meter (optional)	•
Weighing plinth (optional)	•
Add laundry	•
Programme selection via colour frame	•
Emergency switch-off	•
Machine-independent accessories	•
Efficiency and sustainability	
Recycling rate in %	92
Connection options	
Payment system (optional)	•
Optical interface for service access	•
Peak load cut-out/energy management (optional)	•
Water recovery (optional)	•
LAN	•
WiFi	•
Connector Box	•
Capacities	
Respirator masks [number]	13
Helmets [number]	4
	2
Overalls [number]	3
Over jackets [number]	
Chemical protection suits [number]	1
Synthetic duvets [number]	
Synthetic pillows [number]	3
Down duvets [number]	1
Down pillows [number]	3
Cloths, 22 g [number]	355
Cotton mops, 40 cm / 190 g [number]	82
Cotton mops, 50 cm / 220 g [number]	71
Microfibre mops, 40 cm / 120 g [number]	130
Microfibre mops, 50 cm / 170 g [number]	91
Mops, office, 100 g [quantity]	160
Mops, stairway, 150 g [quantity]	105



Professional washing machine, electrically heated, with drain valve and detergent drawer, M Touch Pro Plus freely programmable, for marine use.



EAN: 4002516391593 / Material number: 11682940 / Old Material Number: 51916007SOM

Standards, test certificates and symbols	
CE	•
VDE-EMC	•
VDE	•
Splash-proof safety rating IPX4	•
UKCA	•
WEEE	•
EAC	•
Complies with Machinery Directive 2006/42/EC	•

Complies with Machinery Directive 2006/42/EC