

DAW 1920 Active  
Wall mounted cooker hood  
with EasySwitch pushbuttons for convenient operation



- Timeless design – 898 mm wide stainless steel cooker hood
- Powerful – 645 m<sup>3</sup>/h on the booster setting
- LED strip for uniform lighting
- Effective filtration – 10-ply aluminum metal grease filter
- Suitable for every home – for extraction or recirculation



EAN: 4002516657057 / Material number: 12178510 / Old Material Number: 28W1920EGB

<b>Construction type</b>	
Wall mounted cooker hood	•
<b>Construction type and design</b>	
Colour	Stainless steel
<b>Operating modes</b>	
Type of air guide	Can be retrofitted
Active charcoal filter (order separately)	DKFS 36-P
<b>User convenience</b>	
Electronic controls	•
Booster levels	1
<b>Efficiency and sustainability</b>	
Energy efficiency class (A+++ – D)	A
Annual energy consumption in kWh/year	49.8
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	B
<b>Filter system</b>	
Number of dishwasher-safe metal grease filters	3
<b>Lighting</b>	
Number x W	1 x 3,2 W
Light intensity in lx	350 lx
Colour temperature in K	3500 Kelvin
<b>Fan</b>	
Dual-action fan	•
AC motor	•
<b>Exhaust air</b>	
Air throughput in Level 1 (m <sup>3</sup> /h) according to EN 61591	255
Air throughput in Level 2 (m <sup>3</sup> /h) according to EN 61591	400
Air throughput in Booster level (m <sup>3</sup> /h) according to EN 61591	645
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	53.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	62.0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	71.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	39.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	48.0
Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	57.0
<b>Recirculation</b>	
Air throughput in Level 1 (m <sup>3</sup> /h) according to EN 61591	235
Air throughput in Level 2 (m <sup>3</sup> /h) according to EN 61591	390
Air throughput in Intensive level (m <sup>3</sup> /h) according to EN 61591	620
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	54.0
Noise power level in Intensive level (dB(A) re 1 pW) according to EN 60704-3	74.0

DAW 1920 Active  
Wall mounted cooker hood  
with EasySwitch pushbuttons for convenient operation




EAN: 4002516657057 / Material number: 12178510 / Old Material Number: 28W1920EGB

Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	64.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	40.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	50.0
Noise pressure level in Intensive level (dB(A) re 20 µPa) according to EN 60704-2-13	60.0

<b>Technical data</b>	
Overall hood height for extraction mode and external in mm	673–993
Overall hood height for recirculation and external in mm	803–1123
Overall height for vented and external in in. (mm)	673
Canopy width in mm	898
Overall height for extraction mode and external mode cooker hoods in mm	993
Canopy height in mm	50
Overall height for recirculation in in. (mm)	803
Canopy depth in mm	500
Overall height for recirculation mode cooker hoods in mm	1123
Minimum height above electric hobs in mm	450
Net weight in kg	15.0
Length of supply lead in m	1.4
Standard plug fitted	•
Total rated load in kW	0.24
Voltage in V	230
Fuse rating in A	10
Number of phases	1
Frequency in Hz	50
<b>Installation notes</b>	
Extraction ducting connection at top	•
Extraction connection at top and rear	•
Diameter of exhaust duct in mm	150
Telescopic chimney	•
<b>Accessories included</b>	
Non-return flap	•
<b>Optional accessories</b>	
Active charcoal filter	Nein

DAW 1920 Active  
Wall mounted cooker hood  
with EasySwitch pushbuttons for convenient operation

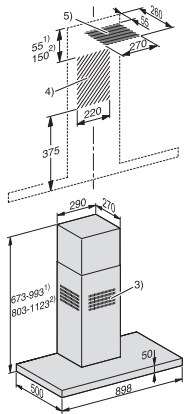

DAW1920, DAW1922W Living, Installation drawings

1) Extraction, 2) Recirculation, 3) Ventilation grille positioned at the top for recirculation, 4+5) Installation area (only 4 required for recirculation mode)