

## DA 6698 D Puristic Version 6000

### Island décor hood

with energy-efficient LED lighting and touch controls for simple operation.



- Family design – based on Miele built-in appliances
- Unique user convenience – Con@ctivity
- Powerful – ?? in Booster level
- Energy-efficient and quiet
- Energy-efficient and quiet

EAN: 4002516024675 / Material number: 10877240 /

Old Material Number: 28669845USA

<b>Construction type and design</b>	
Color	Obsidian black
<b>Design</b>	
Island ventilation hood	•
<b>Operating modes</b>	
Recirculated mode	Can be retrofitted
Recirculation conversion kit (order separately)	DUI 32
OdorFree charcoal filter (order separately)	DKF 12-P
<b>User convenience</b>	
Miele@home	•
Electronic controls	•
Power levels (number excl. Intensive)	3
Touch controls	•
Booster levels	1
Programmable Intensive switch-off	•
Delayed shutdown for 5 or 15 minutes	•
Grease filter saturation indicator	•
Active charcoal filter saturation indicator	•
Acoustic package	•
<b>Cleaning convenience</b>	
Easy-to-clean CleanCover hood liner	•
<b>Filter system</b>	
Number of dishwasher-safe stainless-steel grease filters	3
<b>Lighting</b>	
LED	•
Number x W	4 x 3 W
Light intensity in Lx	820 lx
Color temperature in K	3500 Kelvin
Light dimmer function	•
<b>Blower</b>	
Dual-action blower	•
AC motor	•
<b>Exhaust air</b>	
Maximum air throughput in cfm according to HVI	430
Air throughput	Values upon request
<b>Safety</b>	
Safety shut-off	•
Single-ply safety glass (ESG)	•
<b>Technical data</b>	
Overall min. height for vented and external in in. (mm)	27 7/8 (705)
Canopy width in in.(mm)	35 3/8 (898)
Overall max. height for vented and external in in. (mm)	39 5/8 (1005)
Canopy height in in.(mm)	3 3/8 (85)
Overall min. height for recirculation in in. (mm)	30 1/8 (765)
Canopy depth in in.(mm)	23 5/8 (598)
Overall max. height for recirculation in in. (mm)	42 3/8 (1075)
Net weight in lbs. (kg)	78 (35.0)
Hard-wired	•

## DA 6698 D Puristic Version 6000

### Island décor hood

with energy-efficient LED lighting and touch controls for simple operation.




EAN: 4002516024675 / Material number: 10877240 /  
Old Material Number: 28669845USA

Minimum distance above electric cooktops in in. (mm)	24 1/8 (610)
Minimum height above gas cooktop (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	26 (660)
Number of phases	1
Total connected load in kW	0.36
Voltage in V	120
Fuse rating in A	15
Frequency in Hz	60
<b>Installation note</b>	
Vent connection at top	•
Diameter of vent connection in in.(mm)	6 (150)
Telescopic chimney	•
<b>Standard accessories</b>	
Communication module for Con@ctivity XKM 2000 DA	XKS 3000 Z
Non-return flap	•

## DA 6698 D Puristic Version 6000

### Island décor hood

with energy-efficient LED lighting and touch controls for simple operation.

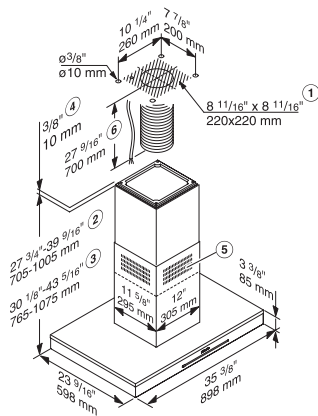

DA 6698 D, CLST (Installation drawing) – USA

- 1) Extraction cut-out, 2) Extraction, 3) Recirculation, 4) Installation option with spacer frame, 5) Ventilation grille at the top for recirculation, 6) A mains cable and, for extraction mode, flexible exhaust ducting is required from the ceiling connection to the connection on the cooker hood., ,