


PRI 214 [EL STW]

Rotary iron, electric

with motor, the latest controls and flexible working height.

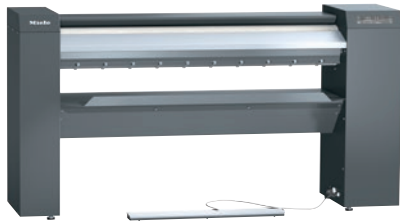

- Performance 61.7 (28.0) lb/h (kg/h) kg/h*, roller diameter 8 5/16 (210) in (mm), working width 55 1/8 (1400) in (mm)
- Ideal ergonomics – height-adjustable and optional base
- State-of-the-art controls – Touch display
- Selection of the most important settings – favorite programs
- Perfect rotary ironing performance – flexibly positioned heater plate

* With 25% residual moisture – performance data according to DIN 11 902: The achievable laundry throughput depends on overall conditions such as, for example, the type of laundry and the experience of the operator.


EAN: 4002516422938 / Material number: 11744620 /
Old Material Number: 53214009NAM

Construction type and design	
Design	Infeed and outfeed of laundry at the front
Can be set up against a wall	•
Linie	Professional
Outer casing	Iron Grey
Drum diameter in in.(mm)	8 5/16 (210)
Working width in in.(mm)	55 1/8 (1400)
Heater plate material	Aluminium
Padding	Supple steel wool
Ironer cover	ARAMID needle-felt cloth
Application	
Suitable for the hotel and catering industry	•
Suitable for retirement and care homes	•
Suitable for hospitals	•
Suitable for off-shore use	•
Suitable for Marine use	•
Performance data	
Max. ironing performance at 25 % residual moisture in lb/h (kg/h)	61.7 (28.0)
Tested operating hours	20000
Control	
Control system	Touch display
Touch display (optional)	Touch-Display PRI
Program setting	Setting of defined program parameters
Minimum ironer speed, can be set in ft/min	1.5
Maximum ironer speed, can be set in ft/min	4.0
Adjustable temperature	Infinitely variable
Standard electrical connection	
Type of heating	Electric
Electrical connection	3 AC 240V 50-60HZ
Electric heater rating in kW	7.10
Total connected load in kW	7.60
Fuse rating in A	30
Possible voltage variant 1	
Electrical connection	3 AC 220V 50-60HZ
Electric heater rating in kW	6.00
Total connected load in kW	6.50
Fuse rating in A	30
Possible voltage variant 2	
Electrical connection	3 AC 208V 50-60HZ
Electric heater rating in kW	5.30
Total connected load in kW	5.90
Fuse rating in A	30
Dimensions and weight	
External dimensions, height in mm	40 11/16 (1032)
External dimensions, width in mm	77 15/16 (1979)

PRI 214 [EL STW]

Rotary iron, electric

with motor, the latest controls and flexible working height.

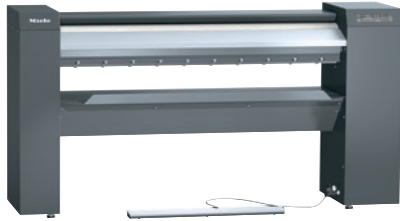

EAN: 4002516422938 / Material number: 11744620 /

Old Material Number: 53214009NAM

External dimensions, depth in mm	25 5/8 (650)
External dimensions, gross height in inches	54 1/8 (1374)
External dimensions, gross width in inches	85 3/16 (2163)
External dimensions, gross depth in inches	26 (660)
Net weight in kg	309 (140)
Gross weight in lbs.	342 (155)
Maximum floor load in N	1400

Emission values

Emissions – sound pressure at workplace	<70 dB(A) re 20 µPa
Heat dissipation into the room in MJ/h	7.10

Features

Automatic finger guard/finger guard	•
FlexControl footswitch	•
Feed-in board	•
Laundry pick-off bands	•
Laundry crates	•
Laundry return feed	•
Favorites program	•
Incorrect feed recognition	•
Air suspension	•
Pause function	•
High contact pressure	•
Heater plate cleaning and waxing indicator	•
Plinth (optional)	•
Option of ironing when seated	•
APRI 319 care set for the heater plate included in the scope of delivery	•
Appliance-independent accessories	•

Efficiency and sustainability

Recycling rate in %	98
---------------------	----

Connection options

Payment system (optional)	•
Peak-load negotiation / energy management	•

Standards, test certificates, and symbols

Complies with Machinery Directive 2006/42/EC	•
--	---