DAS 4940
Slimline cooker hood
for installation in narrow wall units with EasySwitch controls

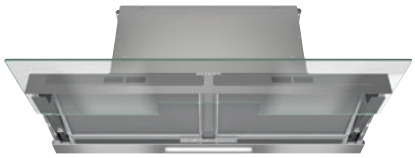

- Perfect combination with Con@ctivity-enabled hobs
- Light design – transparent glass panel, 90 cm wide
- LED strip for uniform lighting
- Efficient filtration- 10-ply stainless-steel grease filter
- Recirculation mode – Active AirClean or Longlife AirClean filter

EAN: 4002516496373 / Material number: 11862280 / Old Material Number: 28S4940TD

| | |
|---|---|
| **General information** | |
| Model identifier | DAS 4940 |
| Manufacturer material number | 11862280 |
| EAN number | 4002516496373 |
| Marketing class | Gold |
| **Construction type** | |
| Slimline cooker hood | • |
| **Construction type and design** | |
| Colour | Transp. glass |
| **Operating modes** | |
| Type of air guide | Can be retrofitted |
| Recirculation conversion kit (order separately) | DUU 151 |
| Active charcoal filter (order separately) | DKF 31-P, DKF 31-R |
| **User convenience** | |
| Miele@home | • |
| Electronic controls | • |
| Con@ctivity | Yes |
| Touch-on-glass controls | • |
| Booster levels | 1 |
| Run-on time 5/15 min. | • |
| Grease filter saturation indicator | • |
| Active charcoal filter saturation indicator | • |
| **Efficiency** | |
| Energy efficiency class (A+++ – D) | A++ |
| PowerManagement system | • |
| Annual energy consumption in kWh/year | 24,8 |
| Fluid dynamic efficiency class | A |
| Lighting efficiency class | A |
| Grease filtering efficiency class | B |
| **Cleaning and care** | |
| Easy-to-clean canopy interior – CleanCover | • |
| **Filter system** | |
| Number of dishwasher-safe stainless steel grease filters (10-ply) | 2 |
| **Lighting** | |
| Number x W | 1 x 3 W |
| Light intensity in Lx | 285 lx |
| Colour temperature in K | 3500 Kelvin |
| Dimmer function | • |
| **Fan** | |
| Dual-action fan | • |
| **Exhaust air** | |
| Air throughput in Level 1 ($m^3/h$) according to EN 61591 | 200 |
| Air throughput in Level 2 ($m^3/h$) according to EN 61591 | 290 |
| Air throughput in Level 3 ($m^3/h$) according to EN 61591 | 400 |
| Air throughput in Booster level ($m^3/h$) according to EN 61591 | 625 |
| Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3 | 36,0 |

DAS 4940
Slimline cooker hood
for installation in narrow wall units with EasySwitch controls

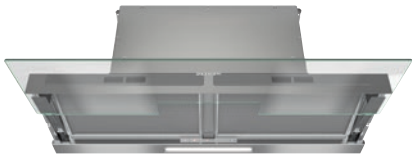

EAN: 4002516496373 / Material number: 11862280 / Old Material Number: 28S4940TD

| | |
|---|---|
| Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3 | 44,0 |
| Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3 | 51,0 |
| Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3 | 62,0 |
| Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13 | 22,0 |
| Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13 | 30,0 |
| Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13 | 38,0 |
| Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13 | 48,0 |
| **Recirculation** | |
| Air throughput in Level 1 ($m^3/h$) according to EN 61591 | 175 |
| Air throughput in Level 2 ($m^3/h$) according to EN 61591 | 270 |
| Air throughput in Level 3 ($m^3/h$) according to EN 61591 | 425 |
| Air throughput in Booster level ($m^3/h$) according to EN 61591 | 610 |
| Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3 | 41,0 |
| Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3 | 50,0 |
| Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3 | 61,0 |
| Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3 | 70,0 |
| Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13 | 28,0 |
| Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13 | 36,0 |
| Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13 | 47,0 |
| Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13 | 56,0 |
| **Safety** | |
| Safety switch-off | • |
| Single-ply safety glass (ESG) | • |
| **Technical data** | |
| Canopy width in mm | 861 |
| Canopy height in mm | 68 |
| Canopy depth in mm | 307 |
| Minimum height above electric hobs in mm | 450 |
| Net weight in kg | 15,0 |
| Length of supply lead in m | 1,5 |
| Standard plug fitted | • |
| Total rated load in kW | 0,08 |
| Voltage in V | 230 |
| Fuse rating in A | 10 |
| Number of phases | 1 |
| Frequency in Hz | 50 |

DAS 4940
Slimline cooker hood
for installation in narrow wall units with EasySwitch controls

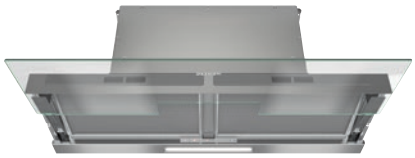

EAN: 4002516496373 / Material number: 11862280 / Old Material Number: 28S4940TD

| Installation notes | |
|---|---|
| Extraction ducting connection at top | • |
| Extraction connection at top and rear | • |
| Diameter of exhaust duct in mm | 150 |
| Fitting template | • |
| **Accessories included** | |
| Non-return flap | • |

# DAS 4940

## Slimline cooker hood
## for installation in narrow wall units with EasySwitch controls

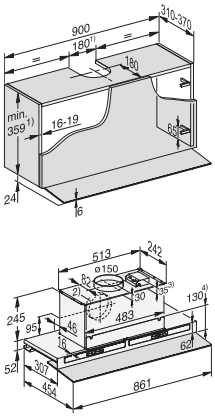





DAS4940, Installation drawings

1) Extraction, recirculation with conversion kit DUU 150., 2) Alternative ducting connection to the rear., 3) Accessory DSM module., 4) The wall unit can be fitted with a partition after installation. The slots for the grease filters and, in recirculation mode, for the odor filters must remain accessible., The height of the wall unit and the cut-out dimensions must take into account any accessories fitted (e.g. silencer, recirculation hood conversion kit, DSM module)