

DAW 1920 Active
Wall mounted cooker hood
with EasySwitch pushbuttons for convenient operation



- Timeless design – stainless steel canopy 898 mm wide
- Powerful – 645 m³/h in Booster level
- LED strip for uniform lighting
- Effective filtration – 10-ply aluminium metal grease filter
- Suitable for every home – for extraction or recirculation

EAN: 4002516588436 / Material number: 12061590 / Old Material Number: 28W1920ED

Construction type	
Wall mounted cooker hood	•
Operating modes	
Type of air guide	Can be retrofitted
Active charcoal filter (order separately)	DKFS 36-P
Design	
Colour	Stainless steel
User convenience	
Electronic controls	•
Touch-on-glass controls	•
Efficiency and sustainability	
Energy efficiency class (A+++ – D)	A
Annual energy consumption in kWh/year	49,8
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	B
Filter system	
Number of dishwasher-safe metal grease filters	3
Lighting	
LED	•
Number x W	1 x 3,2 W
Light intensity in lx	350 lx
Colour temperature in K	3500 Kelvin
Fan	
Dual-action fan	•
AC motor	•
Exhaust air	
Air throughput in Level 1 (m ³ /h) according to EN 61591	255
Air throughput in Level 2 (m ³ /h) according to EN 61591	400
Air throughput in Booster level (m ³ /h) according to EN 61591	645
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	53,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	62,0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	71,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	39,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	48,0
Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	57,0
Recirculation	
Air throughput in Level 1 (m ³ /h) according to EN 61591	235
Air throughput in Level 2 (m ³ /h) according to EN 61591	390
Air throughput in Booster level 1 (m ³ /h) according to EN 61591	620
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	54,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	64,0

DAW 1920 Active
Wall mounted cooker hood
with EasySwitch pushbuttons for convenient operation



EAN: 4002516588436 / Material number: 12061590 / Old Material Number: 28W1920ED

Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	74,0
-------------------------------------------------------------------	------

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	40,0
------------------------------------------------------------------------	------

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	50,0
------------------------------------------------------------------------	------

Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	60,0
---------------------------------------------------------------------------	------

Technical data

Overall hood height for extraction mode and external in mm	673–993
------------------------------------------------------------	---------

Overall hood height for recirculation and external in mm	803–1123
----------------------------------------------------------	----------

Overall height for vented and external in in. (mm)	673
----------------------------------------------------	-----

Canopy width in mm	898
--------------------	-----

Overall height for extraction mode and external mode cooker hoods in mm	993
-------------------------------------------------------------------------	-----

Canopy height in mm	50
---------------------	----

Overall height for recirculation in in. (mm)	803
----------------------------------------------	-----

Canopy depth in mm	500
--------------------	-----

Overall height for recirculation mode cooker hoods in mm	1123
----------------------------------------------------------	------

Minimum height above electric hobs in mm	450
------------------------------------------	-----

Net weight in kg	15,0
------------------	------

Length of supply lead in m	1,4
----------------------------	-----

Standard plug fitted	•
----------------------	---

Total rated load in kW	0,24
------------------------	------

Voltage in V	230
--------------	-----

Fuse rating in A	10
------------------	----

Number of phases	1
------------------	---

Frequency in Hz	50
-----------------	----

Installation notes

Extraction ducting connection at top	•
--------------------------------------	---

Extraction connection at top and rear	•
---------------------------------------	---

Diameter of exhaust duct in mm	150
--------------------------------	-----

Telescopic chimney	•
--------------------	---


Accessories included

Non-return flap	•
-----------------	---

Optional accessories

Active charcoal filter	Nein
------------------------	------

DAW 1920 Active
Wall mounted cooker hood
with EasySwitch pushbuttons for convenient operation

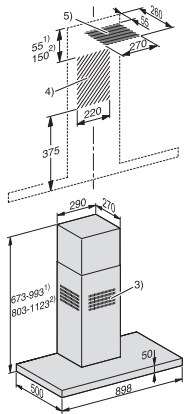

DAW1920, DAW1922W Living, Installation drawings

1) Extraction, 2) Recirculation, 3) Ventilation grille positioned at the top for recirculation, 4+5) Installation area (only 4 required for recirculation mode)