

DAW 1620 Active
Wall mounted cooker hood
with EasySwitch pushbuttons for convenient operation



- Timeless design – stainless steel canopy 598 mm wide
- Powerful – 640 m³/h in Booster level
- LED strip for uniform lighting
- Effective filtration – 10-ply aluminium metal grease filter
- Suitable for every home – for extraction or recirculation

EAN: 4002516588429 / Material number: 12061600 / Old Material Number: 28W1620ED

Construction type	
Wall mounted cooker hood	•
Operating modes	
Type of air guide	Can be retrofitted
Active charcoal filter (order separately)	DKFS 36-P
Design	
Colour	Stainless steel
User convenience	
Electronic controls	•
Touch-on-glass controls	•
Efficiency and sustainability	
Energy efficiency class (A+++ – D)	A
Annual energy consumption in kWh/year	49,9
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	B
Filter system	
Number of dishwasher-safe metal grease filters	2
Lighting	
LED	•
Number x W	1 x 3,2 W
Light intensity in lx	390 lx
Colour temperature in K	3500 Kelvin
Fan	
Dual-action fan	•
AC motor	•
Exhaust air	
Air throughput in Level 1 (m ³ /h) according to EN 61591	250
Air throughput in Level 2 (m ³ /h) according to EN 61591	395
Air throughput in Booster level (m ³ /h) according to EN 61591	640
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	52,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	62,0
Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	71,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	38,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	48,0
Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	57,0
Recirculation	
Air throughput in Level 1 (m ³ /h) according to EN 61591	235
Air throughput in Level 2 (m ³ /h) according to EN 61591	390
Air throughput in Booster level 1 (m ³ /h) according to EN 61591	620
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	53,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	64,0


DAW 1620 Active
Wall mounted cooker hood
with EasySwitch pushbuttons for convenient operation



EAN: 4002516588429 / Material number: 12061600 / Old Material Number: 28W1620ED

Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	74,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	39,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	50,0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	60,0
Technical data	
Overall hood height for extraction mode and external in mm	673–993
Overall hood height for recirculation and external in mm	803–1123
Overall height for vented and external in in. (mm)	673
Canopy width in mm	598
Overall height for extraction mode and external mode cooker hoods in mm	993
Canopy height in mm	50
Overall height for recirculation in in. (mm)	803
Canopy depth in mm	500
Overall height for recirculation mode cooker hoods in mm	1123
Minimum height above electric hobs in mm	450
Net weight in kg	13,4
Length of supply lead in m	1,4
Standard plug fitted	•
Total rated load in kW	0,24
Voltage in V	230
Fuse rating in A	10
Number of phases	1
Frequency in Hz	50
Installation notes	
Extraction ducting connection at top	•
Extraction connection at top and rear	•
Diameter of exhaust duct in mm	150
Telescopic chimney	•
Accessories included	
Non-return flap	•
Optional accessories	
Active charcoal filter	Nein

DAW 1620 Active
Wall mounted cooker hood
with EasySwitch pushbuttons for convenient operation

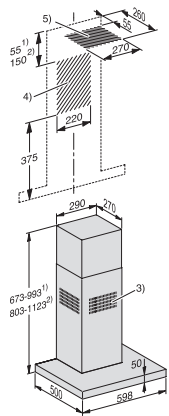

DAW1620, DAW1622W Living, Installation drawings

1) Extraction, 2) Recirculation, 3) Ventilation grille positioned at the top for recirculation, 4+5) Installation area (only 4 required for recirculation mode)