

KWT 4995 F
 Freestanding wine unit
 with PresenterFrame, FlexiFrame and three separate temperature zones.



- Your favourite wines are presented in style thanks to PresenterFrame
- Storage of all bottle sizes/shapes thanks to FlexiFrame
- Perfect drinking and storage temperatures thanks to separate temperature zones
- Perfect regulation of humidity with ActiveHumidity
- UV-resistant insulated glass
- Protect your favourite wines with an integrated door lock

EAN: 4002516612414 / Material number: 12156840 / Old Material Number: 39499562EU1

Appliance category	
Wine conditioning unit	•
Construction type	
Freestanding appliance	•
Door hinge	right
Convertible door hinging	•
Design	
Casing colour	BlackSteel
Front colour	Obsidian Black glass
Wine compartment lighting	continuously dimmable LED
User convenience	
Networking with Miele@home	•
SoftClose	•
Concealed door opener	SideOpen
Silence system	•
Number of shelves	11
Shelf material	Beechwood
Number of FlexiFrame racks	11
SelfClose FlexiFrame	•
NoteBoard	Yes
PresenterFrame	•
Low-vibration storage	•
Control system	
Operating concept	FreshTouch
Independent temperature regulation of fridge and freezer zones	No
No. of temperature zones	3
Min. temperature setting range in °C	5
Max. temperature setting range in °C	20
Sabbath mode	•
Fridge/Fridge section	
Dry back wall	BlackSteel
ActiveHumidity	•
Efficiency and sustainability	
Energy efficiency class (A–G)	F
Annual energy consumption in kWh	144,18
Energy consumption in 24 h in kWh	0,39
Safety	
Door lock	•
Acoustic door alarm	•
Acoustic temperature alarm	•
Optical temperature alarm	•
Technical data	
Appliance width in mm	697
Appliance height in mm	2013
Appliance depth in mm	764
Weight in kg	154,3
Climate class	SN-ST
Wine compartment in l	562
Total usable capacity in l	562


KWT 4995 F
Freestanding wine unit
with PresenterFrame, FlexiFrame and three separate temperature zones.



EAN: 4002516612414 / Material number: 12156840 / Old Material Number: 39499562EU1


0.75 l Bordeaux bottle capacity (no. of bottles)	184 bottles
Acoustic airborne noise emission class (A–D)	B
Sound emissions in dB(A) re 1 pW	35
Current consumption (mA)	1200
Voltage in V	220-240
Fuse rating in A	10
Number of phases	1
Frequency in Hz	50-60
Length of supply lead in m	2,0
Accessories included	
Active AirClean filter	•
White chalk pen	•

KWT 4995 F
 Freestanding wine unit
 with PresenterFrame, FlexiFrame and three separate temperature zones.

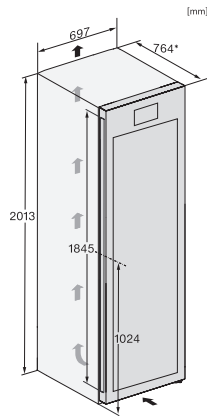


KWT4999F obsw, KWT4995F obsw, Rioja, installation sketch (footnote*) (installation drawings)

*To achieve the declared energy consumption, the spacers supplied with the unit must be used. This increases the depth of the unit by approx. 15 mm. The unit is fully functional without the use of the spacers, but has a slightly higher energy consumption.

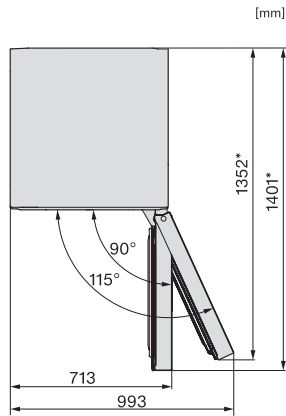

KWT4999F obsw, KWT4995F obsw, Rioja, top view (footnote*) (installation drawings)

*To achieve the declared energy consumption, the spacers supplied with the unit must be used. This increases the depth of the unit by approx. 15 mm. The unit is fully functional without the use of the spacers, but has a slightly higher energy consumption.

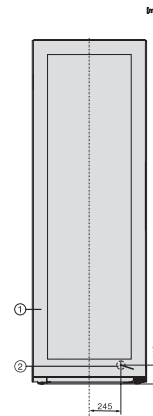

KWT4999F obsw, KWT4995F obsw, Rioja, installation (footnote*) (installation drawings)

*1. View from the front, 2. Mains connection cable, L = 2200 mm