

DA 2450-1

Extractor unit

with energy-efficient LED lighting and rotary dials for easy use



- Customised kitchen design – fully integrated in 532 mm width
- Powerful – 590 m³/h at the highest level
- Efficient filtration- 10-ply stainless-steel grease filter
- Safe and easy to clean – Miele CleanCover
- Suitable for every home – for extraction or recirculation

EAN: 4002516718307 / Material number: 12349760 / Old Material Number: 28245056D

Construction type	
Integrated extractor	•
Construction type and design	
Colour	Stainless steel
Operating modes	
Type of air guide	Can be retrofitted
Active charcoal filter (order separately)	DKF 15-P
User convenience	
Electronic controls	•
Rotary knob	•
Power levels (number without Booster level)	2
Booster levels	1
Efficiency and sustainability	
Annual energy consumption in kWh/year	52,6
Energy efficiency class (A+++ – D)	A
Grease filtering efficiency class	B
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Cleaning and care	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	1
Lighting	
LED	•
Number x W	2 x 3 W
Light intensity in lx	330 lx
Colour temperature in K	3000 Kelvin
Fan	
Dual-action fan	•
AC motor	•
Exhaust air	
Air throughput in Level 1 (m ³ /h) according to EN 61591	230
Air throughput in Level 2 (m ³ /h) according to EN 61591	350
Air throughput in Level 3 (m ³ /h) according to EN 61591	590
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	47,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	54,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	66,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	32,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	40,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	52,0
Recirculation	
Air throughput in Level 1 (m ³ /h) according to EN 61591	185

DA 2450-1

Extractor unit

with energy-efficient LED lighting and rotary dials for easy use




EAN: 4002516718307 / Material number: 12349760 / Old Material Number: 28245056D

Air throughput in Level 2 (m ³ /h) according to EN 61591	305
Air throughput in Level 3 (m ³ /h) according to EN 61591	525
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	52,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	61,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	71,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	38,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	47,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	57,0
Technical data	
Canopy width in mm	532
Canopy height in mm	50
Canopy depth in mm	372
Net weight in kg	10,2
Length of supply lead in m	1,5
Standard plug fitted	•
Minimum height above electric hobs in mm	450
Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Number of phases	1
Total rated load in kW	0,22
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50
Installation notes	
Extraction ducting connection at top	•
Extraction connection at top and rear	•
Diameter of exhaust duct in mm	150
Accessories included	
Non-return flap	•

DA 2450-1

Extractor unit

with energy-efficient LED lighting and rotary dials for easy use

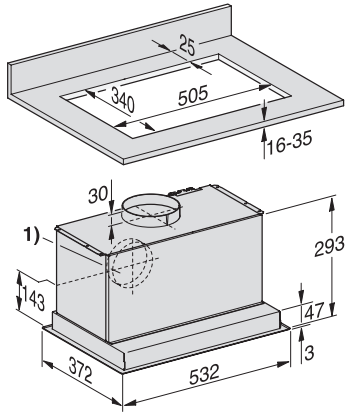

DA2450, DA2450-1, DA2558 (Installation drawing)

1) Vent connection alternatively to rear, You will find further detailed measurements in the instructions for use!