

H 7262 BP

Pećnica

sa zaslonom s tekстом, termometrom za hranu i pirolizom



- Zaslon s prikaz. teksta s uprav. senzorima – DirectSensor S
- Manje čišćenja – Piroliza
- Sasvim jednostavno do savršenih rezultata – Automatski programi
- Puno prostora i fleksibilnosti – 76 l vol. prostora na 5 razina
- Lako korištenje na svim razinama – FlexiClip vodilica

A+

EAN: 4002516360995 / Materijal: 11581230 / Stari broj materijala: 22726225D

Izvedba i dizajn	
Ugradbena pećnica	•
VitroLine	•
Boja uređaja	Opsidijan crna
Prednosti	
Brzo zagrijavanje	•
Termometar za hranu	s kabelom
Načini rada	
Odmrzavanje	•
Automatski programi	•
Automatika pečenja	•
Eco vrući zrak	•
Načini rada s roštiljem	•
Roštilj	•
Vrući zrak plus	•
Intenzivno pečenje	•
Gornji i donji grijač	•
Donji grijač	•
Roštilj s kruženjem zraka	•
Komfor pri korištenju	
Zaslon	DirectSensor S
SoftOpen	•
SoftClose	•
MultiLingua	•
Prikaz dnevnog vremena	•
Podsjetnik minuta	•
Programiranje vremena početka pripreme	•
Programiranje vremena završetka pripreme	•
Programiranje trajanja pripreme	•
Prikaz stvarne temperature	•
Prikaz željene temperature	•
Signalni ton pri postizanju potrebne temperature	•
Preporučena temperatura	•
Individualne postavke	•
Učinkovitost i održivost	
Razred energetske učinkovitosti (A+++ – D)	A+
Komfor pri održavanju	
Pirolitičko samočišćenje	•
Katalizator	•
Preklopni grijač roštilja	•
CleanGlass vrata	•
Sigurnost	
Sustav hlađenja s hladnom prednjom stranom uređaja	•
Sigurnosno isključivanje	•
Blokada uključivanja	•
Zaključavanje vrata pri uporabi pirolize	•
Tehnički podaci	
Volumen prostora za pripremu jela u l	76
Broj razina umetanja	5
Broj razina umetanja prostor za pripremu 1	5

H 7262 BP

Pećnica

sa zaslonom s tekстом, termometrom za hranu i pirolizom



EAN: 4002516360995 / Materijal: 11581230 / Stari broj materijala: 22726225D

Broj razina umetanja prostor za pripremu 2	5
Oznaka razina umetanja	•
Osvjetljenje prostora za pripremu jela	1 halogena sijalica
Min. temperature u °C	30
Maks. temperature u °C	300
Min. širina niše u mm	560
Maks. širina niše u mm	568
Min. visina niše u mm	590
Maks. visina niše u mm	595
Dubina niše u mm	550
Širina uređaja u mm	595
Visina uređaja u mm	596
Dubina uređaja u mm	568
Težina u kg	47,0
Temperature u °C	30–300
Ukupna priključna vrijednost u kW	3,60
Napon u V	220-240
Frekvencija u Hz	50
Broj faza	1
Osigurač u A	16
Priključni kabel s mrežnim utikačem	•
Duljina električnog kabela u m	1,50
Zamjena rasvjetnog tijela	Kupac
Isporučeni pribor	
Lim za pečenje s PerfectClean slojem	1
Univerzalni lim s PerfectClean slojem	1
Rešetka za pečenje i roštilj PyroFit	1
FlexiClip vodilice PyroFit (par)	1
Uklonjive bočne vodilice s PyroFit (par)	1
Raspoloživi jezici na zaslonu	
Raspoloživi jezici na zaslonu s MultiLingua	bahasa malaysia, dansk, deutsch, english, español, français, hrvatski, italiano, magyar, nederlands, norsk, polski, portugûês, русский, română, slovenčina, slovenščina, srpski, suomi, svenska, türkçe, українська, čeština, ελληνικά, , , , ,


H 7262 BP

Pečnica

sa zaslonom s tekstom, termometrom za hranu i pirolizom




H226x-1B/BP/E/EP/IP, H2760B/BP, H28x0B/BP, H7x6xB/BP/BPX installation drawings

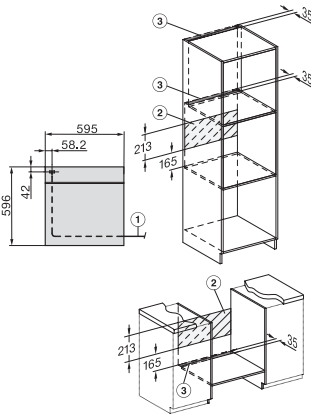


H226x-1B/BP/E/EP/IP, H2760B/BP, H28x0B/BP, H7x6xB/BP/BPX, installation drawings, GB, AUS




H2760B/BP, H28x0B/BP, H7x6xB/BP/BPX, DGC7351, DGC7151, installation drawings

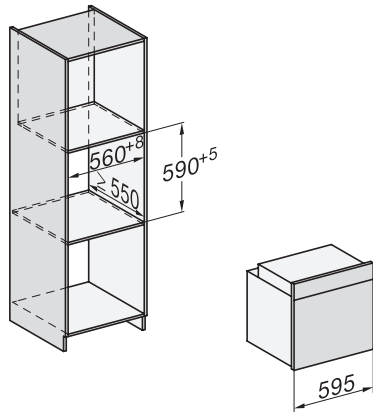


H226x-1B/BP/E/EP/IP, H2760B/BP, H28x0B/BP, H7x6xB/BP/BPX, installation drawings

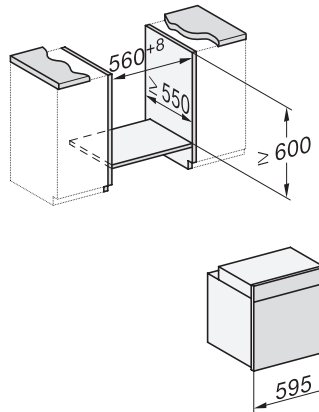


H226x-1B/BP/E/EP/IP, H2x6xB/BP, H7x6xB/BP/BPX, installation drawings

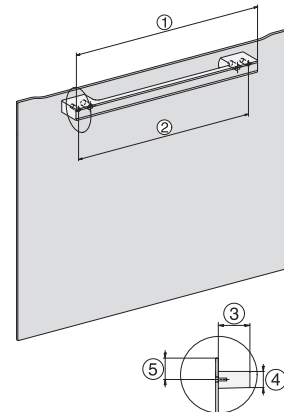


DG7x40, DGC7x4x, DGC7x6x, DG7635, DGM7x4x, DO7, H2860B/BP, H7240BM, H7x40BM, H7x4xB/BP, H7x6xB/BP, installation drawings

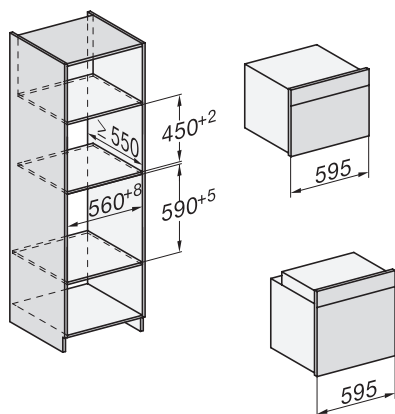

H226x-1B/BP/E/EP/IP, H2760B/BP, H28x0B/BP, H7x40BM/BMX, H7x6xB/BP/BPX, installation drawings

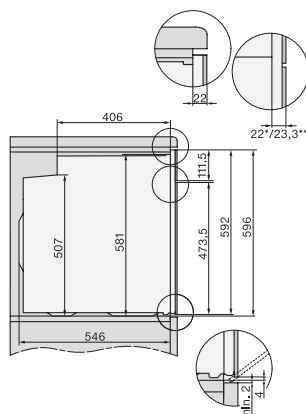

H2760B/BP, H28x0B/BP, H7x6xB/BP/BPX, installation drawings

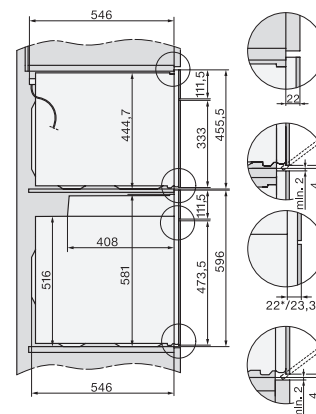

H2xxx-1 B/BP/E/EP/IP, H7xxx B/BP/BM/BMX, installation drawings

H 7262 BP

Pečnica

sa zaslonom s tekstom, termometrom za hranu i pirolizom



H2xxx-1 B/BP/E/I/IP, H7xxx B/BP/BM/BMX, installation drawings