



Miele

Miele Professional
laundry & dishwashing solutions
for successful business



Wherever innovative high-end products with an outstanding cleaning performance and high hygiene requirements are needed, Miele Professional is the first choice.



Miele Quality Pledges

Miele's global reputation for reliability is no accident

All our products undergo meticulous testing to simulate over ten years of continuous and rigorous use.



Our **washing machines** are tested to

30,000
cycles

that's the equivalent of 8 cycles a day,
7 days a week for over 10 years



The on/off switch on our **washing machines** and **tumble dryers** is tested to operate

100,000
times



Our **tumble dryers** are tested to

40,000
cycles



All our **ironers** are tested to operate for up to

20,000
hours



The fluff flap on our **tumble dryers** is opened and closed

10,000
times



The doors on our **dishwashers** are opened and closed

100,000
times



The doors on our **washing machines** are opened, closed, locked and unlocked

60,000
times



Our ProfiLine **dishwashers** are tested to

12,500
cycles



Our MasterLine **dishwashers** are tested to

28,000
cycles



All our **tumble dryers'** central bearing and support rollers operate for more than

20,000
hours

Built better **to last longer**

Sustainability through reliability

We don't want you to worry about the impact of raising energy prices, so we develop our products to lead the market for energy and water efficiency. Our machines last longer, too, so you will replace them less often, minimising environmental impact and disposal costs. When a machine comes to the end of its life, >90% of it is easily recyclable, ensuring maximum sustainability throughout our product life.

Sustainability check

Our machines are built better to last longer.

This enables you to save costs and lower the environmental impact of your business.

14% water and 17% energy savings with Miele Benchmark washers.

Our heat-pump dryers are overall **60% more efficient than conventional technologies.**

Smart technology enables dryers to stop when the optimal level of moist is achieved, saving energy and costs.

Your sustainability partner



United Nations
Global Compact

2004

Miele became a member of the UN Global Compact, promoting sustainability in business.




Zero Waste

Miele GB achieved Zero waste to landfill certification.




Carbon Neutral

We are carbon neutral in all of our locations, with the ambitious goal to achieve this across the complete lifecycle of our products.



15%

Committed to reduce CO₂ emissions by **15%** in the use phase of our products by 2030.



57%

Lower CO₂ since 2000.

We are here to help!

Our staff can advise on how to run your machines to their full potential reducing energy, water, and chemical consumption.

Miele Professional Service

Experience second to none

Miele Professional clients have access to a wide range of services, including pre-sale technical advice, planning and CAD drawings, economic feasibility studies, financing options, through to after-sales service.

We help you maintain your machines throughout time.

If something goes wrong we, or one of our approved partners, will be with you the same day or the next working day to make things right.

Miele MOVE

The digitalisation of laundry management

Break free from restrictions in laundry management and take the next step towards the digital analysis of machine performance: Miele MOVE uses intuitive interfaces and intelligent assistance tools to connect your machines, optimise your processes and reduce running costs.


M

Manage
your Miele Professional machines with useful tools which reduce time, cost and effort.

O


Optimise
workflow and improve security with intelligent features which streamline and automate processes.

V

Visualise
individual settings and savings potential with an intuitive interface which provides clear information on processes and performance.

E

Enable
greater process security and independence thanks to well designed functions which adapt to your individual requirements.

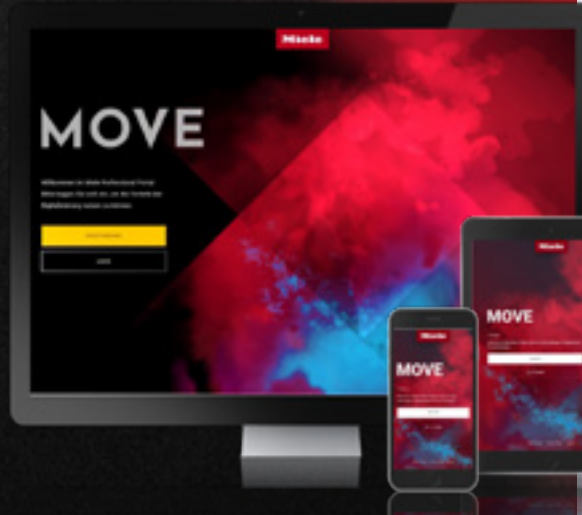

Miele MOVE has all the tools you need to remotely manage your laundry



Miele History & Innovation

Innovation has been at the heart of Miele's success for over 120 years

From the first fully automatic washing machine to the latest energy and water saving technology, we lead the way. When you buy a Miele machine you benefit from innovative, intelligent solutions that deliver reliable results.

Our drive to innovate is independently recognized too - we've won awards for everything from design through to the way we apply technology. When we design a new machine we think about how we can make it better - the details we can change to improve performance, increase efficiency and deliver the best results.

Innovation doesn't end with our products either - we're always looking at ways to improve the service we give to our customers, listening to you and being responsive to ensure that we're delivering the products and services you need.



Our offer is as **diverse as our client base**

**We empower businesses of all sizes
from a wide range of sectors**



Our clients include hotels and vacation sites, bars and restaurants, care homes, schools and student accommodation, laboratories, medical practices, laundrettes, veterinary practices and beauty spas. We work with them to identify the machines that best suit their needs and tailor machine programmes for top-quality results.

Washers

Hygienically clean laundry guaranteed.

Patented Honeycomb Drum

Ensures the gentle care of fabrics combined with first-class cleaning and drying performance.

Award winning Environmental Technology

Miele Professional washing machines are designed with the environment in mind. Low consumption values means valuable water, energy and detergent savings, in fact the new generation of Little Giants require 22% less water and 28% less energy. Adding to their sustainable credentials, 95% of the new Little Giants can be recycled at end of life.

Highest G-Force

A G-Force of up to 704 occurs during extraction in our Little Giants, reducing drying times, energy costs and extending the life of the garment.

Compliant

Our washing machines are compliant with machinery guidelines and some models are approved to regulation 4 certification.

Barrier Washers

Miele Professional barrier machines offer optimum physical separation between unclean and clean sides in care homes and hospitals, preventing re-contamination of laundry.

Large range of capacities catering for a wide market



6kg - 32kg
drum volumes



Specially designed
machines for
washing mops and
cloths



Barrier machines
for care homes
and hospitals



Marine and offshore
models of washers,
dryers, ironers and
dishwashers



Little Giants 6-8kg

Domestic size,
professional
performance



Ideal for:

- Small-medium care homes
- Veterinary practices
- Small to medium hotels and guest houses

Benchmark 9-11kg

Best performance for
medium-size loads



Ideal for:

- Medium sized hotels
- Medium sized care homes

Benchmark 12-32kg

For large and heavy loads



Ideal for:

- Large hotels
- Large care homes

Barrier washers 16-32kg

The zero-contamination
solution for the healthcare
sector



Ideal for:

- Hospitals
- Large care homes
- Medical centres

WASHERS

Little Giants 6-8 KG



Product Code

PWM 307
Evolution**PWM 506**
MopStar**PWM 507/508****PWM 507**
Hygiene**PWM 508**
MopStar**PWM 906**

Capacity (kg)

7

6

7 or 8

7

8

6

Dimensions: H/W/D (mm)

850/596/714

850/596/714

850/596/714

850/596/714

850/596/714

850/596/714

Net Weight (kg)

98

99

98

101

101

99

Heating

Electric

Electric

Electric

Electric

Electric

Electric

Controls

M Select

M Select

M Select

M Select

M Select

M Touch Flex

Spin Speed (rpm)

1600

1400

1600

1600

1400

1600

G Factor

704

535

704

704

535

704

Residual Moisture (%)

48

52

48

48

52

48

Drainage

Drain Pump

Drain Pump or Dump Valve

Drain Pump or Dump Valve

Dump Valve

Drain Pump or Dump Valve

Drain Pump

Electric Requirements: 230V

•

•

•

•

•

•

400V

-

•

-

•

•


•

Other Comments

Energy Rating: A
Available in white
StackableAvailable in white
Stackable
Special programs for
reprocessing of mops and
clothsEnergy Rating: A
Available in white or with
stainless steel front
StackableAvailable in white
StackableAvailable in white
Stackable
Special programs for
reprocessing of mops and
clothsAvailable in white
Stackable

Little Giants 6-8 KG

Benchmark 9-11 KG

**PWM 907****PWM 908****PWM 909****PDW 909 / PDR 909****PWM 511**

7

8

9

9

Dryer - PDR 909

9

11

850/596/714

850/596/714

1020/700/727

1352 / 799 / 940

1020/700/827

101

103

140

259

259

148

Electric

Electric

Electric

Electric

Electric

Electric

M Touch Flex

M Touch Flex

M Touch Pro Plus

M Touch Pro Plus

M Touch Pro

M Touch Pro

1600

1600

1300

1300

-

1100

704

704

520

520

-

370

48

48

44

49

-

50

Drain Pump or Dump Valve

Drain Pump or Dump Valve

Drain Pump or Dump Valve

Drain Pump

-

Drain Pump or Dump Valve

•

•

•

•

•

•

•

•

•

•

•

•

Stackable

Stackable

Available in Iron Grey

Available in Iron Grey

Available in Iron Grey or with

Available in Iron Grey

Available in white or with stainless steel front

Available in white or with stainless steel front

or with stainless steel front

or with stainless steel front

stainless steel front

Connection of optional accessories

Connection of optional accessories via Connector Box

Connection of optional accessories via Connector Box

Vented

Connection of optional accessories via Connector Box

via Connector Box

WASHERS

Benchmark 12-20 KG



Product Code

PWM 912

PWM 514

PWM 514 Mopstar

PWM 916

PWM 520

PWM 520 Mopstar

Capacity (kg)

12

14

14

16

20

20

Dimensions: H/W/D (mm)

1350/799/924

1350/799/995

1350/799/995

1450/924/835

1450/924/935

1450/924/935

Net Weight (kg)

271

276

276

337

389

389

Heating

Electric or steam

Electric

Electric

Electric or steam

Electric

Electric

Controls

M Touch Pro Plus

M Touch Pro

M Touch Pro Mop

M Touch Pro Plus

M Touch Pro

M Touch Pro Mop

Spin Speed (rpm)

1150

1025

1025

1075

950

950

G Factor

460

360

360

460

360

360

Residual Moisture (%)

44

49

>25

44

49

49

Drainage

Dump Valve

Dump Valve

Dump Valve

Dump Valve

Dump Valve

Dump Valve

Electric Requirements: 230V

-

-

-

-

-

-

400V

•

•

•

•

•

•

Other Comments

Connection of optional accessories via Connector Box

Connection of optional accessories via Connector Box

Connection of optional accessories via Connector Box

Connection of optional accessories via Connector Box

Connection of optional accessories via Connector Box

Connection of optional accessories via Connector Box

Benchmark 20-32 KG



16-32 KG Barrier Washers

**PWM 920****PW 6241****PW 6321****PW 6163****PW 6243****PW 6323**

20

24

32

16

24

32

1450/924/935

1640/1085/1265

1640/1085/1272

1718/1153/1070

1718/1384/1070

1718/1605/1070

389

640

648

630

820

860

Electric or steam

Electric, Gas or Steam

Electric, Gas or Steam

Electric, Steam or Dual

Electric, Steam or Dual

Electric, Steam or Dual

M Touch Pro Plus

Profitronic M

Profitronic M

Profitronic M

Profitronic M

Profitronic M

1075

1100

1000

1025

975

975

460

542

448

400

360

360

44

46

50

48

50

47

Dump Valve

Dump Valve

Dump Valve

Dump Valve

Dump Valve

Dump Valve

-

-

-

-

-

-

•

•

•

•

•

•

Connection of optional accessories via Connector Box

Data shown is for the electric versions

Data shown is for the electric versions

Tumble Dryers

Drying technology that saves energy and costs.

Patented Honeycomb Drum

Ensures the gentle care of fabrics combined with first-class cleaning and drying performance.

Residual Moisture Control Dryers

Accurate sensors that measure moisture in the garments to reduce drying times and lower energy costs.

Award winning Environmental Technology

New and innovative Heat Pump dryers and H₂O dryers reduce energy costs by over 50%.

Large range of capacities catering for a wide market

A capacity range of 7kg to up to 44kg drum volumes for our dryers meets the needs of businesses large and small.

H₂O Dryers

The H₂O dryer can be put to use wherever water is heated. This can take the form of an on-site cogeneration plant, district heating, bio-mass, or alternative sources of energy where hot water is a by-product.

Large range of capacities catering for a wide market



**7-44kg
drum volumes**



**Savings up to
50% in energy
consumption**



**Delicate
on garments**



Little Giants 7-8kg

Stackable above the Little Giants washers. Domestic size, professional performance

Benchmark 10-11kg

Medium-size drum for a variety of needs

Benchmark SlimLine 8-16kg

Space-saving shape to accommodate all

Large capacity 13-44kg

The ally of all businesses processing heavy loads every day



Ideal for:

- Small-medium care homes
- Veterinary practices
- Small to medium hotels and guest houses

Ideal for:

- Medium to Large Hotels
- Medium to Large Care homes
- Coin op
- Contract Cleaners

Ideal for:

- Large hotels
- Large care homes

Ideal for:

- Hospitals
- Large care homes
- Medical centres

TUMBLE DRYERS

Little Giants 7-8 KG



Product Code

**PDR 307 HP
Evolution**
**PDR 307
Evolution**
PDR 507/508 HP
PDR 507/508
PDR 908 HP
PDR 908

Capacity (kg)

7

7

7 or 8

7 or 8

8

8

Dimensions: H/W/D (mm)

850/596/777

850/596/717

850/596/777

850/596/717

850/605/777

850/605/717

Net Weight (kg)

68.5

49

68.5

49

72

52

Heating

Electric

Electric

Electric

Electric

Electric

Electric

Controls

M Select

M Select

M Select

M Select

M Touch Flex

M Touch Flex

Electric Requirements: 230V

•

•

•

•

•

•

400V

-

-

-

-

-

•

Other Comments

Energy Rating: A++
Available in white
Stackable
Heat Pump model

Energy Rating: C
Available in white
Stackable
Vented model

Energy Rating: A++
Available in white
Stackable
Heat Pump model

Energy Rating: C
Available in white
Stackable
Vented model

Available in white or
stainless steel
Stackable
Heat Pump model

Available in white or
stainless steel
Stackable
Vented model

Benchmark 10-16 KG



PDR 510	PDR 910	PDR 511 SL HP	PDR 514	PDR 914	PDR 914 HP	PDR 516 SL
10	10	8-11*	10-14	10-14	10-14*	12-16*
1020/700/763	1020/700/763	1800/711/1075	1400/906/852	1400/906/852	1400/906/1232	1800/711/1089
72	72	192	160	160	156	146(EL) /150(G)
Electric	Electric, Gas	Electric	Electric or Gas	Electric or Gas	Electric	Electric or Gas
M Select	M Touch Pro	M Select	M Select ROP	M Touch Pro	M Touch Pro	M Select
•	•	-	• (Gas)	• (Gas)	-	•
•	•	•	• (Electric)	• (Electric)	•	•

Available in Iron Grey
Vented
Connection of optional accessories via Connector Box

Available in White, Iron Grey or Stainless steel
Vented
Connection of optional accessories via Connector Box

Available in Iron Grey
Connection of optional accessories via Connector Box
Heat Pump integrated
*1:25 - 1:18kg

Connection of optional accessories via Connector Box
Iron Grey/Stainless Steel (EL only)
Vented model
Data shown is for the electric versions

Connection of optional accessories via Connector Box
Iron Grey/Stainless Steel (EL only)
Vented model
Data shown is for the electric versions

Connection of optional accessories via Connector Box
Iron Grey/Stainless Steel
Heat-Pump unit dimensions (H/W/D):1370/906/426
* 1:25 - 1:18kg

Available in Iron Grey
Vented model
Connection of optional accessories via Connector Box
COP models available
* 1:25 - 1:18kg

TUMBLE DRYERS

13-18 KG



16-22 KG



Product Code

PDR 518**PDR 918****PDR 918 HP****PDR 522****PDR 922**

Capacity (kg)

13-18

13-18

13-18*

16-22 (13-16 HW)

16-22 (13-16 HW)

Dimensions: H/W/D (mm)

1400/906/1035

1400/906/1035

1400/906/1415

1400/906/1164

1400/906/1164

Net Weight (kg)

174 (EL), 180 (G)

174 (EL), 180 (G), 208 (S,)

170

199 (EL), 204 (G), 232 (S, HW)

199 (EL), 204 (G), 232 (S, HW)

Heating

Electric, Gas

Electric, Gas Steam

Electric

Electric, Gas, Steam or HW

Electric, Gas, Steam or HW

Controls

M Select ROP

M Touch Pro

M Touch Pro

M Select ROP

M Touch Pro

Electric Requirements: 230V

• (Gas, HW)

• (Gas)

-

-

-

400V

• (Electric)

• (Electric)

•

•

•

Other Comments

Connection of optional accessories via Connector Box
Iron Grey/Stainless Steel (EL only)
Vented with AirRecycling system

Connection of optional accessories via Connector Box
Iron Grey/Stainless Steel (EL, S only)
Vented with AirRecycling (G), AirRecycling Flex (EL), AirRecycling Plus (S) system

Connection of optional accessories via Connector Box
Iron Grey/Stainless Steel
Heat-Pump unit dimensions (H/W/D):1370/906/426
* 1:25 - 1:18kg

Connection of optional accessories via Connector Box
Iron Grey
Vented with AirRecycling system
HW (Hot Water) for H20 model

Connection of optional accessories via Connector Box
Iron Grey/Stainless Steel (EL,S only)
Vented with AirRecycling (G), AirRecycling Flex (EL), AirRecycling Plus (HW, S) system
HW (Hot Water) for H20 model

16-22 KG

20-28 KG



32-44 KG

**PDR 922 HP****PDR 528****PDR 928****PDR 544****PDR 944**

16-22

20-28 (16-20 HW)

20-28 (16-20 HW)

32-44 (24-32 HW)

32-44 (24-32 HW)

1400/906/1164

1640/1206/1018

1640/1206/1018

1640/1206/1384

1640/1206/1384

TBC

243 (EL), 246 (G), 281 (S, HW)

243 (EL), 246 (G), 281 (S, HW)

294 (EL), 295(G), 326 (S,HW)

294 (EL), 295(G), 326 (S,HW)

Electric

Electric, Gas, Steam or HW

Electric, Gas, Steam or HW

Electric, Gas, Steam or HW

Electric, Gas, Steam or HW

M Touch Pro

M Select ROP

M Touch Pro

M Select ROP

M Touch Pro

-

-

-

-

-

•

•

•

•

•

Connection of optional accessories via
Connector Box

Iron Grey

Heat-Pump unit dimensions

(H/W/D):1370/906/426

* 1:25 - 1:18kg

Connection of optional accessories
via Connector Box

Iron Grey

Vented with AirRecycling system

HW (Hot Water) for H20 model

Connection of optional accessories via
Connector Box

Iron Grey/Stainless Steel (EL,S only)

Vented with AirRecycling (G),

AirRecycling Flex (EL), AirRecycling Plus

(HW, S) system

HW (Hot Water) for H20 model

Connection of optional accessories via
Connector Box

Iron Grey

Vented with AirRecycling system

HW (Hot Water) for H20 model

Connection of optional accessories via
Connector Box

Iron Grey/Stainless Steel (S only)

Vented with AirRecycling (G), AirRecycling

Flex (EL), AirRecycling Plus (HW, S)

system

HW (Hot Water) for H20 model

LAUNDRY DETERGENTS

ProCare Tex



Product Code

ProCare Tex 11
10kg & 20kg

ProCare Tex 10
5L, 10L & 20L

ProCare Tex 10 MA
5l, 10l & 20l

ProCare Tex 70 S
5l, 10l & 20l

Description

Multi-Purpose Detergent

Sole Detergent

For delicates & coloured items

Fabric Softener

Type

Powder

Liquid Concentrate

Liquid Concentrate

Liquid Concentrate

Range in kg of laundry

10kg: 830
20kg: 1660

5l: 780
10l: 15630
20l: 3120

5l: 660
10l: 1320
20l: 2640

5l: 1250
10l: 2500
20l: 5000

ProCare Tex

The complete solution for commercial laundries.

ProCare Tex detergents have been specifically designed by experts to work in harmony with Miele Professional laundry machines. The range offers high-quality and economic detergents that care for a wide range of textiles.

The range is kind to the environment too, being free from phosphates and microplastics. When ProCare Tex is used alongside our high-performance machines, you can be assured that you are receiving the best quality for your commercial laundry.



Control Panels



Our user interfaces are simple and designed to meet a wide range of needs. We think about the details when we programme your machine, setting wash temperatures, programme times and configurations. We make sure your favourite programmes are highlighted and that your staff is fully trained on which programme to use to deliver the results you need.



M-Select:

Performance Little Giants (PWM 50X & PDR 50X)
Performance Benchmark (PDR 51X, 52X & 54X)
Benchmark SlimLine dryers (PDR 511 SL HP & PDR 516 SL)

Convenient and approved control, adapted for the future.

Rotary dial for direct selection of washing/drying programmes accompanied by a crystal clear touch display to access additional functions and settings. Direct access to language selection via flag icon. Display can be accessed by user while wearing latex gloves.



M Touch Flex:

Performance Plus Little Giants (PWM 90X & PDR 90X)

M Touch Pro:

Performance Benchmark (PWM 511, 514 & 520,
PDR 909, 91X, 92X & 94X)

M Touch Pro Plus:

Performance Plus Benchmark (PWM 909, 912, 916 & 920, PDW 909)

Next level comfort and convenience.

Easy to use full colour and touch display. Conveniently select washing/drying programmes and machine functions with a fingertip via the clear text touch display. Programme colour coding for even easier selection of programmes. Swipe function for faster scrolling. Display can be accessed by user while wearing latex gloves.



Profitronic M:

PW 624X & 632X

Electronic controls with multi-function selector and user navigation screen.

199 programme slots. Programme selection via rotary selector or 6 short cut buttons. Freely programmable programme parameters. Clear text display with user navigation.

Commercial Ironers

Smooth, crease-free finish.

Optimum laundry finish

Miele rotary ironers are just the machines for a perfect finish on workwear and table linen: simple, fast and economical. In hotels and restaurants, perfectly laundered textiles help keep up appearances. Alongside guaranteeing a perfect finish, rotary ironers are above all simple and safe to use. Roller speed is infinitely selected using a rotary selector. Roller rotation can be stopped at any time by pressing the footswitch. The ARAMID cloth and the aluminium trough ensure efficient results.

The patented automatic finger guard stops the roller in its tracks and retracts the heater plate in the event that anything enters the gap between the roller and the trough. During power failures, the heater plate can be released easily to remove trapped items.

High Performance

Our high-performance flatwork ironers are able to process more than 200 kg of laundry per hour, equating to more than a tonne of laundry per day. These large ironers can be controlled and monitored from their central display, making them safe and easy to use. Contact pressure, temperatures and roller speeds are all selectable and can be saved with password protected user levels. The display also shows cleaning and waxing reminders when due.

Model designations PRI 318, 418 and 421 are available with electric, gas and steam heating and the touch display shows all the machine parameters at a single glance, allowing the ironer to adapt fast to everyday working conditions.



Table ironers

Steam systems for prolonged ironing times

Rotary ironers

Space-saving ironers for small laundry operations

Flatwork ironers

For large volumes of linen produced by hotels, care homes, and hospitals



IRONERS


Rotary Ironers

Ironing Tables



Product Code	HM 16-80	HM 16-83	Product Code	PIB 100
Roller diameter (mm)	160	160	Active ironing board	Fan which can be reversed to blow or draw air
Roller width (mm)	830	830	Large removable water tank	3 hours of ironing without refill
Heater plate	Electric	Electric	High-quality commercial grade ironing cloth	Heat-proof, colour-fast, high steam permeability, certified according to Öko-Tex-Standard 100
Throughput according to DIN 11902 (kg/h):			DLC coating on boiler	Descaling cycle 80l = approx. 1 month without descaling
Residual moisture 15%			Electric Requirements: 230V	•
Residual moisture 20%	13	15		
Residual moisture 25%				
Electric Requirements: 230V	•	•		
400V	-	-		
External dimensions H/W/D (mm)	959/985/380	960/1050/380		
Other Comments	Folding frame Steam Facility Return Feed	Return Feed		Simple set-up and storage with 1-2 lift system

Flatwork Ironers

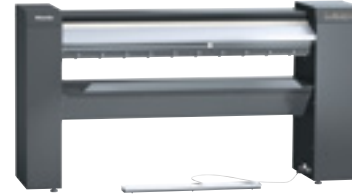

Product Code	PRI 210	PRI 214	PRI 217
Roller diameter (mm)	210	210	250
Roller width (mm)	1000	1400	1660
Heater plate	Electric	Electric	Electric
Throughput according to DIN 11902 (kg/h):			
Residual moisture 15%	30		
Residual moisture 20%			
Residual moisture 25%		33	60
Electric Requirements: 230V	•	-	-
400V	•	•	•
External dimensions H/W/D (mm)	1032/1579/476	1032/1979/650	1110/2238/650
	Return Feed	Return Feed	Return Feed and Through Feed

IRONERS

Flatwork Ironers



Product Code

PRI 318

PRI 418

PRI 421

Roller diameter (mm)

300

365

365

Roller width (mm)

1750

1750

2040

Heater plate

Electric or Gas

Electric or Gas

Electric or Gas

Throughput according to DIN 11902 (kg/h):

Residual moisture 15%

Residual moisture 20%

Residual moisture 25%

Electric Requirements: 230V

400V

External dimensions H/W/D (mm)

Other Comments

80 (EL) / 54 (G)

95 (EL) / 70 (G)

101 (EL) / 70 (G)

-

-

-

•

•

•

1110/2469/1377

1110/2469/1441

1110/2759/1441

Through feed (option of return feed module for existing machines)
Return feed (new machines, electric model only)

Through feed (option of return feed module for existing machines)
Return feed (new machines, electric model only)

Through feed (option of return feed module for existing machines)
Return feed (new machines, electric model only)



Dishwashers

Meeting the needs of the most stringent commercial and care environment.

Efficient

Extremely short programme cycles capable of completing full freshwater wash cycles in as little as 5 minutes.

Environmentally friendly

Intelligent programmes can be customised to optimise energy and water consumption.

High performance

Miele's unique freshwater system operates with fresh water in every cleaning cycle achieving high hygienic standards and low energy usage. Hygienic cleanliness is achieved with high rinse temperatures in excess of 80 degrees.

Dependable

All machines are compliant with machinery guidelines and the freshwater dishwashers are Regulation 4 Certified for reassurance.

Recommended

Our dishwashers are recommended by Riedel as the perfect machines to wash their delicate glassware.

The perfect partner


ProCare Shine is our very own range of cleaning agents and rinse aids, the perfect partner for your dishwasher.



**Cycles as short as
47 seconds**



**A range of
different inserts**



**Customisable
programmes**





Speed
for fast processing



Hygiene
for hygienically
clean results



Brilliant
for perfect shine



Universal
for the toughest
jobs in the busiest
workplaces

Tank


Fast cycle times processing up to >3,000 glasses and >1,200 plates per hour

MasterLine

The latest Miele freshwater dishwashers, meeting the demands of the hospitality and healthcare sectors

ProfiLine




Short cycle time for high volumes of crockery, ideal for offices, showrooms and large families

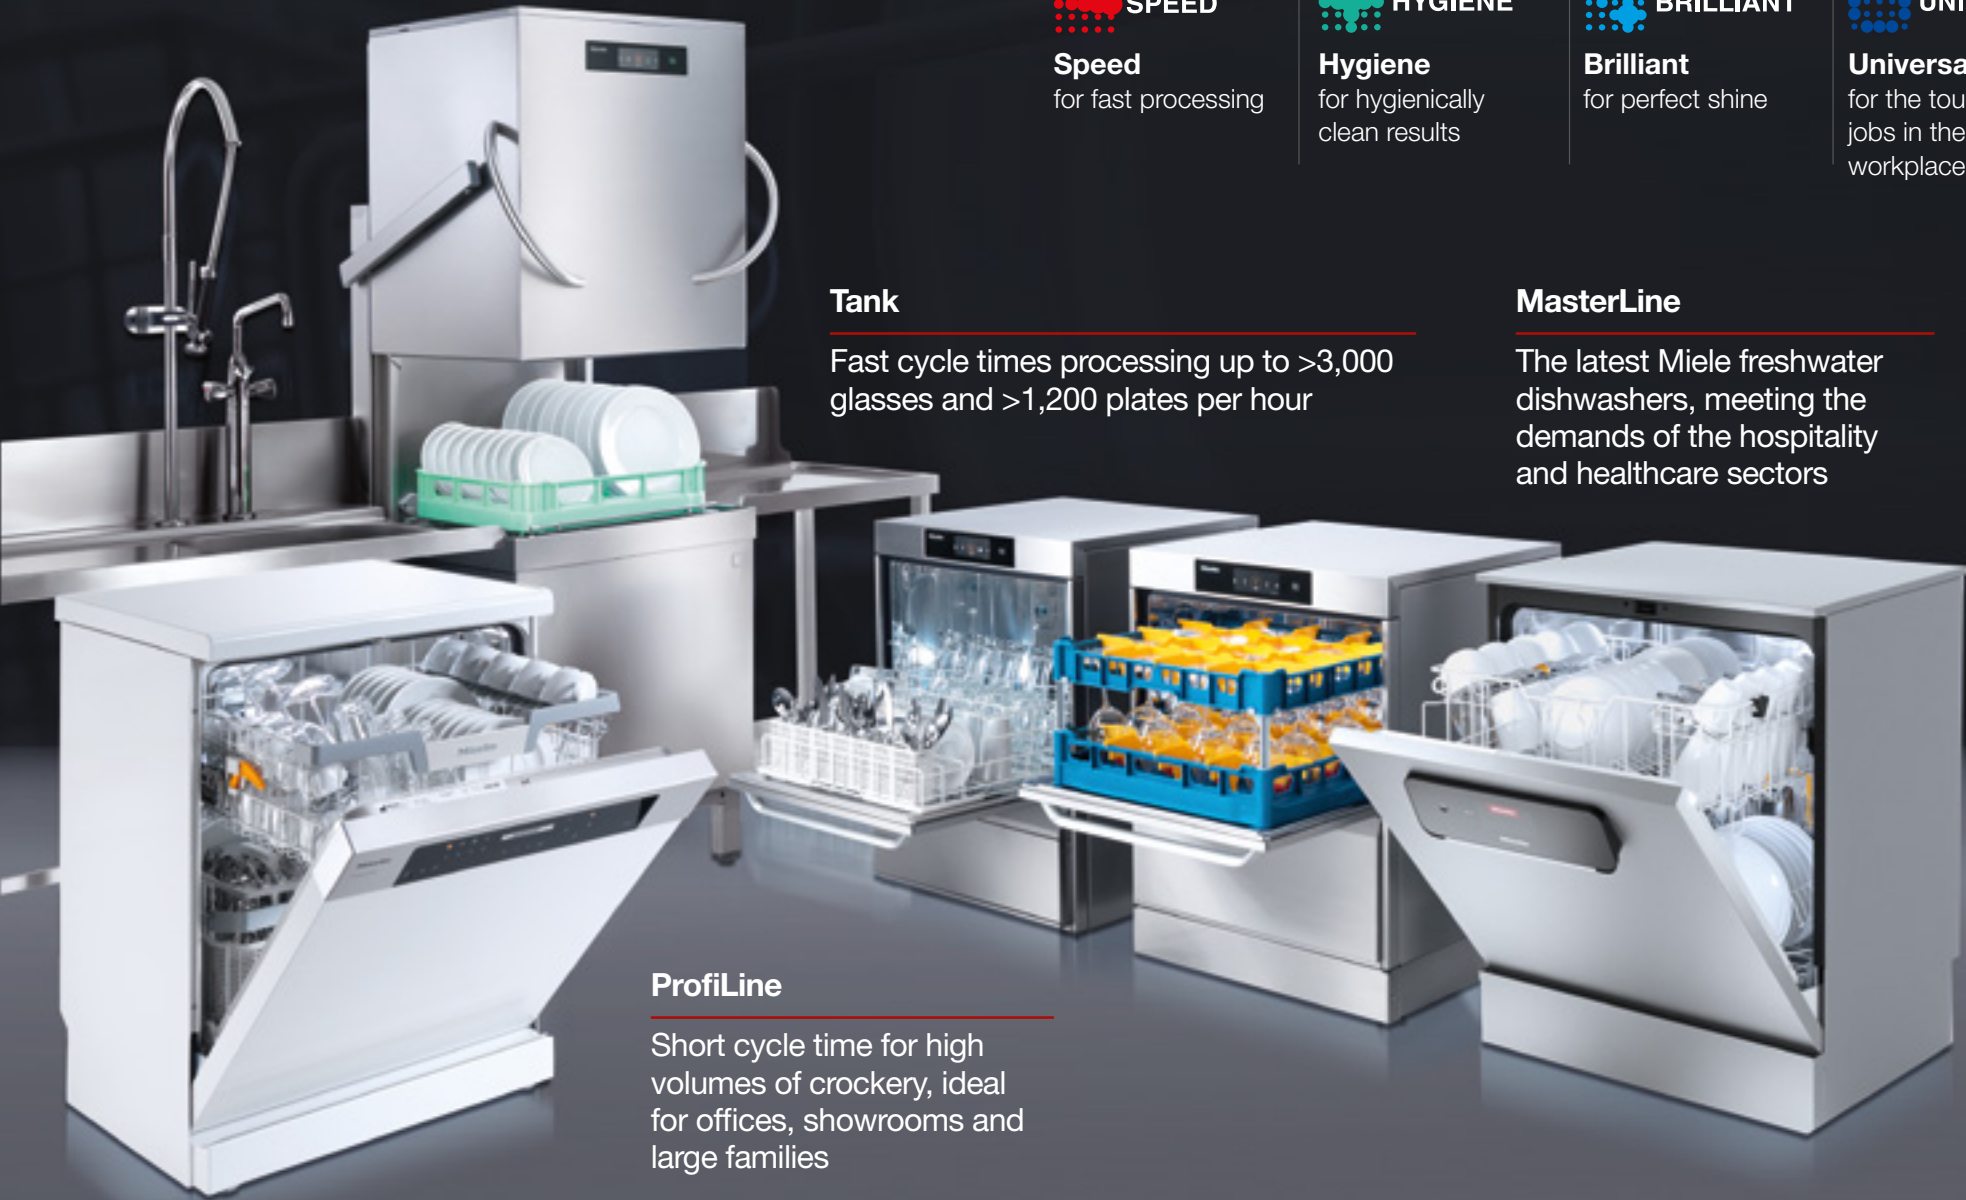

DISHWASHERS

ProfiLine Dishwashers

COMPLIANT
WITH MACHINERY
GUIDELINE
2006/42/EC



Product Code	PFD 101	PFD 101 U	PFD 101 i	PFD 103 SCi XXL	PFD 104 SCVi XXL
Dimensions: H/W/D (mm)	845/598/570	805/598/570	805/598/570	845/598/570	845/598/570
Net Weight (kg)	60	44	42	52	51
Type	Freestanding unit	Built under dishwasher*	Integrated dishwasher	Integrated dishwasher	Fully integrated
Dishwashing system	Freshwater system	Freshwater system	Freshwater system	Freshwater system	Freshwater system
Shortest programme cycle (mins from*)	18	36	18	18	18
Place settings per hour**	13	13	13	14	14
Dishwashing programmes	8	8	8	8	8
Final rinse temperature	82°C	82°C	82°C	82°C	82°C
Door lock	Auto Open	Auto Open	Auto Open	Auto Open	Auto Open
Energy Rating	E	E	E	E	E

* without laminate lid

*Cycle times will vary dependant on water and electrical supplies

**Place settings calculated at 14 items per setting

MasterLine Dishwashers

COMPLIANT
WITH MACHINERY
GUIDELINE
2006/42/EC




PFD 400 - Speed

PFD 401 - SpeedPlus

PFD 402 - SpeedAir

PFD 404 - Hygiene

PFD 405 - HygieneAir

835/598/580

835/598/580

835/598/580

835/598/598

835/598/580

75

75

78

78

78

Freestanding unit

Freestanding unit

Freestanding unit

Freestanding unit

Freestanding unit

Freshwater system

Freshwater system

Freshwater system

Freshwater system

Freshwater system

8

8

5

5

5

285

456

456

456

456

9

11

11

12

12

70°C

70°C

80°C

85°C

85°C

Easy Open

Easy Open

Easy Open

Auto Open

Auto Open

-

-

-

-

-

Only available
in whiteTwo water
connections
DOS optional, with
level-fill indicatorTwo water
connections
Dry+ dryingTwo water
connectionsTwo water
connections
DOS optional, with
level-fill indicator
Dry+ drying

DISHWASHERS

Tank Dishwashers



Product Code

PTD 701

PTD 702

PTD 703

PTD 901

Dimensions: H/W/D (mm)

725(760)/460/617

725(760)/600/617

820(855)/600/617

1535(2010)/635/750

Type

Freestanding/built under

Freestanding/built under

Freestanding/built under

Freestanding/Throughfeed

Dishwashing system

Tank system

Tank system

Tank system

Tank system

Shortest programme cycle (secs)

47

55

55

50

Capacity /hr

1600 glasses or 600 plates

3234 glasses or 882 plates

1188 plates

1296 plates

Baskets/hr

77

66

66

72

Dishwashing programmes

3 + 4 additional programmes

3 + 4 additional programmes

3 + 4 additional programmes

3 + additional programmes

**DISHWASHERS
DETERGENT**

ProCare Shine


Product Code
**ProCare Shine
10MA 5L / 10L**
**ProCare Shine
11OB 2kg / 6kg**
**ProCare Shine
12GC 1.28kg**
**ProCare Shine
40 1L / 5L / 10L**
**ProCare
Universal 6kg**

Description

Mildly Alkaline

Oxygen Bleach

Gentle Care

Rinse Aid

Salt

Type

Liquid Concentrate

Powder

80 Tablets

Liquid Concentrate

ProfiLine & Freshwater

•

•

• (for programmes over 10 mins)

•

•

Undercounter & Throughfeed Tank

• (5l & 10l only)

•

Days of Use

ProfiLine (3 cycles/day)

5L : 105 days /
10L : 211 days2kg : 33 days /
6kg : 100 days

26 days

1L : 131 days / 5L : 655
days / 10L : 1310 days

Freshwater (10 cycles/day)

5L : 23 days /
10L : 45 days2kg : 10 days /
6kg : 30 days

8 days

1L : 44 days / 5L : 219
days / 10L : 438 days

Undercounter Tank (40 cycles/day)

5L: 15 days /
10L: 30 days5L : 173 days
10L : 347 days

Throughfeed Tank (100 cycles/day)

5L : 5 days /
10L : 10 days5L : 69 days
10L : 139 days

appWash

appWash, an innovative service from Miele Operations & Payment Solutions GmbH, connects your entire laundry room with a digital all-in-one platform. In an apartment block, student residence or elsewhere; appWash ensures optimal operation for your laundry room. This means less work and maximum transparency for you.



appWash pay

Do you already have an existing laundry room in your apartment block or student residence or would you like to set up a new one? No problem: we can easily equip existing or new machines with our appWash-Pay-System.

1. We set up your online portal linking your washing machines and dryers via the appWash app
2. Customers can immediately use your service on a mobile and cashless basis via service providers, such as PayPal
3. We send you a statement for your business at the end of each month



appWash relax

With appWash Relax, you can be sure to concentrate purely on your core business: appWash takes over full responsibility for your laundry room and manages its operation.

1. We install our own commercial machines including the appWash system
2. appWash takes over customary market pricing and direct billing with the users
3. We are the central point of contact and act as a representative for all processes in your laundry room

SELF SERVICE

02. WASH

01. SORT

1 Read care labels

2 Sort by fabric or color



1 Empty pockets


2 Load machine (don't over-load)

3 Add soap & select program

4 Unload machine

5 Check for lost items

6 Leave door open to air



LABEL LOVE

OPEN 24/7

The digital solution for your laundry room

From invoicing to the entire operation. AppWash brings laundry rooms online and reduces operating costs.



appwash

Powered by

Miele

Miele

Miele GB
Fairacres, Marcham Road, Abingdon, OX14 1TW

 **0330 8387428**  **professional.info@miele.co.uk**

 **www.miele.co.uk/p/**  **@MieleProf**  **mieleprofessional**