

DA 5798 W Next Step  
Wall mounted cooker hood  
with energy-efficient LED lighting and light-touch switches for easy use.



- Design – 893 mm wide stainless steel and glass cooker hood
- Unique user convenience – Con@ctivity
- Powerful – 600 m<sup>3</sup>/h in Booster level
- Energy-efficient and quiet – powerful ECO motor
- Efficient filtration- 10-ply stainless-steel grease filter

EAN: 4002515935590 / Material number: 10749620 / Old Material Number: 28579850D

<b>Construction type</b>	
Wall mounted cooker hood	•
<b>Operating modes</b>	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUW 20
Active charcoal filter (order separately)	DKF 12-P
<b>Design</b>	
Colour	Stainless steel
RAL colours available as customisation on request	•
Customisation possible on request	•
<b>User convenience</b>	
Miele@home	•
Automatic function Con@ctivity	•
Electronic controls	•
Power levels (number without Booster level)	3
Miele@mobile app	•
Programmable Booster level switch-off	•
Run-on time 5/15 min.	•
Grease filter saturation indicator	•
Grease filter saturation indicator programmable	•
Active charcoal filter saturation indicator programmable	•
Silence package	•
Easy-to-clean canopy interior – CleanCover	•
<b>Efficiency and sustainability</b>	
Annual energy consumption in kWh/year	24,1
ECO motor	•
PowerManagement system	•
<b>Filter system</b>	
Number of dishwasher-safe stainless steel grease filters (10-ply)	2
<b>Lighting</b>	
LED	•
Number x W	2 x 3 W
Light intensity in lx	550 lx
Colour temperature in K	3500 Kelvin
Dimmer function	•
<b>Fan</b>	
Dual-action fan	•
DC motor	•
<b>Exhaust air</b>	
Air throughput in Level 1 (m <sup>3</sup> /h) according to EN 61591	180
Air throughput in Level 2 (m <sup>3</sup> /h) according to EN 61591	280
Air throughput in Level 3 (m <sup>3</sup> /h) according to EN 61591	380
Air throughput in Booster level (m <sup>3</sup> /h) according to EN 61591	600
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	35,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	44,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	52,0

DA 5798 W Next Step  
Wall mounted cooker hood  
with energy-efficient LED lighting and light-touch switches for easy use.



EAN: 4002515935590 / Material number: 10749620 / Old Material Number: 28579850D

Sound power in Booster level (dB(A) re 1 pW) acc. to EN 60704-3	63,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	20,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	29,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	37,0
Sound pressure in Booster level (dB(A) re 20 µPa) acc. to EN 60704-2-13	48,0
<b>Recirculation</b>	
Air throughput in Level 1 (m³/h) according to EN 61591	110
Air throughput in Level 2 (m³/h) according to EN 61591	190
Air throughput in Level 3 (m³/h) according to EN 61591	320
Air throughput in Booster level 1 (m³/h) according to EN 61591	460
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	45,0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	53,0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	63,0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	72,0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	30,0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	38,0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	48,0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	57,0
<b>Safety</b>	
Safety switch-off	•
Single-ply safety glass (ESG)	•
<b>Technical data</b>	
Overall hood height for extraction mode and external in mm	660–980
Overall hood height for recirculation and external in mm	790–1110
Overall height for vented and external in in. (mm)	660
Canopy width in mm	893
Overall height for extraction mode and external mode cooker hoods in mm	980
Canopy height in mm	34
Overall height for recirculation in in. (mm)	790
Canopy depth in mm	520
Overall height for recirculation mode cooker hoods in mm	1110
Minimum height above electric hobs in mm	450
Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Net weight in kg	22,0
Length of supply lead in m	1,5
Standard plug fitted	•
Total rated load in kW	0,08


DA 5798 W Next Step  
 Wall mounted cooker hood  
 with energy-efficient LED lighting and light-touch switches for easy use.



EAN: 4002515935590 / Material number: 10749620 / Old Material Number: 28579850D

Voltage in V	230
Fuse rating in A	10
Number of phases	1
Frequency in Hz	50
<b>Installation notes</b>	
Extraction ducting connection at top	•
Extraction connection at top and rear	•
Diameter of exhaust duct in mm	150
Telescopic chimney	•
Combination with WiFi-enabled Miele hob	recommended
<b>Accessories included</b>	
Non-return flap	•
<b>Optional accessories</b>	
Active charcoal filter	Nein
Active charcoal filter, can be reactivated	DKF 12-R

DA 5798 W Next Step  
Wall mounted cooker hood  
with energy-efficient LED lighting and light-touch switches for easy use.

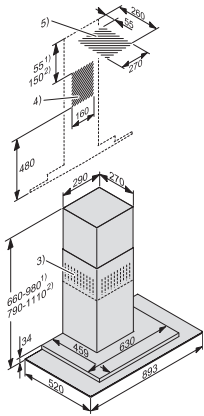

DA 5798 W (installation drawing)

1) Extraction, 2) Recirculation, 3) Ventilation grille positioned at top for recirculation, 4+5) Installation cut-out (5 not required for recirculation mode)