

Professional washing machine, electrically heated, with drain valve and detergent drawer, M Touch Pro Plus freely programmable, for marine use.




- Drum volume 180 l 180 l, maximum load size 20.0 kg 20.0 kg
- Top cleaning & consumption values innovative Miele technology
- Ideal operation thanks to colour touch display – M Touch Pro Plus
- Simple and safe operation thanks to automatic door lock
- Connected for the future using LAN and WiFi

EAN: 4002516392521 / Material number: 11683000 / Old Material Number: 51920005SOM

Construction type and version	
Construction type	Front loader
Range	Performance Plus
Front	Stainless steel
Control panel colour	Stainless steel
Maximum load with a load ratio of 1:9 in kg	20.0
Load ratio	1:9
Load in kg	20.0
Drum volume in I	180
Door opening [Ø] in mm	415
Door opening angle in degrees	180
Door hinge	right
Automatic door lock	- Ingint
Innovative suds container	•
Maintenance-free motor with frequency converter	•
Patented honeycomb drum 2.0	•
Application	-
Suitable for offshore use	•
Suitable for marine use	•
Performance data	-
Tested virucidal efficacy	•
Proven hygiene	•
Specific water consumption for cold water connection in I/	6.20
kg	0.20
Specific energy consumption for cold water connection in kWh/kg	0.14
Specific water consumption for hot water connection in I/kg	5.90
Specific energy consumption for hot water connection in kWh/kg	0.06
Water consumption with cold water connection in I	124.0
Water consumption for cold water connection in Mops standard 60 °C programme in I	234.3
Energy consumption with cold water connection in kW	2.80
Energy consumption for cold water connection in Mops standard 60 °C programme in kWh	4.10
Programme duration in minutes with cold water connection	55
Water consumption with hot water connection in I	118.0
Water consumption for hot water connection in Mops standard 60 °C programme in I	229.0
Energy consumption with hot water connection in kW	1.20
Energy consumption for hot water connection in Mops standard 60 °C programme in kWh	1.70
Programme duration in minutes with cold water and hot water connection	44
Water consumption in ECO programme with cold water connection in I	116.0
Energy consumption in ECO programme with cold water	2.00
Programme duration in minutes with cold water connection	35
in ECO programme	
Water consumption in ECO programme with hot water connection in I	114.0
Energy consumption in ECO programme with hot water	0.60



Professional washing machine, electrically heated, with drain valve and detergent drawer, M Touch Pro Plus freely programmable, for marine use.

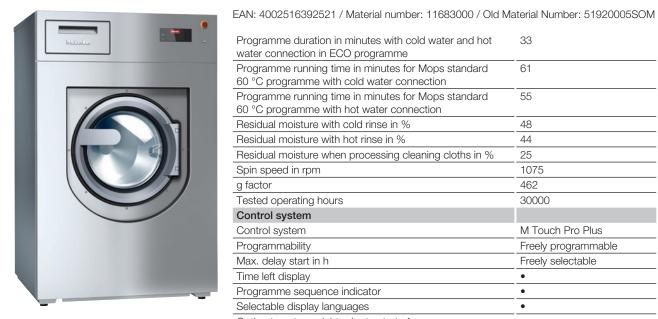

	00
Programme duration in minutes with cold water and hot water connection in ECO programme	33
Programme running time in minutes for Mops standard	61
60 °C programme with cold water connection	
Programme running time in minutes for Mops standard 60 °C programme with hot water connection	55
Residual moisture with cold rinse in %	48
Residual moisture with hot rinse in %	44
Residual moisture when processing cleaning cloths in %	25
Spin speed in rpm	1075
g factor	462
Tested operating hours	30000
Control system	
Control system	M Touch Pro Plus
Programmability	Freely programmable
Max. delay start in h	Freely selectable
Time left display	•
Programme sequence indicator	
Selectable display languages	
Option to enter weight prior to start of programme	•
Standard/target grp programmes	•
Basic programmes	
Dispensing	
Detergent drawer	<u>3 compartments</u>
Maximum number of connections for liquid dispenser pumps [number]	12
Empty sensor	•
Empty sensor Standard electrical connection	•
	• Electric
Standard electrical connection	Electric 3 AC 480V 60HZ
Standard electrical connection Heating type	
Standard electrical connection Heating type Electrical connection	3 AC 480V 60HZ
Standard electrical connection Heating type Electrical connection Heater rating in kW	3 AC 480V 60HZ 19.50
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW	3 AC 480V 60HZ 19.50 22.50
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A	3 AC 480V 60HZ 19.50 22.50
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection	3 AC 480V 60HZ 19.50 22.50 35
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1	3 AC 480V 60HZ 19.50 22.50 35 3 AC 440V 60HZ
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW	3 AC 480V 60HZ 19.50 22.50 35 3 AC 440V 60HZ 16.50 19.50
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connection Heater rating in kW Total connected load in kW Fuse rating in kW Total connected load in kW Fuse rating in A	3 AC 480V 60HZ 19.50 22.50 35 3 AC 440V 60HZ 16.50
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connection Heater rating in kW Total connected load in kW Fuse rating in kW Total connected load in kW Fuse rating in A Water connection/drainage	3 AC 480V 60HZ 19.50 22.50 35 3 AC 440V 60HZ 16.50 19.50 35
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Water rating in A Water connection/drainage Cold water [number]	3 AC 480V 60HZ 19.50 22.50 35 3 AC 440V 60HZ 16.50 19.50 35 35 3 x 1/2" hose w/ 3/4" union
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in kW Total connected load in kW Fuse rating in A Water connection/drainage Cold water [number] Hot water [number]	3 AC 480V 60HZ 19.50 22.50 35 3 AC 440V 60HZ 16.50 19.50 35 3 x 1/2" hose w/ 3/4" union 1x 1/2" hose w/ 3/4" th. union
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Water rating in A Water connection/drainage Cold water [number]	3 AC 480V 60HZ 19.50 22.50 35 3 AC 440V 60HZ 16.50 19.50 35 3 x 1/2" hose w/ 3/4" union 1x 1/2" hose w/ 3/4" th.
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Water rating in A Water connection/drainage Cold water [number] Hot water (optional) [number] Dump valve	3 AC 480V 60HZ 19.50 22.50 35 3 AC 440V 60HZ 16.50 19.50 35 3 x 1/2" hose w/ 3/4" union 1x 1/2" hose w/ 3/4" th. union
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Water rating in A Water connection/drainage Cold water [number] Hot water (optional) [number]	3 AC 480V 60HZ 19.50 22.50 35 3 AC 440V 60HZ 16.50 19.50 35 3 x 1/2" hose w/ 3/4" union 1x 1/2" hose w/ 3/4" th. union 2 x 1/2" w/ 3/4" union
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in KW Total connected load in kW Fuse rating in A Water connection/drainage Cold water [number] Hot water [number] Hard water (optional) [number] Dump valve Dimensions and weight External dimensions, height in mm	3 AC 480V 60HZ 19.50 22.50 35 3 AC 440V 60HZ 16.50 19.50 35 3 x 1/2" hose w/ 3/4" union 1x 1/2" hose w/ 3/4" th. union 2 x 1/2" w/ 3/4" union
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Water connected load in kW Fuse rating in A Water connection/drainage Cold water [number] Hot water (number] Hard water (optional) [number] Dump valve Dimensions and weight	3 AC 480V 60HZ 19.50 22.50 35 3 AC 440V 60HZ 16.50 19.50 35 3 x 1/2" hose w/ 3/4" union 1x 1/2" hose w/ 3/4" th. union 2 x 1/2" w/ 3/4" union DN 70
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in KW Total connected load in kW Fuse rating in A Water connection/drainage Cold water [number] Hot water [number] Hard water (optional) [number] Dump valve Dimensions and weight External dimensions, height in mm	3 AC 480V 60HZ 19.50 22.50 35 3 AC 440V 60HZ 16.50 19.50 35 35 35 3 AC 440V 60HZ 16.50 19.50 35 3 x 1/2" hose w/ 3/4" union 1x 1/2" hose w/ 3/4" th. union 2 x 1/2" w/ 3/4" union DN 70 1450
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Water rating in kW Total connected load in kW Fuse rating in A Water connection/drainage Cold water [number] Hot water (number] Hard water (optional) [number] Dump valve Dimensions and weight External dimensions, height in mm External dimensions, width in mm	3 AC 480V 60HZ 19.50 22.50 35 3 AC 440V 60HZ 16.50 19.50 35 3 X 1/2" hose w/ 3/4" union 1x 1/2" hose w/ 3/4" th. union 2 x 1/2" w/ 3/4" union DN 70 1450 924
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Water rating in kW Total connected load in kW Fuse rating in A Water connection/drainage Cold water [number] Hot water [number] Hard water (optional) [number] Dump valve Dimensions and weight External dimensions, height in mm External dimensions, depth in mm	3 AC 480V 60HZ 19.50 22.50 35 3 AC 440V 60HZ 16.50 19.50 35 35 35 3 AC 440V 60HZ 16.50 19.50 35 3 x 1/2" hose w/ 3/4" union 1x 1/2" hose w/ 3/4" th. union 2 x 1/2" w/ 3/4" union DN 70 1450 924 935
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in kW Total connected load in kW Fuse rating in A Water connection/drainage Cold water [number] Hot water [number] Hard water (optional) [number] Dump valve Dimensions and weight External dimensions, height in mm External dimensions, depth in mm External dimensions, gross height in mm	3 AC 480V 60HZ 19.50 22.50 35 3 AC 440V 60HZ 16.50 19.50 35 3 AC 440V 60HZ 16.50 19.50 35 3 x 1/2" hose w/ 3/4" union 1x 1/2" hose w/ 3/4" union 1x 1/2" hose w/ 3/4" union 2 x 1/2" w/ 3/4" union DN 70 1450 924 935 1585
Standard electrical connection Heating type Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Possible voltage variant 1 Electrical connection Heater rating in kW Total connected load in kW Fuse rating in A Water connected load in kW Fuse rating in A Water connection/drainage Cold water [number] Hot water [number] Hard water (optional) [number] Dump valve Dimensions and weight External dimensions, height in mm External dimensions, depth in mm External dimensions, gross height in mm External dimensions, gross width in mm	3 AC 480V 60HZ 19.50 22.50 35 3 AC 440V 60HZ 16.50 19.50 35 3 x 1/2" hose w/ 3/4" union 1x 1/2" hose w/ 3/4" th. union 2 x 1/2" w/ 3/4" union DN 70 1450 924 935 1585 1090



Professional washing machine, electrically heated, with drain valve and detergent drawer, M Touch Pro Plus freely programmable, for marine use.

EAN: 4002516392521 / Material number: 11683000 / Old Material Number: 51920005SOM

Gross weight in kg	428
Maximum floor load in N/m ²	5942
Emissions data	
Emission sound pressure level in the workplace	67 dB(A) re 20 µPa
Heat dissipation into the room in MJ/h	6.48
Features	
Patented pre-spin	<u>•</u>
Cloth reprocessing	<u>•</u>
3-dimensional imbalance monitoring	•
Disinfection rinse	• • • • • • • • • • • • • • • • • • •
Efficient scoop-and-ladle ribs	
EcoSpeed	•
Spring-in-spring system	•
Temperature monitoring	•
Special heater element	•
Automatic load control+	•
Volumetric flow meter (optional)	•
Weighing plinth (optional)	•
Add laundry	•
Programme selection via colour frame	•
Emergency switch-off	•
Machine-independent accessories	•
Efficiency and sustainability	
Recycling rate in %	92
Connection options	
Payment system (optional)	•
Optical interface for service access	•
Peak load cut-out/energy management (optional)	•
Water recovery (optional)	•
LAN	•
WiFi	•
Connector Box	•
Capacities	
Respirator masks [number]	15
Helmets [number]	5
Overalls [number]	3
Over jackets [number]	5
Chemical protection suits [number]	2
	2
Synthetic duvets [number]	
Synthetic pillows [number]	4
Down duvets [number]	2
Down pillows [number]	4
Cloths, 22 g [number]	456
Cotton mops, 40 cm / 190 g [number]	106
Cotton mops, 50 cm / 220 g [number]	91
Microfibre mops, 40 cm / 120 g [number]	167
Microfibre mops, 50 cm / 170 g [number]	117
	200
Mops, office, 100 g [quantity] Mops, stairway, 150 g [quantity]	130



Professional washing machine, electrically heated, with drain valve and detergent drawer, M Touch Pro Plus freely programmable, for marine use.



EAN: 4002516392521 / Material number: 11683000 / Old Material Number: 51920005SOM

Standards, test certificates and symbols	
CE	•
VDE-EMC	•
VDE	•
Splash-proof safety rating IPX4	•
UKCA	•
WEEE	•
EAC	•
Complies with Machinery Directive 2006/42/EC	•

lachinery Directive 2006/42/EC